

MODEL FSA with VIEWPORT

1" Deep • Plexiglass or Wireglass • Single or Double Panel • Duct Access Door

STANDARD MATERIALS AND CONSTRUCTION

- FRAME:** 22-GA galvanized steel
- DOOR PANEL:** 24-GA galvanized steel
- INSULATION:** 1" fiberglass
- FINISH:** Mill

OPTIONS



- Hinged or Cammed
- Single or Double Pane
- Wireglass
- Plexiglass
- Fiberboard Ductwork
- Flanged
- High Pressure

NOTES

1. "A" width and "B" height are opening dimensions.
2. Double window doors 12" x 12" and larger are insulated with 1" thick rigid fiberglass.
3. Standard Pressure Rating is 4.5 in.wg. High Pressure Rating is 10 in.wg.
4. On non-standard doors, the height is always the larger dimension.

DOOR SIZES

Panels	Standard Sizes	Round Glass Size
FSA	6"W x 6"H	2 ³ / ₄ "
	8"W x 8"H	4 ³ / ₄ "
	10"W x 10"H	4 ³ / ₄ "
	12"W x 12"H	6 ³ / ₄ "
	14"W x 14"H	6 ³ / ₄ "
	16"W x 16"H	6 ³ / ₄ "
	18"W x 18"H	6 ³ / ₄ "
	20"W x 20"H	6 ³ / ₄ "
	24"W x 24"H	6 ³ / ₄ "

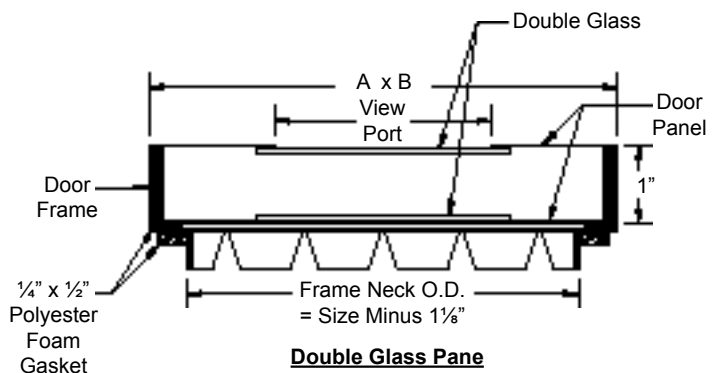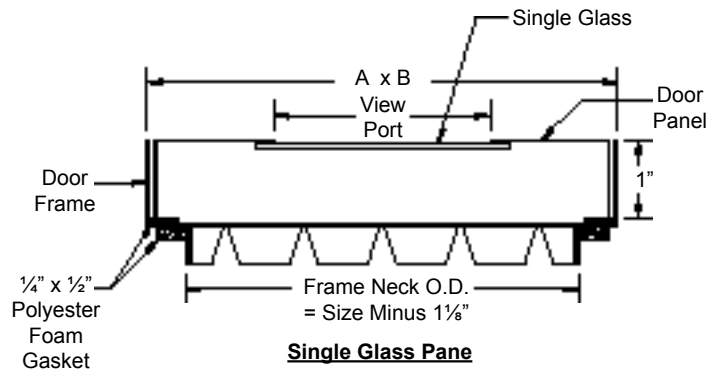

MODEL FSA with Viewport

1" Deep • Plexiglass or Wireglass • Single or Double Panel • Duct Access Door

This page intentionally left blank.