

STANDARD MATERIALS AND CONSTRUCTION

FRAME: .081" thick (nominal) extruded aluminum, 6063-T52/T6 alloy.

BLADE: .064" thick (nominal) extruded aluminum, 6063-T52/T6 alloy.
Blades approximately 1 3/4" on centers.

LOUVER FACE: Full jamb section, with blades and head contained in jams.

SCREEN: (When indicated.)

1/2" flattened aluminum (.051" thick),

-or- 1/2" sq. mesh, intermediate double-crimped aluminum wire, .063" dia.,

-or- 1 5/16 mesh, .011" dia. aluminum wire, insect screen.

FINISH: Mill

OPTIONS



Finish - Baked Enamel, Kynar, Anodize


NOTES

1. Nominal deductions will be made to the opening size given.
2. Approximate shipping weight is 3.8 lbs./sq.ft.

LOUVER SIZES

Min Panel	Max Single Panel
12"W x 12"H	60"W x 96"H

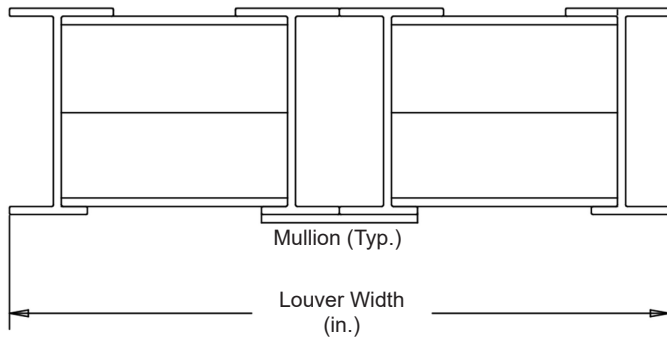
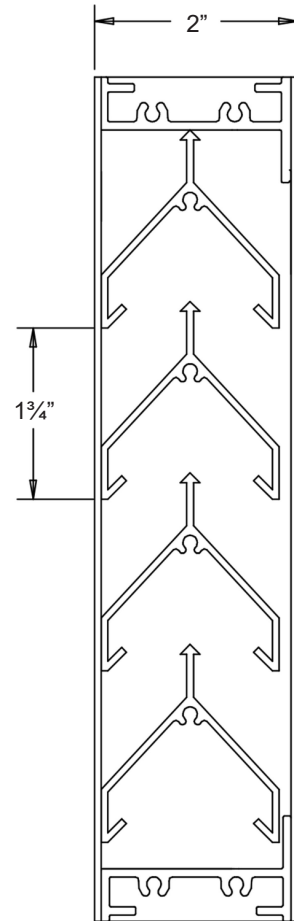


													
Item #	Qty	Width	Height	Width	Height	Mullion	Type	Location					
		Opening Size		Louver Size			Screens						Union Made
Arch. / Eng. :						EDR:		ECN:		Job:			
Contractor:													
Project:						Date:		DWN:		DWG:			

PERFORMANCE DATA

Pressure Drop: .40 in. w.g. at 1000 fpm (intake)
 Free Area: 4.43 sq.ft. = 27.7% for 48"W x 48"H sample tested in accordance with AMCA Standard 500-L.
 Beginning Point of Water Penetration: 924 fpm

Ratings do not include effects of a screen.

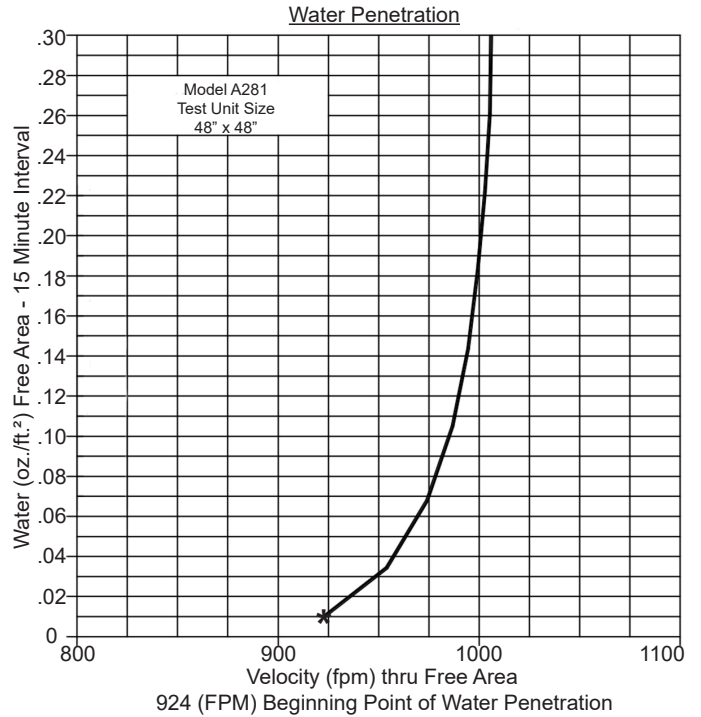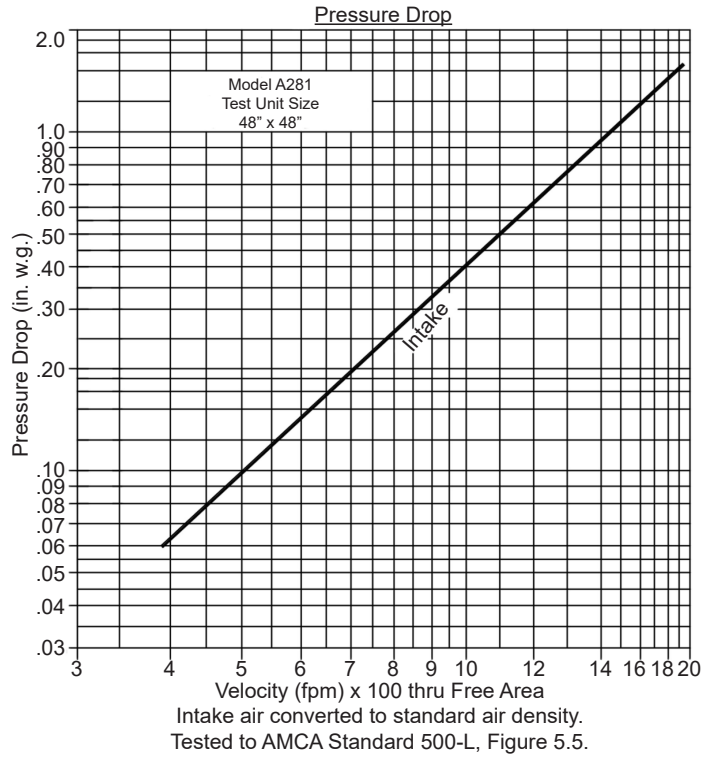

Free Area (sq.ft.)

		Width (in.)								
		12"	18"	24"	30"	36"	42"	48"	54"	60"
Height (in.)	12"	.26	.42	.57	.73	.88	1.04	1.20	1.35	1.51
	24"	.50	.80	1.10	1.40	1.70	2.00	2.30	2.60	2.90
	36"	.74	1.18	1.63	2.07	2.52	2.96	3.70	3.85	4.29
	48"	.98	1.57	2.16	2.74	3.33	3.92	4.43	5.10	5.68
	60"	1.22	1.95	2.68	3.42	4.15	4.88	5.61	6.34	7.08
	72"	1.46	2.34	3.21	4.09	4.96	5.84	6.72	7.59	8.47
	84"	1.70	2.72	3.74	4.76	5.78	6.80	7.82	8.84	9.86
96"	2.02	3.24	4.45	5.67	6.88	8.10	9.31	10.53	11.74	