Dual Acting

Handles

Standard Access Doors • 11/2" or 2" Deep • In-Swing • With Louver • Extruded Aluminum

Standard Construction and Materials

FLANGED FRAME: .080" thick (nominal) 6063-T52/T6 extruded aluminum. **DOOR FRAME:** .080" thick (nominal) 6063-T52/T6 extruded aluminum.

DOOR PANELS: 20 GA. galvanized steel.

INSULATION: 2.25 lb. density polyurethane foam.

HANDLES: Dual-acting die cast zinc.

GASKET: Continuous length extruded foam santoprene.

HINGE: Stainless steel continuous type.

FINISH: Mill.

Options

Door panel material: bonderized steel, stainless steel, aluminum Finishes - Baked Enamel, Baked Epoxy, or Prime Coat

Notes

- 1. Hinge always furnished on "B" height dimension.
- 2. (L) designates doors with louvers. Specify (L/H) left hand or (R/H) right hand hinge when viewing from the outside.
- 3. Minimum louver size is 12" x 12". Maximum louver size is full door panel size. For louver location, use "X" and "Y" dimensions.
- 4. Unless otherwise specified, door will be fabricated 1/4" under listed size. Dimensional tolerance is ± .075.
- 5. Door width cannot exceed two times its height.
- 6. Please refer to the installation instructions for mounting of handles and door assembly mounting.
- 7. In-swing doors are recommended for positive pressures. Out-swing doors are recommended for negative pressures.

Door Sizes


Min Size	Max Size				
12"W x 12"H	48"W x 96"H				

Model	'C' Depth
15	11/8"
20	23/8"

Door Panel View Minus Door Frame (Left hinge units shown.)

Not to scale.

'X'

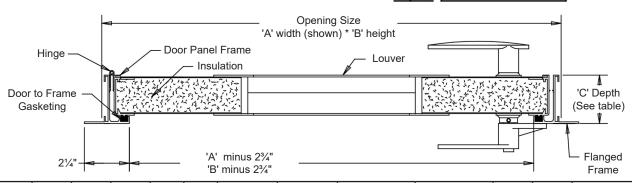

Item #	Qty	-151	-201	Left Hand	Right Hand	"A" Width	"B" Height	Model -15I (EA-150-F)	Model -201 (EA-200-F)	Х	Υ	00
		Door Model Door Hinge		Opening Size		Louver Size (Width, Height, O.D. of Flange)		Louver Location		<u>Union Made</u>		
Arch. / Eng.:		EDR:		ECN:		Job:						
Contractor:												
Project:					Date:		DWN:			DWG:		

In the interest of product development, Cesco Products reserves the right to make changes without notice.



450 Riverside Dr • Wyalusing PA, 18853 Phone: 570-746-1888 • Fax: 570-746-9286 www.cescoproducts.com