

Standard Construction and Materials


- FRAME:** .125" thick (nominal) extruded aluminum.
- BLADE:** .125" thick (nominal) extruded aluminum.
- SCREEN:** ¹⁹/₁₆ Mesh, .011" dia. aluminum wire, insect screen.
- FINISH:** Clear anodized finish is standard.

Options

Finish - Baked Enamel, Kynar, Anodize


Notes

1. Nominal deductions will be made from opening dimensions given unless otherwise stated.
2. Many stock sizes are available for immediate shipment. Brick vents are also available in practically any width or height.

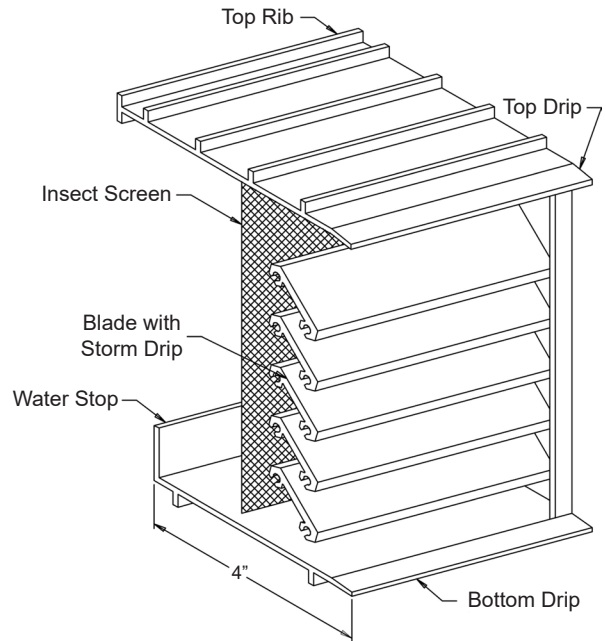


Ordered Size	Minimum Opening Size	Free Area (Sq. In.)
12" x 4 ³ / ₄ "	12 ¹ / ₄ " x 5 ¹ / ₄ "	17.28
12" x 2 ³ / ₈ "	12 ¹ / ₄ " x 2 ⁷ / ₈ "	6.34
8 ¹ / ₈ " x 2 ³ / ₈ "	8 ³ / ₈ " x 2 ⁷ / ₈ "	4.18
8 ¹ / ₈ " x 4 ³ / ₄ "	8 ³ / ₈ " x 5 ¹ / ₄ "	11.52
8 ¹ / ₈ " x 7 ³ / ₄ "	8 ³ / ₈ " x 8 ¹ / ₄ "	19.58
16 ¹ / ₂ " x 2 ³ / ₈ "	16 ³ / ₄ " x 2 ⁷ / ₈ "	8.64
16 ¹ / ₂ " x 4 ³ / ₄ "	16 ³ / ₄ " x 5 ¹ / ₄ "	28.22
16 ¹ / ₂ " x 7 ³ / ₄ "	16 ³ / ₄ " x 8 ¹ / ₄ "	40.32
24" x 4 ³ / ₄ "	24 ¹ / ₄ " x 5 ¹ / ₄ "	39.02
24" x 7 ³ / ₄ "	24 ¹ / ₄ " x 8 ¹ / ₄ "	58.75

For custom size Brick Vents, contact customer service for details.



Straight Ducts

Fastened securely to vent 24 GA. galvanized steel standard. Specify wall thickness ("A" dimension)

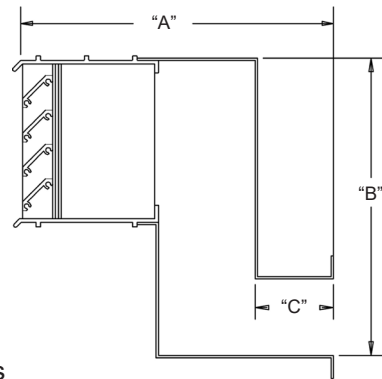

"Z" Ducts

Fastened securely to vent 24 GA. galvanized steel standard. Use when space to be vented is below grade. Provide dimensions "A", "B", and "C".

For handwritten orders, use the schedule block on page 2.

In the interest of product development, Cesco Products reserves the right to make changes without notice.

Brick Vent • 4" Deep • 45° Straight Blades • Stationary • Extruded Aluminum

Item	Qty	Opening Size		Finish	Tagging	Net Each	Total
		Width ("A")	Height ("B")				



450 Riverside Dr • Wyalusing PA, 18853
 Phone: 570-746-1888 • Fax: 570-746-9286
www.cescoproducts.com