

Standard Construction and Materials

FRAME: .081" thick (nominal) extruded aluminum 6063-T52/T6 alloy.

BLADE: .081" thick (nominal) extruded aluminum 6063-T52/T6 alloy.
Blades spaced approximately 3" on center with architectural hidden mullions.

SUPPORTS: Shall incorporate rear angle 2" x 2" x 1/4" extruded aluminum to withstand windload of 20 PSF, approximately 90 mph wind. Supports vary as required, per wind load.
Spaced approximately 60" on centers.

FINISH: Mill

Options

Variations - Mitered Corner, Post Corner, Hinged Access, and Cap Covers.


Finishes - Kynar, Baked Enamel, Clear and Color Anodize (Consult the factory for details.)

Notes



1. "Maximum panel size should not exceed 60 sq. ft. or 120"W x 72"H. Louver sections larger than the factory maximum size will require field assembly of smaller sections.
2. Approximate shipping weight is 4.5 lbs./sq.ft.

Screen Sizes

Min Panel	Max Single Panel
12"W x 12"H	120"W x 72"H (60 sq.ft.)

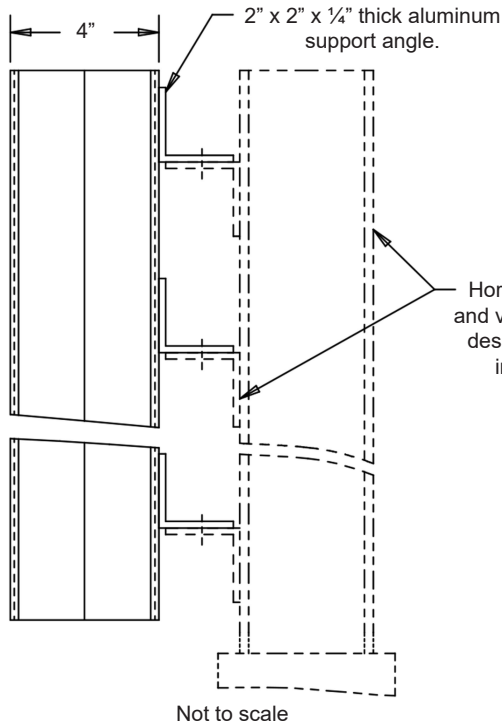

Horizontal support angle and vertical column support designed, furnished, and installed by others.

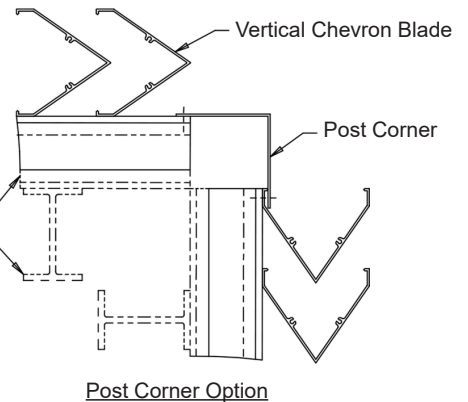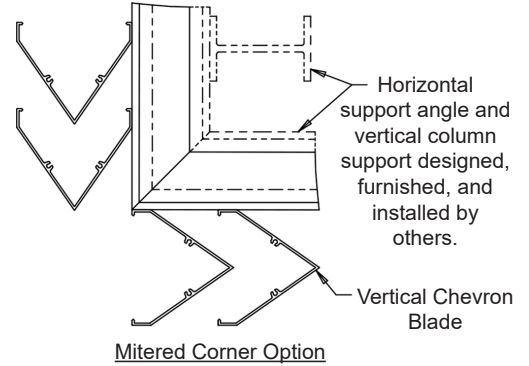

<u>Item #</u>	<u>Qty</u>	<u>Height</u>	<u>Width</u>			<u>Mullion</u>	<u>Mitered</u>	<u>Post</u>	
		<u>Screen Size</u>				<u>Corner Type</u>		<u>Union Made</u>	
<u>Arch./ Eng.:</u>				<u>EDR:</u>		<u>ECN:</u>		<u>Job:</u>	
<u>Contractor:</u>									
<u>Project:</u>				<u>Date:</u>		<u>DWN:</u>		<u>DWG:</u>	

In the interest of product development, Cesco Products reserves the right to make changes without notice.



450 Riverside Dr • Wyalusing PA, 18853
Phone: 570-746-1888 • Fax: 570-746-9286
www.cescoproducts.com