MODEL X6D3AM

Extruded Aluminum Damper • 6" Deep • Drainable Baffle Blades • Adjustable • Concealed Actuator

Page 1

Standard Construction and Materials

FRAME: .081" thk. (nominal) extruded aluminum, 6063-T52/T6 alloy.

Channel type.

BLADE: .081" thk. (nominal) extruded aluminum 6063-T52/T6 alloy.

Blades are approximately 41/2" on centers.

LOUVER FACE: Full width sill with drain head and drain blades

contained within drain jambs.

SHAFT: .50" dia aluminum "Pin-Lock" rod.

BEARINGS: Celcon bearing material so that there will be no metal to

metal friction.

LINKAGE: Extruded aluminum, concealed in the channel out of

the airstream. The pivots, which rotate in Celcon bearings, are .50" dia. plated and machined steel. The pivot is locked to the $\frac{5}{6}$ " dia. aluminum linkage rod by a $\frac{1}{4}$ - 20 set screw

with epoxy locking patch.

SEALS: Extruded silicone rubber seals at blade edge.

Polyurethane at jambs.

SCREEN: (When indicated, in a removable frame)

½" flattened aluminum, .051" thk.,

-or- $\frac{1}{2}$ " sq. mesh intermediate double crimped aluminum wire, .063" dia.,

-or- ¹⁸/₁₆ aluminum mesh insect screen, .011" dia.

FINISH: Mill.

ACTUATOR: 120 VAC spring return normally closed.

133 in-lbs. torque.

Options


Finishes - Enamels, Epoxies, etc. Other screens also available.


Notes

- 1. Nominal deductions will be made to the opening size given.
- 2. Approximate shipping weight is 5.6 lbs./sq.ft.

Louver Sizes

Min Panel	Max Single Panel				
12"W x 19"H	48"W x 96"H				

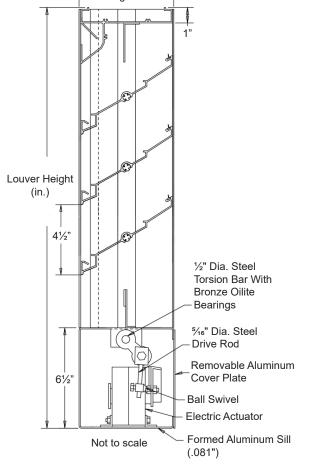



										NO.
<u>ltem #</u>	<u>Oty</u>	Width	Height	Width	Height	N 4	Туре	Location		00
		<u>Openi</u>	ng Size	Louv	<u>er Size</u>	<u>Mullion</u>	<u>Screens</u>			<u>Union Made</u>
Arch. / Eng.:						EDR:		ECN:	<u>Job:</u>	
<u>Contractor:</u>										
<u>Project:</u>						<u>Date:</u>		<u>DWN:</u>	<u>DWG:</u>	

In the interest of product development, Cesco Products reserves the right to make changes without notice.



450 Riverside Dr • Wyalusing PA, 18853 Phone: 570-746-1888 • Fax: 570-746-9286 www.cescoproducts.com