Extruded Aluminum Louver • 6" Deep • Adjustable Straight Blades • Non-Drainable • Concealed Actuator

Standard Construction and Materials

FRAME: .081" thk. (nominal) extruded aluminum, 6063-T52/T6 alloy. **BLADE:** .081" thk. (nominal) extruded aluminum, 6063-T52/T6 alloy.

Blades are approximately 4½" on centers.

LOUVER FACE: Full width sill with drain head and non-drain blades

contained within drain jambs.

SHAFT: .50" dia aluminum "Pin-Lock" rod.

BEARINGS: "Double Sealed" bearing, with inner bearing riding inside

a polycarbonate outer bearing, designed so that Celcon bearing material will not cause metal to metal friction.

LINKAGE: Extruded aluminum, concealed in the channel out of

the airstream. Pivots, which rotate in Celcon bearings, are .50" dia. plated and machined steel. The pivot is locked to the 5/16" dia. aluminum linkage rod by a 1/4 - 20 set screw

with epoxy locking patch.

SEALS: Extruded silicone rubber seals at blade edge.

Polyurethane at jambs.

SCREEN: (When indicated, in a removable frame)

½" flattened aluminum, .051" thk.,

-or- 1/2" sq. mesh intermediate double crimped

aluminum wire, .063" dia.,

-or- 18/16 aluminum mesh insect screen, .011" dia.

ACTUATOR: 120 VAC, spring return normally closed.

133 in-lbs. torque.

FINISH: Mill.

Options


Finishes - Enamels, Epoxies, etc. Other screens also available.


Notes

- 1. Nominal deductions will be made to the opening size given.
- 2. Approximate shipping weight is 5.0 lbs./sq.ft.

Louver Sizes

Min Panel	Max Single Panel
12"W x 19"H	48"W x 96"H

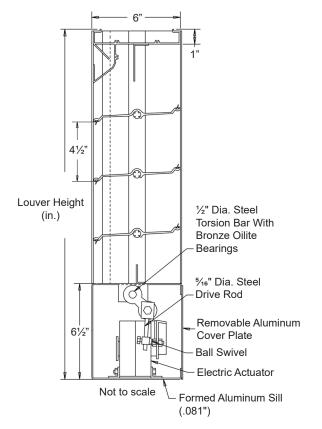

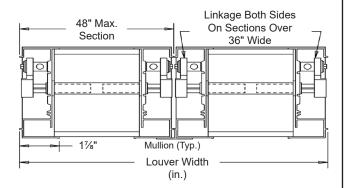

		\	I I a t a la s	\	1.1 a f a la a		T	Lasation			
<u>ltem #</u>	<u>Oty</u>	Width	Height	Width	Height	<u>Mullion</u>	Туре	Location			OVAL
		<u>Openi</u>	ng Size	Louv	<u>er Size</u>	<u>iviuiliori</u>	<u>Screens</u>				<u>Union Made</u>
<u>Arch. / Eng.:</u>						EDR:		ECN:		<u>Job:</u>	
<u>Contractor:</u>											
<u>Project:</u>						<u>Date:</u>		<u>DWN:</u>		<u>DWG:</u>	

In the interest of product development, Cesco Products reserves the right to make changes without notice.



450 Riverside Dr • Wyalusing PA, 18853 Phone: 570-746-1888 • Fax: 570-746-9286 www.cescoproducts.com