

Standard Brick Vents

Brick Vent • 4" Deep • 45° Straight Blades • Stationary • Extruded Aluminum

STANDARD CONSTRUCTION

- FRAME:** .125" thick (nominal) extruded aluminum.
- BLADE:** .125" thick (nominal) extruded aluminum.
- SCREEN:** $\frac{3}{16}$ " Mesh, .011" dia. aluminum wire, insect screen.
- FINISH:** Clear anodized finish is standard.


OPTIONS

Finish - Baked Enamel, Kynar, Anodize


NOTES

1. Nominal deductions will be made from opening dimensions given unless otherwise stated.
2. Many stock sizes are available for immediate shipment. Brick vents are also available in practically any width or height.

| Ordered Size | Minimum Opening Size | Free Area (Sq. In.) |
|--|--|---------------------|
| 12" x 4 $\frac{3}{4}$ " | 12 $\frac{1}{4}$ " x 5 $\frac{1}{4}$ " | 17.28 |
| 12" x 2 $\frac{3}{8}$ " | 12 $\frac{1}{4}$ " x 2 $\frac{7}{8}$ " | 6.34 |
| 8 $\frac{1}{8}$ " x 2 $\frac{3}{8}$ " | 8 $\frac{3}{8}$ " x 2 $\frac{7}{8}$ " | 4.18 |
| 8 $\frac{1}{8}$ " x 4 $\frac{3}{4}$ " | 8 $\frac{3}{8}$ " x 5 $\frac{1}{4}$ " | 11.52 |
| 8 $\frac{1}{8}$ " x 7 $\frac{3}{4}$ " | 8 $\frac{3}{8}$ " x 8 $\frac{1}{4}$ " | 19.58 |
| 16 $\frac{1}{2}$ " x 2 $\frac{3}{8}$ " | 16 $\frac{3}{4}$ " x 2 $\frac{7}{8}$ " | 8.64 |
| 16 $\frac{1}{2}$ " x 4 $\frac{3}{4}$ " | 16 $\frac{3}{4}$ " x 5 $\frac{1}{4}$ " | 28.22 |
| 16 $\frac{1}{2}$ " x 7 $\frac{3}{4}$ " | 16 $\frac{3}{4}$ " x 8 $\frac{1}{4}$ " | 40.32 |
| 24" x 4 $\frac{3}{4}$ " | 24 $\frac{1}{4}$ " x 5 $\frac{1}{4}$ " | 39.02 |
| 24" x 7 $\frac{3}{4}$ " | 24 $\frac{1}{4}$ " x 8 $\frac{1}{4}$ " | 58.75 |

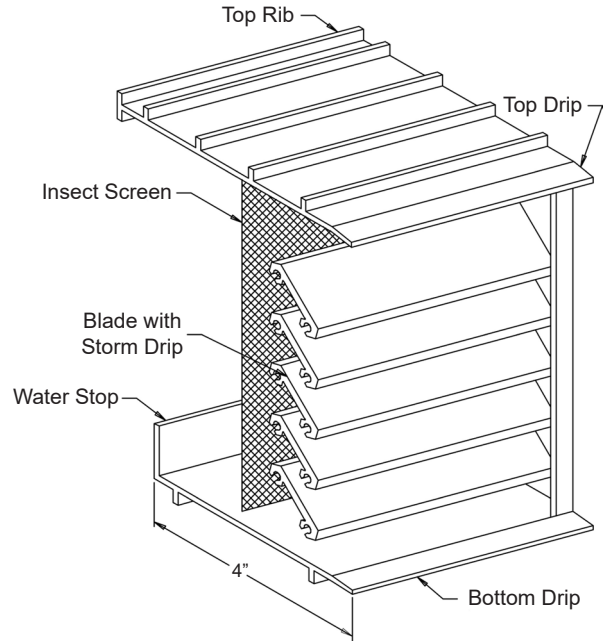


For custom size Brick Vents, contact customer service for details.



Straight Ducts

Fastened securely to vent 24 GA. galvanized steel standard. Specify wall thickness ("A" dimension)

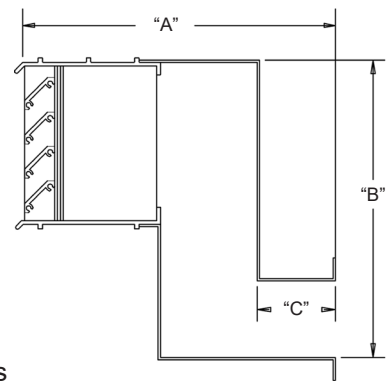

"Z" Ducts

Fastened securely to vent 24 GA. galvanized steel standard. Use when space to be vented is below grade. Provide dimensions "A", "B", and "C".

For handwritten orders, use the schedule block on page 2.

In the interest of product development, Louvers & Dampers reserves the right to make changes without notice.

www.louvers-dampers.com

450 Riverside Drive • Wyalusing PA, 18853 • Phone 570-746-1888 • Fax 570-746-9286



Standard Brick Vents

Brick Vent • 4" Deep • 45° Straight Blades • Stationary • Extruded Aluminum

| Item | Qty | Opening Size | | Finish | Tagging | Net Each | Total |
|------|-----|--------------|--------------|--------|---------|----------|-------|
| | | Width ("A") | Height ("B") | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

