

# STANDARD CONSTRUCTION

## Formed Aluminum Curb Extension

SHELL &

**BASEPLATE:** .063" thick (nominal) aluminum alloy 3003-H14. All seams

are fully welded and sprayed with protective coating.

FINISH: Mill.

#### Formed Steel Curb Extension

SHELL &

BASEPLATE: 18 GA. galvanized steel. All seams are fully welded and

sprayed with protective coating.

FINISH: Mill.

## **OPTIONS**

**Aluminum Material** - Available in .081" - .125" thick 3003-H14 alloy. **Steel Material** - Available in various gauges of galvanized, galvaneal or stainless.

**Platform Cap** - A  $\frac{3}{4}$ " plywood top with a metal cap fabricated of the same material as the product.

**Wood Nailer** - Factory installed wood nailer for equipment mounting is mechanically fastened to top perimeter.


**Gasket** - '4'' thick polyurethane foam gasket can be installed, lining the entire top perimeter.


Insulation - Available with 1" or 2" semi-rigid insulation.

Access Panels - To provide a passageway to internal equipment, an access opening is cut and lined with a protective vinyl edge seal and the cover panel is mechanically fastened over the opening. Minimum height restrictions apply. Louvered Vents - Provides airflow through the curb. Units are available with 6"W x 1/8"H louvered vents, with 4 per side. Minimum height restrictions apply. Finishes - A wide selection of finishes include baked enamel, epoxy, or prime coat. Aluminum curb finishes include Kynar, clear or color anodize.

# **NOTES**

- 1. "A" width, "B" length and "C" height are outside dimensions.
- 2. If height or width exceed 90", multi-section construction may be required.

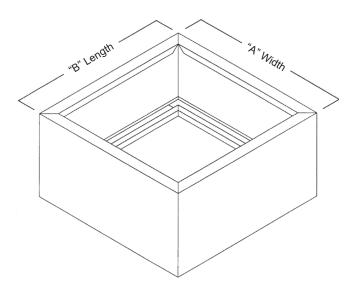

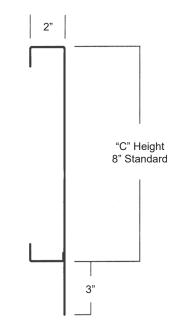

Item #	Qty	Width	Length	Hei	ght	Aluminum	Steel	Height Rise	Direction	No.
item#		Opening Dimensions				Material		Pitch / Peak		<u>Union Made</u>
Arc	Arch. / Eng.:			EDR:		ECN:		Job:		
Co	Contractor:									
Co	iiti actor.									

In the interest of product development, Louvers & Dampers reserves the right to make changes without notice.

