

Backdraft Damper • 4" Deep • "Tear Drop" Blades • Galvanized Steel • 180°F Max. Temperature**STANDARD CONSTRUCTION****FRAME:** 10 GA. galvanized steel.**BLADES:** 16 GA. galvanized steel.**BLADE SPACING:** 3 $\frac{3}{8}$ " minimum to 7 $\frac{1}{8}$ " maximum**LINKAGE:** 1/8" thick plated steel bracket with 1/2" dia. plated steel pivot riding in a celcon sleeve bearing. Linkage rod is 3/16" dia. aluminum locked to pivot with a 1/4"-20 UNC plated steel set screw. Single linkage for panels < 20"W. double linkage for panels > 20"W.**AXLES:** 3/4" dia. steel; Full length of blade.**BEARINGS:** Bronze Oilite.**SEALS:** Polyurethane on blade edges, none at jambs.**FINISH:** Mill.**OPTIONS**

Frames are available to completely contain blades and linkage

Flange or Channel frame (Airflow must be specified)

Jamb seals on blades and jambs to provide low leakage.

Stainless steel blade seal (.010" thick)

Counterweights (Assist or Resist must be specified)




Variety of bird and insect screens

NOTES

1. Nominal deductions will be made to the opening size given.

DAMPER SIZES

| Min Panel | Max Single Panel |
|-------------|------------------|
| 12"W x 12"H | 48"W x 72"H |

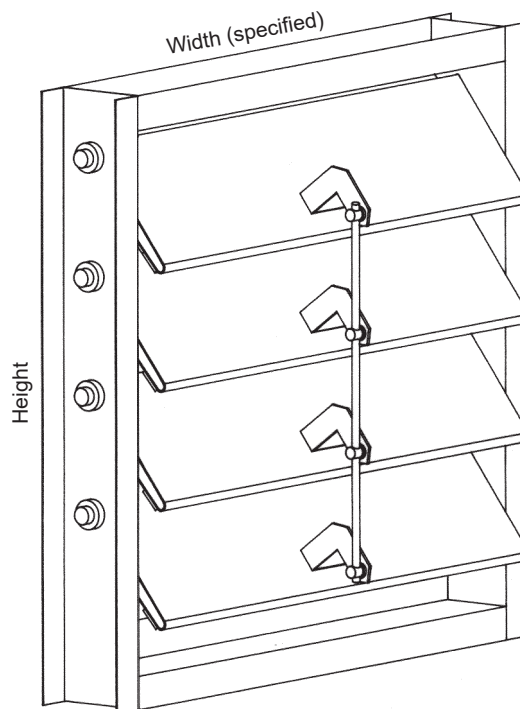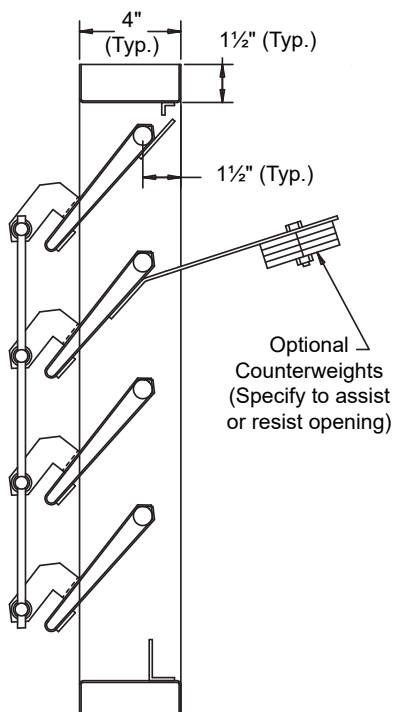

| | | | | | | | | | | | |
|---------------|-----|--------------|--------|-------------|--------|---------|-----------------|------|-------------------------|------|-------------------|
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| Item # | Qty | Width | Height | Width | Height | Mullion | Counter Balance | | Air Flow (Direction) | | <u>Union Made</u> |
| | | Opening Size | | Damper Size | | | | | | | |
| Arch. / Eng.: | | | | | | EDR: | | ECN: | | Job: | |
| Contractor: | | | | | | | | | | | |
| Project: | | | | | | Date: | | DWN: | | DWG: | |

In the interest of product development, Louvers & Dampers reserves the right to make changes without notice.

www.louvers-dampers.com

450 Riverside Drive • Wyalusing PA, 18853 • Phone 570-746-1888 • Fax 570-746-9286


Louvers **LD** Dampers
A Mestek Company

Backdraft Damper • 4" Deep • "Tear Drop" Blades • Galvanized Steel • 180°F Max. Temperature**PRESSURE DROP DATA**


Performance is based on AMCA Standard 500, Figure 5.4 (without ductwork) or Figure 5.3 (in-duct mount), operating temperatures below 180°F and a standard air density of 0.75 lb/ft³. Actual pressure drop performance will vary based on damper size and exact installation configuration. The curves shown below are furnished with counterweights to assist opening.

Velocity vs. Pressure Drop**Without Ductwork**

Operational Pressures
Start to Open .12 in. w.g.
Fully Open 3.37 in. w.g.

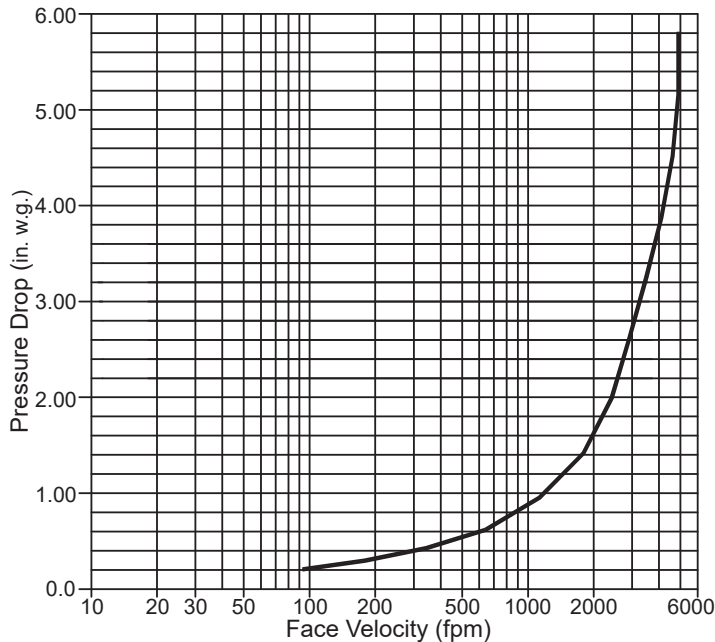**With Ductwork**

Operational Pressures
Start to Open .05 in. w.g.
Fully Open .70 in. w.g.

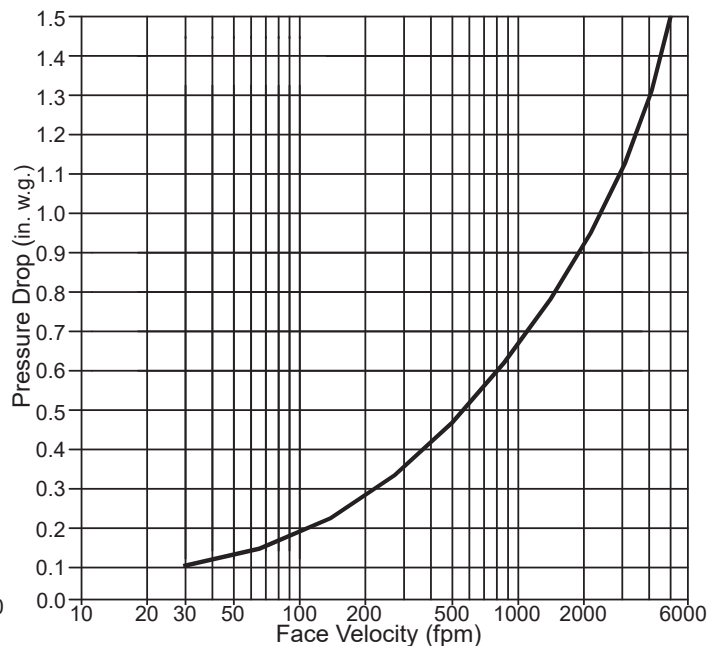

Typical performance for Model PRI4 backdraft damper size tested 42"W x 42"H furnished with counterweight to assist opening.

AIR LEAKAGE DATA

Air leakage quantities shown in the chart are results of tests per AMCA Standard 500 and are shown at 1 in. w.g. differential pressure and corrected to 0.75 lb/cu.ft. air density. For determining leakage values greater than 1 in. w.g. to a maximum 10 in. w.g. use the multiplier correction chart.

Total CFM Air Leakage at 1 in.w.g. Differential Through Closed Damper

| | | Width (in.) | | | | | | |
|--------------|-----|-------------|-----|-----|-----|-----|-----|-----|
| | | 12" | 18" | 24" | 30" | 36" | 42" | 48" |
| Height (in.) | 12" | 8 | 12 | 16 | 20 | 24 | 28 | 32 |
| | 24" | 16 | 24 | 32 | 40 | 48 | 56 | 64 |
| | 36" | 24 | 36 | 48 | 60 | 72 | 84 | 96 |
| | 48" | 32 | 48 | 64 | 80 | 96 | 112 | 128 |
| | 60" | 40 | 60 | 80 | 100 | 120 | 140 | 160 |
| | 72" | 48 | 72 | 96 | 120 | 144 | 168 | 192 |

For determining leakage values greater than 1 in. w.g. to a maximum 10 in. w.g. use the multiplier correction chart below.

| Static Pressure | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Multiplier Correction Factor | 1.3 | 1.5 | 1.8 | 2.0 | 2.3 | 2.5 | 2.8 | 3.0 | 3.3 |

Air leakage ratings are based on AMCA Standard 500 using test set up Fig. 5.4 with damper in the closed position without the aid of a counterweight or other mechanical means to provide closing torque, for a size 42"W x 42"H damper with blade and jamb seals.