

## Model SL73C

**Formed Steel Louver • 7" Deep • 35° Baffle Blades • Adjustable Drain Blades • Combination**

Page 1

## STANDARD CONSTRUCTION

**FRAME:** 16-GA. galvanized steel.

**BLADE:** Adjustable blade made from 16-GA. galvanized steel.  
Stationary blade made from 18-GA. galvanized steel.  
Blades approximately 3" on centers.

**LOUVER FACE:** Full head and sill with blades and jambs contained within.

**LINKAGE:** Brackets are 12-GA. Zinc plated machined steel. Pivots rotate in a Celcon bearing. A .312" dia. aluminum linkage rod is locked to the pivot by a ¼ - 20 set screw with an epoxy patch.

**SEALS:** Dual Durometer vinyl-grip seals at blade edge.  
Neoprene at jambs.

**SHAFTS:** 1/2" dia. plated steel stub.

**SCREEN:** (Secured to the exterior)

1/2" flattened aluminum (.051").

-or- 1/2" sq. mesh 19-GA. galvanized steel (.041"),

- or -  $^{18}/_{16}$  aluminum mesh insect screen (.011" dia.)

**FINISH:** Mill

## OPTIONS

### Finishes - Enamels, Epoxies, etc.

Other screens also available.

Actuators - Electric, Pneumatic, Manual, etc.

## NOTES


1. Nominal deductions will be made to the opening sizes given.
2. Approximate shipping weight is 9.0 lbs./sq.ft.

## LOUVER SIZES


Min Panel	Max Single Panel
12"W x 14"H	48"W x 96"H




Head




Jamb



Sill

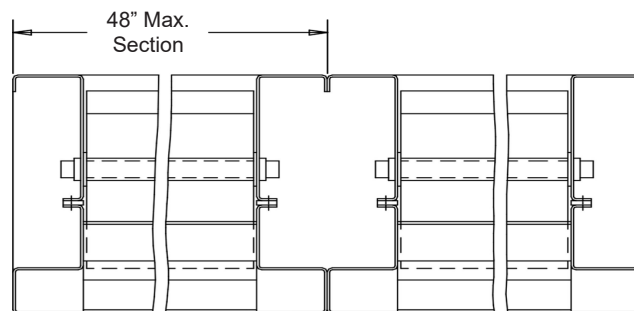

Not to scale.

											
Item #	Qty	Width	Height	Width	Height	Mullion	Type	Location			
		Opening Size		Louver Size			Screens				<u>Union Made</u>
Arch. / Eng. :						EDR:		ECN:		Job:	
Contractor:											
Project:						Date:		DWN:		DWG:	

In the interest of product development, Louvers & Dampers reserves the right to make changes without notice.