AIRLINE

GC6D35H

STANDARD MATERIALS AND CONSTRUCTION

FRAME: 16-GA. galvanized steel.

- **BLADE:** Adjustable blade made from 16-GA. galvanized steel. Stationary blade made from 18-GA. galvanized steel. Blades approximately 3" on centers.
- LOUVER FACE: Full head and sill with blades and jambs contained within.
 - LINKAGE: Brackets are 12-GA. Zinc plated machined steel. Pivots rotate in a Celcon bearing. A .312" dia. aluminum linkage rod is locked to the pivot by a ¼ 20 set screw with an epoxy patch.
 - SEALS: Dual Durometer vinyl-grip seals at blade edge. Neoprene at jambs.
 - SHAFTS: 1/2" dia. plated steel stub.
 - SCREEN: (Secured to the exterior)
 - 1/2" flattened aluminum (.051"),
 - -or- 1/2" sq. mesh 19-GA. galvanized steel (.041"),
 - -or- ¹⁸/₁₆ aluminum mesh insect screen (.011" dia.)
 - FINISH: Mill.

OPTIONS

Finishes - Enamels, Epoxies, etc.

Other screens also available.


Actuators - Electric, Pneumatic, Manual, etc.


NOTES

- 1. Nominal deductions will be made to the opening sizes given.
- 2. Approximate shipping weight is 9.0 lbs./sq.ft.

LOUVER SIZES

Min Panel	Max Single Panel				
12"W x 14"H	48"W x 96"H				

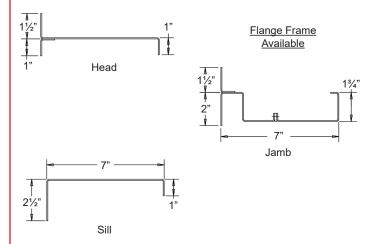


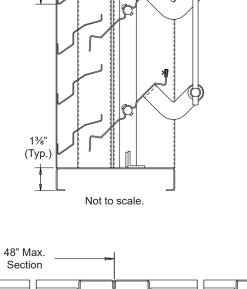

7"

(Typ.)

3"

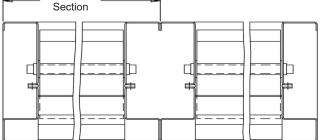

In the interest of product development, Airline Louvers reserves the right to make changes without notice.

											(R)
Item #	Qty	Width	Height	Width	Height	Mullion	Туре	Location			
		Openir	ng Size	Louver Size		Mullion	Screens				Union Made
Arch. / Eng. :						EDR:		ECN:		Job:	
Contractor:											
Project:						Date:		DWN:		DWG:	
1020 Prince Frederick Blvd. Suite 305 • Prince Frederick, MD 20687 • Phone: (570) 420-7079 • Fax: (570) 420-7078											