

SUBMITTAL DATA: EEH SERIES




SD-EEH-2
W30-WG1186-01

External Electric Heater

STANDARD FEATURES

- 2 to 20 Nominal kW Output
- Direct Mount to Horizontal Air Handlers
- Single or Dual Power Supply
- Internal Safeties
- Internal Staging Controls
- Simple Wiring
- Simple On/Off Light Indicator

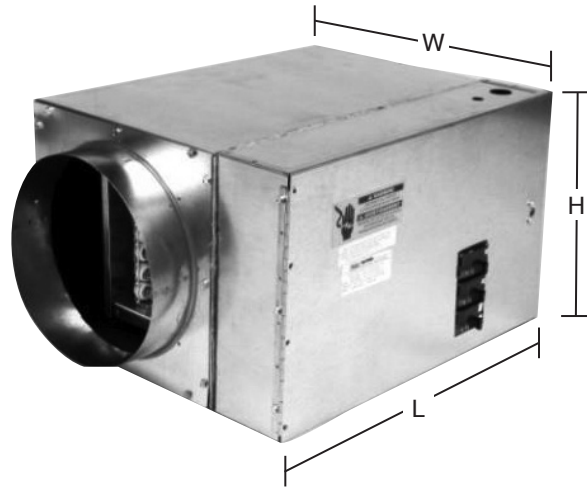

	Model	EEH-020	EEH-050	EEH-075	EEH-100	EEH-150	EEH-200
Performance	Nominal Output (kw)	2	5	7.5	10	15	20
	Nominal Output (BTU's)	6,830	17,076	25,614	34,152	51,228	68,304
	Min Airflow (CFM)*	100	200	300	500	600	800
Dimensions	L x W x H (inches) Incl Electrical Panel	26 x 19 x 10.5				28 x 19 x 10.5	
	Shipping (L x W x H inches)	29 x 23 x 13.25				31 x 23 x 13.25	
	Shipping Weight (lbs)	37		38		46	47
Electrical***	Power Supply (volts/ph/hz)	240/1/60					
	Control Volts (VDC)	24					
	Heater Amps (Ckt #1)**	8.3	20	30	40	20	40
	Heater Amps (Ckt #2)**	N/A				40	40
	Min Wire Gauge Dual (AWG)	N/A				#8 / #6	#6/#6
	Min Wire Gauge Single (AWG)	#10	#8	#6	#6	#4	#2
	Stages	1				2	
Air Handler Applicable	ESP/MCSP 2430 J (H & V)					NO	NO
	ESP/MCSP 3642 J (H & V)	YES	YES	YES	YES	YES	
	ESP/MCSP 4860 J (H & V)						

*Based upon 70°F entering air and discharge not to exceed 160°F

**@ 240VAC

***To achieve FLA value, air handler amp rating (found on data plate) needs to be added.



260 North Elm St., Westfield, MA 01085
(800) 465-8558

7555 Tranmere Drive, Mississauga, ONT. L5S 1L4 Canada
(905) 670-5888

www.spacepak.com

PROJECT: _____ DATE: _____

LOCATION: _____

CUSTOMER: _____

ENGINEER: _____

SUBMITTED BY: _____

FOR: Reference Approval Construction

UNIT DESIGNATION: _____

SCHEDULE NUMBER: _____