

TMC Direct Fired Gas Heating System


Technical Guide for:

Outdoor Mounted Units
To 100,000 CFM
And 14M BTUH

Temprite

Keeps You

Warm

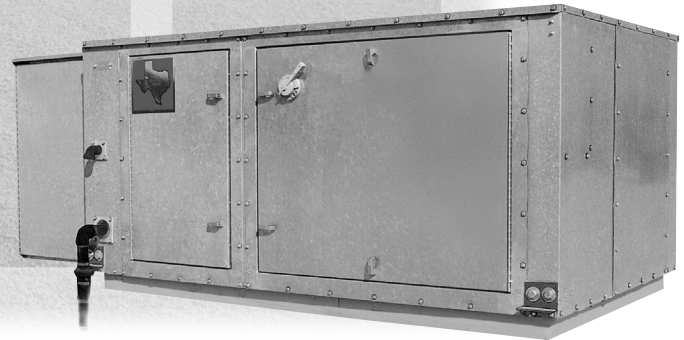

Featuring the Patented TracRite controlled Circulation System



: TMC Direct Fired : Gas Heating System : Technical Guide



In the business of commercial and industrial operations, efficient and low-cost heating is essential. Temprite keeps you warm for less.

Since 1963, Temprite has been providing cost-effective, reliable gas heating solutions. Our proven Direct Fired Gas Heating System adds warm, fresh and clean air to your work environment for greater comfort and productivity.

This Technical Guide will help you choose a Temprite Direct Fired Gas Heating System to provide efficient, cost-effective heating for your kitchen, warehouse, factory or process operation. The Guide covers:

- Technical Specifications — Configure the right system components (e.g., burner, motors, drive, filter, options, etc.) to meet your needs.
- Installation Information — Plan details of on-site installation with dimensional information, unit weights and cabinet arrangement diagrams.

If you have questions, please contact Temprite's Customer Service Department at 214-638-6010. We'll be glad to help.

Temprite

Keeps You

Warm

In the interest of product improvement, Temprite reserves the right to make changes without notice.

: Table of Contents



| | |
|--|-------|
| Air Delivery Tables | 4-5 |
| Burner Performance Tables | 6-7 |
| Dimensions | |
| Standard Horizontal Units | 8-10 |
| Roof Curbs | |
| 100% Make-Up Air | 11 |
| Return Air After Burner | 12 |
| Return Air Before Burner | 13 |
| Standard Vertical Units | 14-19 |
| V-Bank Filter | 20 |
| Mixing Box and Airflow Station | 20 |
| Inlet Dampers | 21 |
| Discharge Dampers | 21 |
| Discharge Louvers | 21 |
| Intake Hoods | 22 |
| Cooling Coil Section | 23 |
| 5F and 5R Discharge..... | 24-25 |
| 8F and 8R Discharge..... | 26-27 |
| 5F and 5R Discharge Pressure Drop and Coverage .. | 28-29 |
| 8F and 8R Discharge Pressure Drop and Coverage .. | 30-31 |
| Cooling Coil Performance..... | 32-39 |
| Control Systems | 40-43 |
| Amp Draw Table | 44 |
| Sequence of Operation – Return Air Unit | 44 |
| Typical Gas Piping Layout..... | 45 |
| Unit Weights | 46 |
| Cabinet Arrangements | 47 |
| Guide Specification – Base Unit..... | 48-49 |
| Guide Specification – Mixing Dampers with Return | |
| Air Flow Station | 50 |
| Guide Specification – Touchscreen Controller | 51 |

Air Delivery Table

| Single Blower Models | | | | | | | | | | |
|----------------------|--------|---------------------|---------------------------------------|---------|---------|---------|-------|-----------|-----------|-------|
| Unit Model | SCFM | FPM Outlet Velocity | Total External Static Pressure (W.C.) | | | | | | | |
| | | | 1/4" HP | 3/8" HP | 1/2" HP | 3/4" HP | 1" HP | 1-1/4" HP | 1-1/2" HP | 2" HP |
| 109 | 1600 | 1915 | 1 | 1 | 1 | 1 | — | — | — | — |
| | 1800 | 2155 | 1 | 1 | 1 | 1-1/2 | 1-1/2 | 1-1/2 | — | — |
| | 2000 | 2390 | 1-1/2 | 1-1/2 | 1-1/2 | 1-1/2 | 1-1/2 | 2 | 2 | — |
| | 2250 | 2690 | 1-1/2 | 1-1/2 | 1-1/2 | 2 | 2 | 2 | 2 | 3 |
| | 2500 | 2990 | 2 | 2 | 2 | 2 | 2 | 3 | 3 | 3 |
| | 2750 | 3290 | 2 | 2 | 2 | 3 | 3 | 3 | 3 | 3 |
| | 3000 | 3590 | 3 | 3 | 3 | 3 | 3 | 3 | 5 | 5 |
| 112 | 3250 | 2255 | 1-1/2 | 2 | 2 | 2 | 3 | 3 | 3 | 3 |
| | 3500 | 2430 | 2 | 2 | 2 | 3 | 3 | 3 | 3 | 5 |
| | 3750 | 2605 | 2 | 2 | 3 | 3 | 3 | 3 | 3 | 5 |
| | 4000 | 2775 | 3 | 3 | 3 | 3 | 3 | 3 | 5 | 5 |
| | 4250 | 2950 | 3 | 3 | 3 | 3 | 3 | 5 | 5 | 5 |
| 115 | 4500 | 2240 | 2 | 2 | 3 | 3 | 3 | 3 | 5 | — |
| | 5000 | 2485 | 3 | 3 | 3 | 3 | 3 | 5 | 5 | 5 |
| | 5500 | 2735 | 3 | 3 | 3 | 5 | 5 | 5 | 5 | 5 |
| | 6000 | 2985 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 7-1/2 |
| 118 | 6500 | 2265 | 3 | 5 | 5 | 5 | 5 | 5 | 5 | 7-1/2 |
| | 7000 | 2440 | 5 | 5 | 5 | 5 | 5 | 5 | 7-1/2 | 7-1/2 |
| | 7500 | 2615 | 5 | 5 | 5 | 5 | 5 | 7-1/2 | 7-1/2 | 7-1/2 |
| | 8000 | 2785 | 5 | 5 | 5 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 |
| | 8500 | 2960 | 5 | 5 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 | 10 |
| 120 | 9000 | 2145 | 5 | 5 | 5 | 5 | 7-1/2 | 7-1/2 | 7-1/2 | — |
| | 9500 | 2260 | 5 | 5 | 5 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 | — |
| | 10,000 | 2380 | 5 | 5 | 5 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 | 10 |
| | 10,500 | 2500 | 5 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 | 10 | 10 |
| | 11,000 | 2620 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 | 10 | 10 | 10 |
| 122 | 11,000 | 2155 | 5 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 | 10 | — |
| | 12,000 | 2355 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 | 10 | 10 | 15 |
| | 13,000 | 2550 | 7-1/2 | 7-1/2 | 7-1/2 | 10 | 10 | 10 | 10 | 15 |
| | 14,000 | 2745 | 7-1/2 | 10 | 10 | 10 | 10 | 15 | 15 | 15 |
| | 15,000 | 2940 | 10 | 10 | 10 | 10 | 15 | 15 | 15 | 15 |
| 125 | 14,000 | 2085 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 | 10 | — | — | — |
| | 15,000 | 2235 | 7-1/2 | 7-1/2 | 7-1/2 | 10 | 10 | 10 | 15 | — |
| | 16,000 | 2385 | 7-1/2 | 7-1/2 | 7-1/2 | 10 | 10 | 10 | 15 | — |
| | 18,000 | 2685 | 10 | 10 | 10 | 10 | 15 | 15 | 15 | 15 |
| | 20,000 | 2980 | 10 | 15 | 15 | 15 | 15 | 15 | 20 | 20 |
| 130 | 22,000 | 2365 | 10 | 10 | 10 | 15 | 15 | 15 | 15 | — |
| | 24,000 | 2580 | 10 | 15 | 15 | 15 | 15 | 15 | 20 | 20 |
| | 26,000 | 2795 | 15 | 15 | 15 | 15 | 20 | 20 | 20 | 25 |
| | 28,000 | 3010 | 15 | 15 | 15 | 20 | 20 | 20 | 20 | 25 |
| | 30,000 | 3225 | 20 | 20 | 20 | 20 | 20 | 25 | 25 | 30 |

NOTE:

Horsepower selections are based on system external static pressure. One or more of the following must be added when applicable.

- | | | | |
|--------------------------------------|-----------|------------------------|-----------|
| A. Fresh Air Inlet Hood & Birdscreen | .13" W.C. | G. 5F and 5R Discharge | pg 28, 29 |
| B. Fresh Air Inlet Hood with Filters | .25" W.C. | H. 8F and 8R Discharge | pg 30, 31 |
| C. Motor Operated Inlet Damper | .13" W.C. | I. 4 Row DX Coils | pg 32, 33 |
| D. Motor Operated Discharge Damper | .50" W.C. | J. 6 Row DX Coils | pg 34, 35 |
| E. V-Bank Filter Section | .25" W.C. | K. 4 Row CW Coils | pg 36, 37 |
| F. Discharge Louver | .13" W.C. | L. 6 Row CW Coils | pg 38, 39 |

SELECTION GUIDE

1. Determine the required amount of replacement air (CFM) by computing the total amount of air being exhausted. (Restaurants should be sized for 90% of exhaust air to minimize food odors.)
2. Determine the total external static pressure by adding the pressure drops through all accessories and ducts.
3. Select unit size and motor horsepower from table.

Air Delivery Table

| Twin Blower Models | | | | | | | | | | |
|--------------------|---------|---------------------|---------------------------------------|---------|---------|---------|-------|-----------|-----------|-------|
| Unit Model | SCFM | FPM Outlet Velocity | Total External Static Pressure (W.C.) | | | | | | | |
| | | | 1/4" HP | 3/8" HP | 1/2" HP | 3/4" HP | 1" HP | 1-1/4" HP | 1-1/2" HP | 2" HP |
| 215 | 9000 | 2240 | 5 | 5 | 5 | 5 | 7-1/2 | — | — | — |
| | 9500 | 2365 | 5 | 5 | 5 | 5 | 7-1/2 | 7-1/2 | — | — |
| | 10,000 | 2485 | 5 | 5 | 5 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 | — |
| | 10,500 | 2610 | 5 | 5 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 | — |
| | 11,000 | 2735 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 | 10 | 10 |
| | 11,500 | 2860 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 | 10 | 10 | 10 |
| | 12,000 | 2985 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 | 10 | 10 | 10 | 15 |
| 218 | 12,500 | 2175 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 | — | — | — |
| | 13,000 | 2265 | 7-1/2 | 7-1/2 | 7-1/2 | 7-1/2 | 10 | 10 | — | — |
| | 14,000 | 2440 | 7-1/2 | 7-1/2 | 7-1/2 | 10 | 10 | 10 | 15 | — |
| | 15,000 | 2615 | 7-1/2 | 10 | 10 | 10 | 10 | 15 | 15 | 15 |
| | 16,000 | 2785 | 10 | 10 | 10 | 10 | 15 | 15 | 15 | 15 |
| | 17,000 | 2960 | 10 | 10 | 10 | 15 | 15 | 15 | 15 | 20 |
| 220 | 18,000 | 2140 | 7-1/2 | 10 | 10 | 10 | 15 | 15 | 15 | — |
| | 19,000 | 2260 | 10 | 10 | 10 | 10 | 15 | 15 | 15 | — |
| | 20,000 | 2380 | 10 | 10 | 10 | 15 | 15 | 15 | 15 | 20 |
| | 21,000 | 2500 | 10 | 15 | 15 | 15 | 15 | 15 | 20 | 20 |
| | 22,000 | 2620 | 15 | 15 | 15 | 15 | 15 | 20 | 20 | 20 |
| | 23,000 | 2740 | 15 | 15 | 15 | 15 | 15 | 20 | 20 | 20 |
| | 24,000 | 2860 | 15 | 15 | 15 | 15 | 20 | 20 | 20 | 25 |
| | 25,000 | 2980 | 15 | 15 | 15 | 20 | 20 | 20 | 20 | 25 |
| | 26,000 | 3100 | 15 | 20 | 20 | 20 | 20 | 20 | 25 | 25 |
| 222 | 25,000 | 2450 | 15 | 15 | 15 | 15 | 20 | 20 | 20 | 25 |
| | 26,000 | 2550 | 15 | 15 | 15 | 20 | 20 | 20 | 20 | 25 |
| | 27,000 | 2650 | 15 | 15 | 15 | 20 | 20 | 20 | 25 | 25 |
| | 28,000 | 2750 | 15 | 20 | 20 | 20 | 20 | 25 | 25 | 30 |
| | 29,000 | 2850 | 20 | 20 | 20 | 20 | 25 | 25 | 25 | 30 |
| | 30,000 | 2950 | 20 | 20 | 20 | 20 | 25 | 25 | 25 | 30 |
| | 31,000 | 3040 | 20 | 20 | 20 | 25 | 25 | 25 | 30 | 30 |
| 225 | 30,000 | 2235 | 15 | 15 | 15 | 15 | 20 | 20 | — | — |
| | 32,000 | 2385 | 15 | 15 | 15 | 20 | 20 | 20 | 25 | — |
| | 34,000 | 2535 | 15 | 20 | 20 | 20 | 20 | 25 | 25 | 30 |
| | 36,000 | 2685 | 20 | 20 | 20 | 20 | 25 | 25 | 30 | 30 |
| | 38,000 | 2835 | 20 | 20 | 20 | 25 | 25 | 30 | 30 | 40 |
| | 40,000 | 2980 | 20 | 25 | 25 | 25 | 30 | 30 | 30 | 40 |
| | 42,000 | 3130 | 25 | 25 | 25 | 30 | 30 | 40 | 40 | 40 |
| | 44,000 | 3280 | 25 | 30 | 30 | 30 | 40 | 40 | 40 | 40 |
| | 46,000 | 3430 | 30 | 30 | 30 | 40 | 40 | 40 | 40 | 50 |
| 230 | 44,000 | 2365 | 20 | 20 | 20 | 25 | 25 | 30 | — | — |
| | 48,000 | 2580 | 20 | 25 | 25 | 25 | 30 | 30 | 40 | — |
| | 52,000 | 2800 | 25 | 25 | 30 | 30 | 40 | 40 | 40 | 50 |
| | 56,000 | 3010 | 30 | 30 | 30 | 40 | 40 | 40 | 40 | 50 |
| | 60,000 | 3225 | 40 | 40 | 40 | 40 | 40 | 50 | 50 | 50 |
| | 64,000 | 3440 | 40 | 40 | 40 | 50 | 50 | 50 | 50 | 60 |
| 233 | 60,000 | 2490 | 30 | 30 | 30 | 40 | 40 | 40 | 50 | — |
| | 65,000 | 2695 | 40 | 40 | 40 | 40 | 40 | 50 | 50 | 60 |
| | 70,000 | 2905 | 40 | 40 | 40 | 50 | 50 | 50 | 60 | 60 |
| | 75,000 | 3110 | 50 | 50 | 50 | 50 | 60 | 60 | 60 | 75 |
| 240 | 70,000 | 2305 | 30 | 30 | 40 | 40 | 40 | 50 | 50 | 60 |
| | 75,000 | 2470 | 40 | 40 | 40 | 40 | 50 | 50 | 60 | 60 |
| | 80,000 | 2635 | 40 | 40 | 40 | 50 | 50 | 60 | 60 | 75 |
| | 85,000 | 2795 | 40 | 50 | 50 | 50 | 60 | 60 | 60 | 75 |
| | 90,000 | 2960 | 50 | 50 | 50 | 60 | 60 | 60 | 75 | 75 |
| | 95,000 | 3125 | 50 | 60 | 60 | 60 | 75 | 75 | 75 | 100 |
| | 100,000 | 3290 | 60 | 60 | 60 | 75 | 75 | 75 | 100 | 100 |

Burner Performance Table

| Single Blower Models — MBH Input | | | | | | | | |
|----------------------------------|--------|----------|----------|----------|-----------|-----------|-----------|-----------|
| Unit Model | SCFM | 70° Rise | 80° Rise | 90° Rise | 100° Rise | 110° Rise | 120° Rise | 130° Rise |
| 109 | 1600 | 142 | 159 | 175 | 191 | 206 | 221 | 235 |
| | 1800 | 160 | 179 | 197 | 215 | 232 | 248 | 264 |
| | 2000 | 177 | 199 | 219 | 239 | 258 | 276 | 294 |
| | 2250 | 200 | 224 | 247 | 269 | 290 | 311 | 330 |
| | 2500 | 222 | 248 | 274 | 299 | 322 | 345 | 367 |
| | 2750 | 244 | 273 | 301 | 328 | 354 | 380 | 404 |
| | 3000 | 266 | 298 | 329 | 358 | 387 | 414 | 440 |
| 112 | 3250 | 288 | 323 | 356 | 388 | 419 | 449 | 477 |
| | 3500 | 311 | 348 | 384 | 418 | 451 | 483 | 514 |
| | 3750 | 333 | 373 | 411 | 448 | 483 | 518 | 550 |
| | 4000 | 355 | 397 | 438 | 478 | 516 | 552 | 587 |
| | 4250 | 377 | 422 | 466 | 508 | 548 | 587 | 624 |
| 115 | 4500 | 399 | 447 | 493 | 537 | 580 | 621 | 661 |
| | 5000 | 444 | 497 | 548 | 597 | 644 | 690 | 734 |
| | 5500 | 488 | 546 | 603 | 657 | 709 | 759 | 807 |
| | 6000 | 533 | 596 | 658 | 717 | 773 | 828 | 881 |
| 118 | 6500 | 577 | 646 | 712 | 776 | 838 | 897 | 954 |
| | 7000 | 621 | 696 | 767 | 836 | 902 | 966 | 1027 |
| | 7500 | 665 | 745 | 822 | 896 | 967 | 1035 | 1101 |
| | 8000 | 710 | 795 | 877 | 955 | 1031 | 1104 | 1174 |
| | 8500 | 754 | 845 | 932 | 1015 | 1096 | 1173 | 1248 |
| 120 | 9000 | 798 | 894 | 986 | 1075 | 1160 | 1242 | 1321 |
| | 9500 | 843 | 944 | 1041 | 1135 | 1224 | 1311 | 1394 |
| | 10,000 | 887 | 994 | 1096 | 1194 | 1289 | 1380 | 1468 |
| | 10,500 | 932 | 1043 | 1151 | 1254 | 1353 | 1449 | 1541 |
| | 11,000 | 976 | 1093 | 1205 | 1314 | 1418 | 1518 | 1615 |
| 122 | 11,000 | 976 | 1093 | 1205 | 1314 | 1418 | 1518 | 1615 |
| | 12,000 | 1065 | 1192 | 1315 | 1433 | 1547 | 1656 | 1761 |
| | 13,000 | 1153 | 1292 | 1425 | 1553 | 1676 | 1794 | 1908 |
| | 14,000 | 1242 | 1391 | 1534 | 1672 | 1804 | 1932 | 2055 |
| | 15,000 | 1331 | 1490 | 1644 | 1791 | 1933 | 2070 | 2202 |
| 125 | 14,000 | 1242 | 1391 | 1534 | 1672 | 1804 | 1932 | 2055 |
| | 15,000 | 1331 | 1490 | 1644 | 1791 | 1933 | 2070 | 2202 |
| | 16,000 | 1419 | 1590 | 1753 | 1911 | 2062 | 2208 | 2349 |
| | 18,000 | 1597 | 1788 | 1973 | 2150 | 2320 | 2484 | 2642 |
| | 20,000 | 1774 | 1987 | 2192 | 2388 | 2578 | 2760 | 2936 |
| 130 | 22,000 | 1952 | 2186 | 2411 | 2627 | 2836 | 3036 | 3229 |
| | 24,000 | 2129 | 2385 | 2630 | 2866 | 3093 | 3312 | 3523 |
| | 26,000 | 2307 | 2583 | 2849 | 3105 | 3351 | 3588 | 3816 |
| | 28,000 | 2484 | 2782 | 3069 | 3344 | 3609 | 3864 | 4110 |
| | 30,000 | 2661 | 2981 | 3288 | 3583 | 3867 | 4140 | 4404 |

SELECTION GUIDE

1. Determine the temperature rise required through the heater by subtracting the winter design temperature from the desired indoor temperature.
2. Values shown in above MBH Input Tables are based on -40° F Inlet Temperature. MBH input shown on unit rating plate will be corrected for actual air density.
3. Natural gas units are limited to 130° F temperature rise, propane units are limited to 100° F temperature rise.

Burner Performance Table

| Twin Blower Models — MBH Input | | | | | | | | |
|--------------------------------|---------|----------|----------|----------|-----------|-----------|-----------|-----------|
| Unit Model | SCFM | 70° Rise | 80° Rise | 90° Rise | 100° Rise | 110° Rise | 120° Rise | 130° Rise |
| 215 | 9000 | 798 | 894 | 986 | 1075 | 1160 | 1242 | 1321 |
| | 9500 | 843 | 944 | 1041 | 1135 | 1224 | 1311 | 1394 |
| | 10,000 | 887 | 994 | 1096 | 1194 | 1289 | 1380 | 1468 |
| | 10,500 | 932 | 1043 | 1151 | 1254 | 1353 | 1449 | 1541 |
| | 11,000 | 976 | 1093 | 1205 | 1314 | 1418 | 1518 | 1615 |
| | 11,500 | 1020 | 1143 | 1260 | 1373 | 1482 | 1587 | 1688 |
| | 12,000 | 1065 | 1192 | 1315 | 1433 | 1547 | 1656 | 1761 |
| 218 | 12,500 | 1109 | 1242 | 1370 | 1493 | 1611 | 1725 | 1835 |
| | 13,000 | 1153 | 1292 | 1425 | 1553 | 1676 | 1794 | 1908 |
| | 14,000 | 1242 | 1391 | 1534 | 1672 | 1804 | 1932 | 2055 |
| | 15,000 | 1331 | 1490 | 1644 | 1791 | 1933 | 2070 | 2202 |
| | 16,000 | 1419 | 1590 | 1753 | 1911 | 2062 | 2208 | 2349 |
| | 17,000 | 1508 | 1689 | 1863 | 2030 | 2191 | 2346 | 2495 |
| 220 | 18,000 | 1597 | 1788 | 1973 | 2150 | 2320 | 2484 | 2642 |
| | 19,000 | 1686 | 1888 | 2082 | 2269 | 2449 | 2622 | 2789 |
| | 20,000 | 1774 | 1987 | 2192 | 2388 | 2578 | 2760 | 2936 |
| | 21,000 | 1863 | 2087 | 2301 | 2508 | 2707 | 2898 | 3082 |
| | 22,000 | 1952 | 2186 | 2411 | 2627 | 2836 | 3036 | 3229 |
| | 23,000 | 2040 | 2285 | 2521 | 2747 | 2964 | 3174 | 3376 |
| | 24,000 | 2129 | 2385 | 2630 | 2866 | 3093 | 3312 | 3523 |
| | 25,000 | 2218 | 2484 | 2740 | 2986 | 3222 | 3450 | 3670 |
| | 26,000 | 2307 | 2583 | 2849 | 3105 | 3351 | 3588 | 3816 |
| 222 | 25,000 | 2218 | 2484 | 2740 | 2986 | 3222 | 3450 | 3670 |
| | 26,000 | 2307 | 2583 | 2849 | 3105 | 3351 | 3588 | 3816 |
| | 27,000 | 2395 | 2683 | 2959 | 3224 | 3480 | 3726 | 3963 |
| | 28,000 | 2484 | 2782 | 3069 | 3344 | 3609 | 3864 | 4110 |
| | 29,000 | 2573 | 2881 | 3178 | 3463 | 3738 | 4002 | 4257 |
| | 30,000 | 2661 | 2981 | 3288 | 3583 | 3867 | 4140 | 4404 |
| | 31,000 | 2750 | 3080 | 3397 | 3702 | 3996 | 4278 | 4550 |
| 225 | 30,000 | 2661 | 2981 | 3288 | 3583 | 3867 | 4140 | 4404 |
| | 32,000 | 2839 | 3180 | 3507 | 3822 | 4124 | 4416 | 4697 |
| | 34,000 | 3016 | 3378 | 3726 | 4060 | 4382 | 4692 | 4991 |
| | 36,000 | 3194 | 3577 | 3945 | 4299 | 4640 | 4968 | 5284 |
| | 38,000 | 3371 | 3776 | 4164 | 4538 | 4898 | 5244 | 5578 |
| | 40,000 | 3549 | 3974 | 4384 | 4777 | 5156 | 5520 | 5871 |
| | 42,000 | 3726 | 4173 | 4603 | 5016 | 5413 | 5796 | 6165 |
| | 44,000 | 3903 | 4372 | 4822 | 5255 | 5671 | 6072 | 6458 |
| 46,000 | 4081 | 4571 | 5041 | 5494 | 5929 | 6348 | 6752 | |
| 230 | 44,000 | 3903 | 4372 | 4822 | 5255 | 5671 | 6072 | 6458 |
| | 48,000 | 4258 | 4769 | 5260 | 5732 | 6187 | 6624 | 7046 |
| | 52,000 | 4613 | 5167 | 5699 | 6210 | 6702 | 7176 | 7633 |
| | 56,000 | 4968 | 5564 | 6137 | 6688 | 7218 | 7728 | 8220 |
| | 60,000 | 5323 | 5962 | 6575 | 7165 | 7733 | 8280 | 8807 |
| | 64,000 | 5678 | 6359 | 7014 | 7643 | 8249 | 8832 | 9394 |
| 233 | 60,000 | 5323 | 5962 | 6575 | 7165 | 7733 | 8280 | 8807 |
| | 65,000 | 5766 | 6458 | 7123 | 7763 | 8378 | 8970 | 9541 |
| | 70,000 | 6210 | 6955 | 7671 | 8360 | 9022 | 9660 | 10,275 |
| | 75,000 | 6654 | 7452 | 8219 | 8957 | 9667 | 10,350 | 11,009 |
| 240 | 70,000 | 6210 | 6955 | 7671 | 8360 | 9022 | 9660 | 10,275 |
| | 75,000 | 6654 | 7452 | 8219 | 8957 | 9667 | 10,350 | 11,009 |
| | 80,000 | 7097 | 7949 | 8767 | 9554 | 10,311 | 11,040 | 12,743 |
| | 85,000 | 7541 | 8446 | 9315 | 10,151 | 10,955 | 11,730 | 12,477 |
| | 90,000 | 7984 | 8942 | 9863 | 10,784 | 11,600 | 12,420 | 13,211 |
| | 95,000 | 8428 | 9439 | 10,411 | 11,345 | 12,244 | 13,110 | 13,944 |
| | 100,000 | 8872 | 9936 | 10,959 | 11,942 | 12,889 | 13,800 | 14,678 |


Dimensions

Single Blower Models — Sizes 109 Through 130

C000465A

UNIT COMPONENTS

- | | | | |
|---------------------------|---------------------------------------|-------------------------------------|---|
| 1. Centrifugal supply fan | 4. Control cabinet | 7. Access door | 10. Unit base |
| 2. Fan motor | 5. Hinged control cabinet access door | 8. Access door (piping compartment) | 11. Manifold compartment |
| 3. Line burner | 6. Observation port | 9. Lifting lug | 12. Return air flow station (required for ETL listed Return Air Unit) |

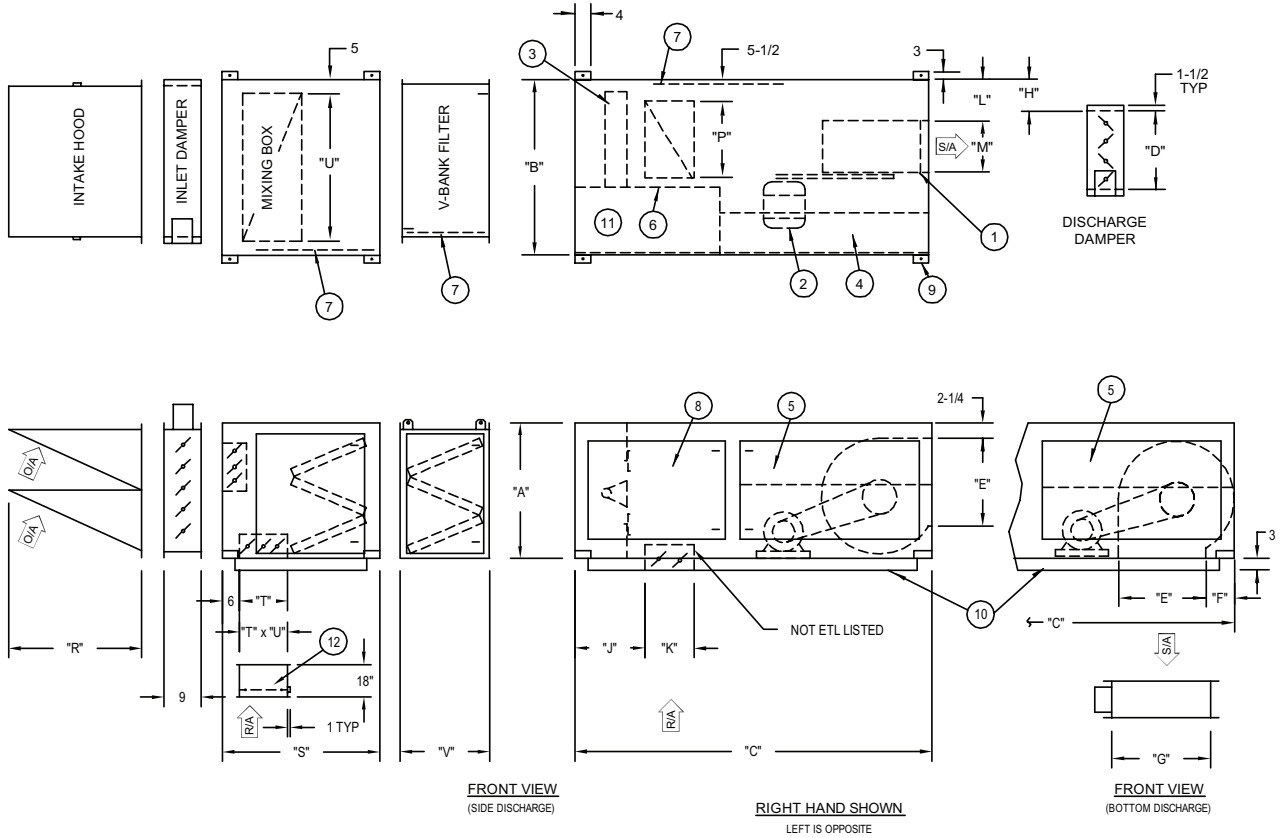

| Model | Dimensions | | | | | | | | | |
|-------|------------|----|----|----------------------------------|---------------------------------|---------------------------------|---------------------------------|----------------------------------|---------------------------------|--|
| | A | B | C | D | E | F | G | H | J | |
| 109 | 36 | 52 | 77 | 17 ¹³ / ₁₆ | 10 ³ / ₈ | 15 ¹ / ₈ | 14 ⁷ / ₁₆ | 11 ¹ / ₁₆ | 19 | |
| 112 | 36 | 52 | 77 | 17 ¹³ / ₁₆ | 13 ³ / ₁₆ | 13 ³ / ₁₆ | 14 ⁷ / ₁₆ | 11 ¹ / ₁₆ | 19 | |
| 115 | 36 | 52 | 77 | 23 ¹⁵ / ₁₆ | 16 | 12 ³ / ₈ | 19 ⁷ / ₈ | 8 ⁵ / ₈ | 19 | |
| 118 | 36 | 52 | 77 | 23 ¹⁵ / ₁₆ | 19 | 12 ³ / ₈ | 19 ⁷ / ₈ | 6 ¹⁵ / ₁₆ | 19 | |
| 120 | 48 | 78 | 96 | 29 ¹ / ₂ | 24 ⁷ / ₈ | 13 ³ / ₁₆ | 28 ¹ / ₄ | 10 ³ / ₃₂ | 19 | |
| 122 | 48 | 78 | 96 | 29 ¹ / ₂ | 27 ³ / ₈ | 13 ³ / ₁₆ | 28 ¹ / ₄ | 11 ¹³ / ₃₂ | 19 | |
| 125 | 60 | 91 | 96 | 38 ⁷ / ₈ | 31 ³ / ₈ | 17 ⁷ / ₁₆ | 37 ³ / ₄ | 11 ¹¹ / ₁₆ | 12 ³ / ₁₆ | |
| 130 | 60 | 91 | 96 | 38 ⁷ / ₈ | 36 ⁷ / ₈ | 17 ⁷ / ₁₆ | 37 ³ / ₄ | 14 ⁷ / ₁₆ | 12 ³ / ₁₆ | |

| Model | Dimensions | | | | | | | | | |
|-------|--------------------------------|--------------------------------|----------------------------------|--------------------------------|--------------------------------|----|--------------------------------|----|----|--|
| | K | L | M | P | R | S | T | U | V | |
| 109 | 14 ¹ / ₄ | 14 ¹ / ₂ | 11 ¹⁵ / ₁₆ | 27 ³ / ₄ | 32 | 54 | 20 ¹ / ₄ | 42 | 22 | |
| 112 | 14 ¹ / ₄ | 12 ¹ / ₂ | 15 ¹⁵ / ₁₆ | 27 ³ / ₄ | 32 | 54 | 20 ¹ / ₄ | 42 | 22 | |
| 115 | 14 ¹ / ₄ | 11 ⁷ / ₈ | 18 ¹⁵ / ₁₆ | 27 ³ / ₄ | 32 | 54 | 20 ¹ / ₄ | 42 | 22 | |
| 118 | 14 ¹ / ₄ | 7 ¹ / ₈ | 22 ¹ / ₁₆ | 27 ³ / ₄ | 32 | 54 | 20 ¹ / ₄ | 42 | 22 | |
| 120 | 14 ¹ / ₄ | 12 ³ / ₈ | 25 ¹ / ₁₆ | 48 | 38 ¹ / ₂ | 60 | 20 ¹ / ₄ | 68 | 22 | |
| 122 | 14 ¹ / ₄ | 12 ³ / ₈ | 27 ⁹ / ₁₆ | 48 | 38 ¹ / ₂ | 60 | 20 ¹ / ₄ | 68 | 22 | |
| 125 | 20 ¹ / ₄ | 15 ³ / ₈ | 31 ¹ / ₂ | 49 | 53 | 65 | 26 ¹ / ₂ | 81 | 28 | |
| 130 | 20 ¹ / ₄ | 15 ³ / ₈ | 37 | 49 | 53 | 65 | 26 ¹ / ₂ | 81 | 28 | |

NOTE: All dimensions in inches subject to manufacturing tolerances.


Dimensions

Twin Blower Models — Sizes 215 Through 230

C000466A

UNIT COMPONENTS

- | | | | |
|---------------------------|---------------------------------------|-------------------------------------|---|
| 1. Centrifugal supply fan | 4. Control cabinet | 7. Access door | 10. Unit base |
| 2. Fan motor | 5. Hinged control cabinet access door | 8. Access door (piping compartment) | 11. Manifold compartment |
| 3. Line burner | 6. Observation port | 9. Lifting lug | 12. Return air flow station (required for ETL listed Return Air Unit) |

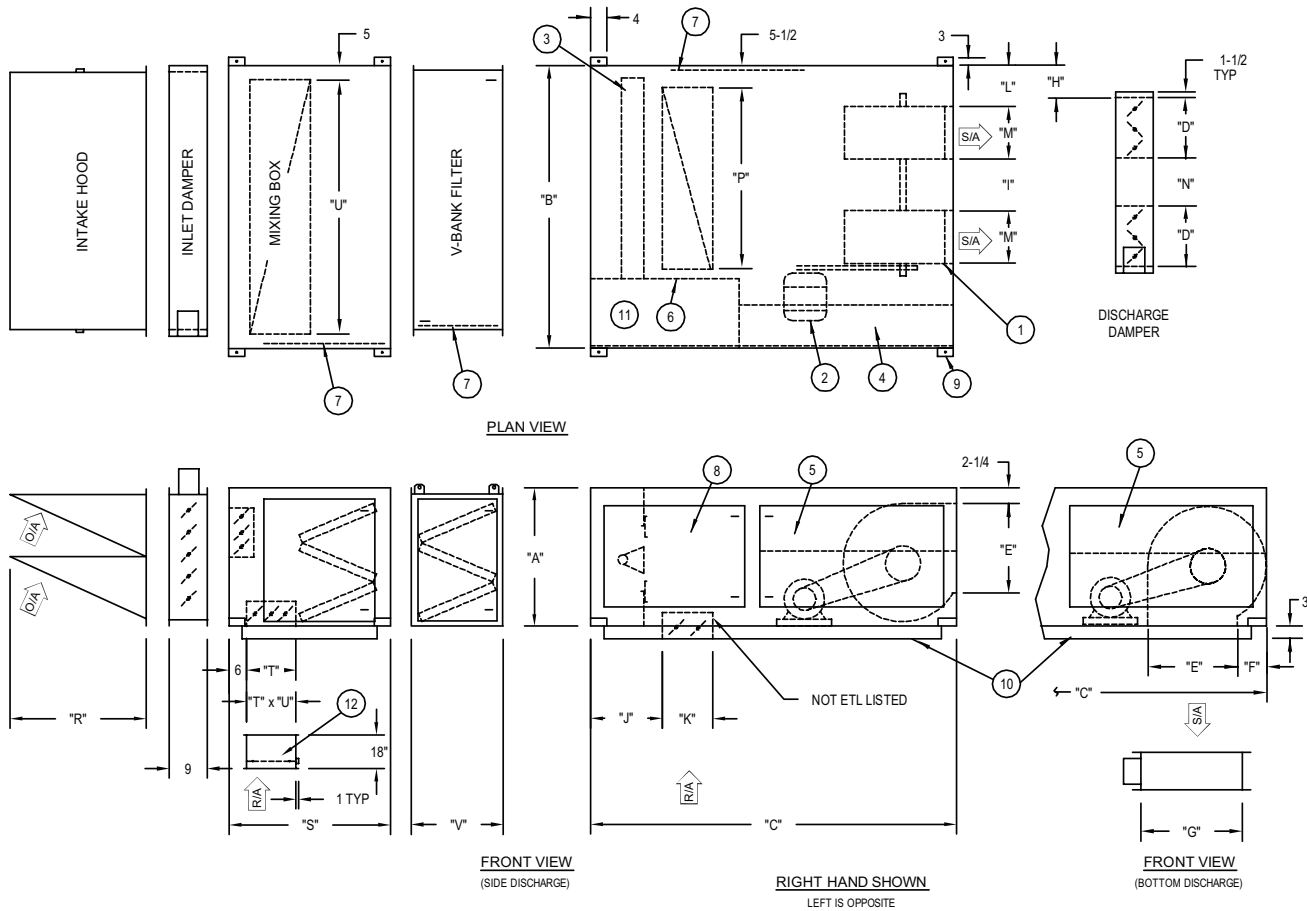

| Model | Dimensions | | | | | | | | | |
|-------|--------------------------------|--------------------------------|----------------------------------|----------------------------------|---------------------------------|---------------------------------|--------------------------------|---------------------------------|--------------------------------|---------------------------------|
| | A | B | C | D | E | F | G | H | I | J |
| 215 | 36 | 94 | 77 | 23 ¹⁵ / ₁₆ | 16 | 12 ³ / ₈ | 19 ⁷ / ₈ | 6 ¹⁵ / ₁₆ | 22 ¹ / ₄ | 19 |
| 218 | 36 | 94 | 77 | 23 ¹⁵ / ₁₆ | 19 | 12 ³ / ₈ | 19 ⁷ / ₈ | 6 ¹⁵ / ₁₆ | 16 | 19 |
| 220 | 48 | 130 | 96 | 29 ⁷ / ₁₆ | 24 ⁷ / ₈ | 13 ³ / ₁₆ | 28 ¹ / ₄ | 11 ⁷ / ₁₆ | 29 ⁵ / ₈ | 19 |
| 222 | 48 | 130 | 96 | 29 ⁷ / ₁₆ | 27 ³ / ₈ | 13 ³ / ₁₆ | 28 ¹ / ₄ | 11 ⁷ / ₁₆ | 24 ³ / ₈ | 19 |
| 225 | 60 | 154 | 96 | 38 ⁷ / ₈ | 31 ³ / ₈ | 17 ⁷ / ₁₆ | 37 ³ / ₄ | 14 ⁷ / ₁₆ | 37 ³ / ₈ | 12 ⁵ / ₁₆ |
| 230 | 60 | 154 | 96 | 38 ⁷ / ₈ | 36 ⁷ / ₈ | 17 ⁷ / ₁₆ | 37 ³ / ₄ | 14 ⁷ / ₁₆ | 26 ⁵ / ₈ | 12 ⁵ / ₁₆ |
| Model | Dimensions | | | | | | | | | |
| | K | L | M | N | P | R | S | T | U | V |
| 215 | 14 ¹ / ₄ | 7 ⁷ / ₈ | 18 ¹⁵ / ₁₆ | 14 | 65 ³ / ₄ | 32 | 54 | 20 ¹ / ₄ | 84 | 22 |
| 218 | 14 ¹ / ₄ | 7 ⁷ / ₈ | 22 ¹ / ₁₆ | 14 | 65 ³ / ₄ | 32 | 54 | 20 ¹ / ₄ | 84 | 22 |
| 220 | 14 ¹ / ₄ | 12 ³ / ₈ | 25 ¹ / ₁₆ | 22 ⁵ / ₈ | 87 ³ / ₈ | 44 ¹ / ₂ | 60 | 20 ¹ / ₄ | 120 | 22 |
| 222 | 14 ¹ / ₄ | 12 ³ / ₈ | 27 ¹ / ₁₆ | 22 ⁵ / ₈ | 87 ³ / ₈ | 44 ¹ / ₂ | 60 | 20 ¹ / ₄ | 120 | 22 |
| 225 | 20 ¹ / ₄ | 15 ³ / ₈ | 31 ¹ / ₂ | 24 ³ / ₈ | 111 ³ / ₈ | 56 ¹ / ₂ | 65 | 26 ¹ / ₂ | 144 | 28 |
| 230 | 20 ¹ / ₄ | 15 ³ / ₈ | 37 | 24 ³ / ₈ | 111 ³ / ₈ | 56 ¹ / ₂ | 65 | 26 ¹ / ₂ | 144 | 28 |

NOTE: All dimensions in inches subject to manufacturing tolerances.


Dimensions

Twin Blower Models — Sizes 233 And 240

C000200B

UNIT COMPONENTS

- | | | | |
|---------------------------|---------------------------------------|-------------------------------------|---|
| 1. Centrifugal supply fan | 4. Control cabinet | 7. Access door | 10. Unit base |
| 2. Fan motor | 5. Hinged control cabinet access door | 8. Access door (piping compartment) | 11. Manifold compartment |
| 3. Line burner | 6. Observation port | 9. Lifting lug | 12. Return air flow station (required for ETL listed Return Air Unit) |

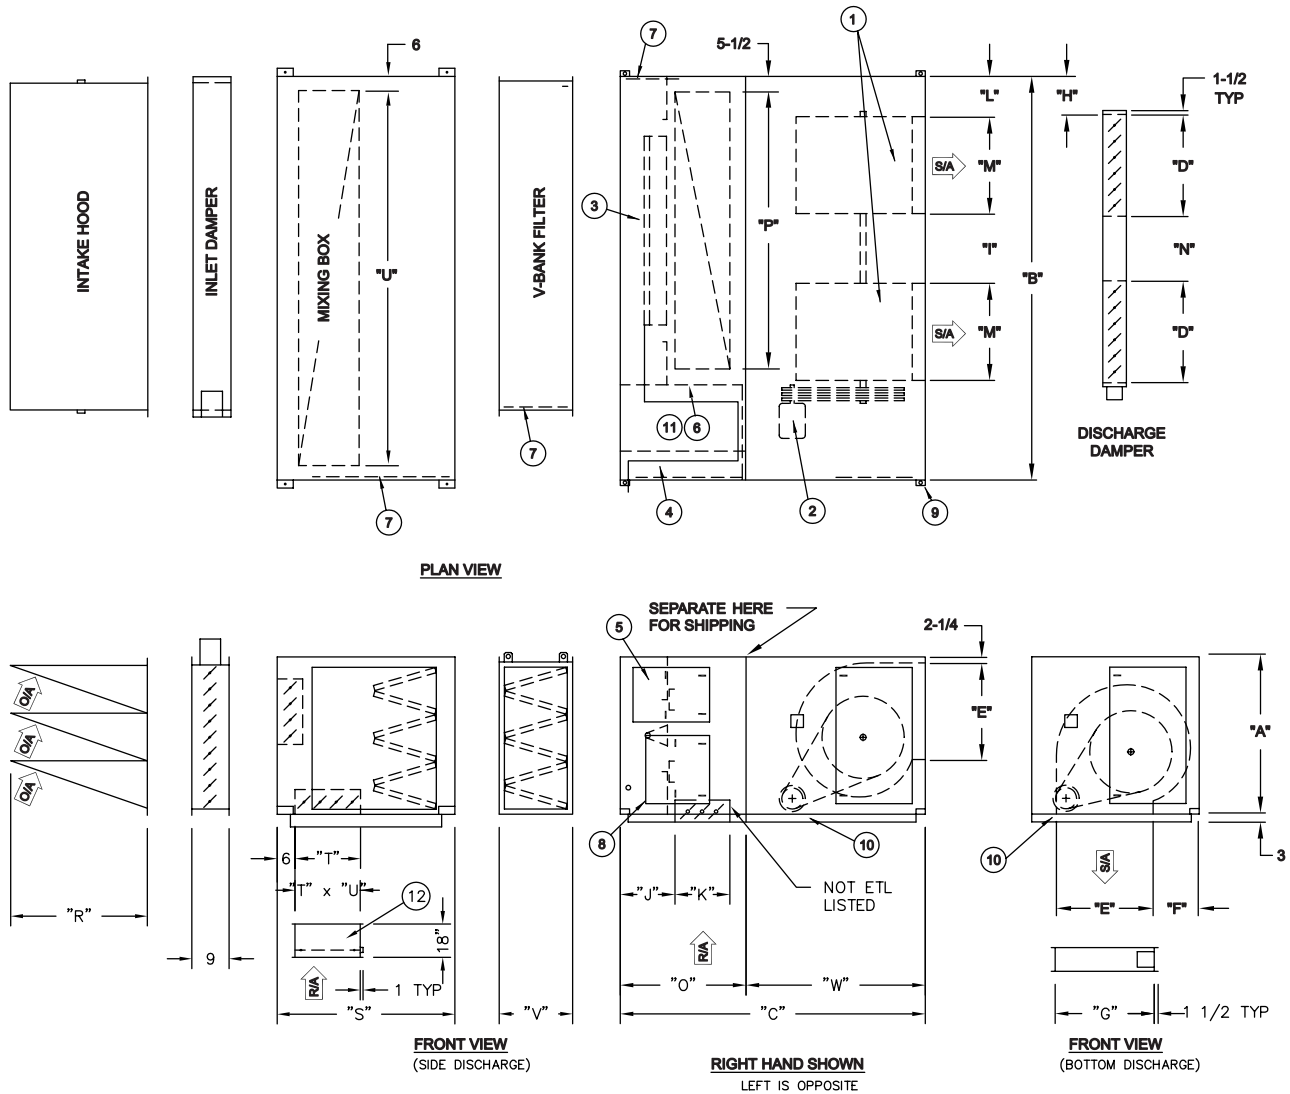


| Model | Dimensions | | | | | | | | | | |
|-------|------------------|------------------|------------------|------------------|-------------------|-------------------|----|-------------------|------------------|----|------------------|
| | A | B | C | D | E | F | G | H | I | J | K |
| 233 | 68 | 175 | 117 | 41 $\frac{3}{4}$ | 43 $\frac{1}{16}$ | 19 $\frac{1}{16}$ | 44 | 16 $\frac{1}{16}$ | 36 | 20 | 20 $\frac{1}{4}$ |
| 240 | 79 $\frac{1}{4}$ | 210 | 131 | 55 $\frac{3}{4}$ | 41 | 33 | 42 | 19 $\frac{1}{16}$ | 39 $\frac{3}{8}$ | 20 | 20 $\frac{1}{4}$ |
| Model | Dimensions | | | | | | | | | | |
| | L | M | N | O | P | R | S | T | U | V | W |
| 233 | 17 | 39 $\frac{3}{8}$ | 34 $\frac{1}{8}$ | 45 | 130 | 56 $\frac{1}{2}$ | 70 | 31 $\frac{1}{4}$ | 163 | 28 | 72 |
| 240 | 20 | 53 $\frac{3}{8}$ | 38 | 45 | 166 | 51 $\frac{1}{2}$ | 70 | 31 $\frac{1}{4}$ | 198 | 28 | 86 |

NOTE: All dimensions in inches subject to manufacturing tolerances.

Dimensions

Roof Curbs For 100% Make-Up Air Units


C000555

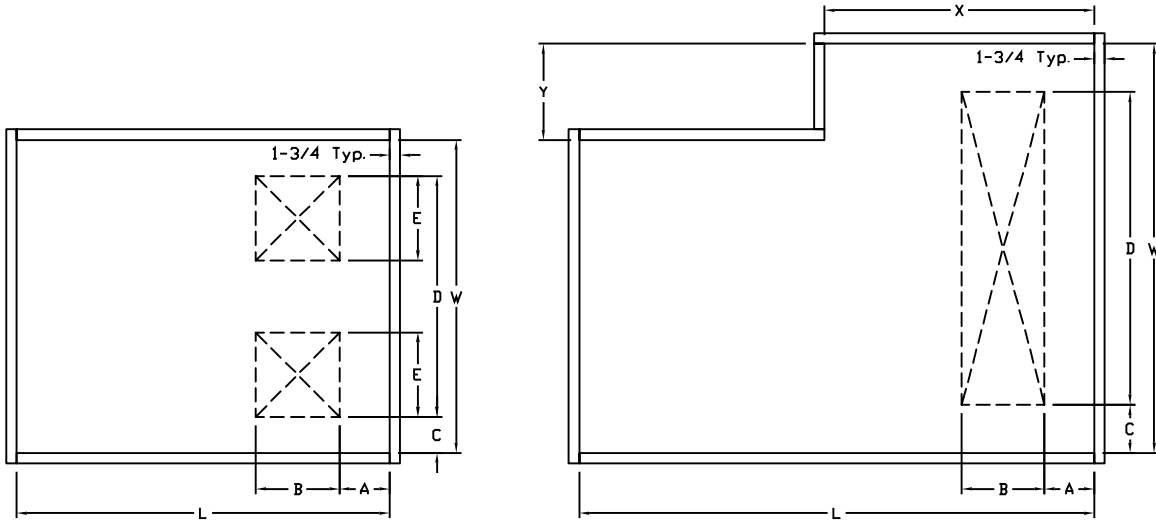

| Model | Without Cooling | | | | | | | With CW or DX Cooling | | | | | | | |
|-------|----------------------------------|---------------------------------|----------------------------------|----------------------------------|----------------------------------|---------------------------------|---------------------------------|-------------------------------|--------------------------------|-------------------------------|-----|---------------------------------|---------------------------------|---------------------------------|-----|
| | A | B | C | D | E | L | W | A | B | C | D | L | W | X | Y |
| 109 | 12 ³ / ₈ | 10 ³ / ₈ | 22 ¹³ / ₁₆ | 11 ¹⁵ / ₁₆ | N/A | 71 ¹ / ₂ | 46 ¹ / ₂ | 3 ¹ / ₄ | 18 | 3 ¹ / ₄ | 40 | 153 ¹ / ₂ | 46 ¹ / ₂ | 76 ¹ / ₂ | 0 |
| 112 | 10 ¹³ / ₁₆ | 13 ³ / ₁₆ | 20 ¹³ / ₁₆ | 15 ¹⁵ / ₁₆ | N/A | 71 ¹ / ₂ | 46 ¹ / ₂ | 3 ¹ / ₄ | 18 | 3 ¹ / ₄ | 40 | 153 ¹ / ₂ | 46 ¹ / ₂ | 76 ¹ / ₂ | 0 |
| 115 | 9 ⁵ / ₈ | 16 | 19 ³ / ₁₆ | 18 ¹⁵ / ₁₆ | N/A | 71 ¹ / ₂ | 46 ¹ / ₂ | 3 ¹ / ₄ | 18 | 3 ¹ / ₄ | 52 | 181 ¹ / ₂ | 58 ¹ / ₂ | 104 ¹ / ₂ | 12 |
| 118 | 9 ⁵ / ₈ | 19 | 19 ³ / ₁₆ | 22 ¹ / ₁₆ | N/A | 71 ¹ / ₂ | 46 ¹ / ₂ | 3 ¹ / ₄ | 18 | 3 ¹ / ₄ | 52 | 181 ¹ / ₂ | 58 ¹ / ₂ | 104 ¹ / ₂ | 12 |
| 120 | 10 ⁷ / ₁₆ | 24 ⁷ / ₈ | 37 ¹³ / ₁₆ | 25 ¹ / ₁₆ | N/A | 90 ¹ / ₂ | 72 ¹ / ₂ | 3 ¹ / ₄ | 26 | 3 ¹ / ₄ | 86 | 214 ¹ / ₂ | 92 ¹ / ₂ | 118 ¹ / ₂ | 20 |
| 122 | 10 ⁷ / ₁₆ | 27 ³ / ₈ | 35 ⁵ / ₁₆ | 27 ⁷ / ₁₆ | N/A | 90 ¹ / ₂ | 72 ¹ / ₂ | 3 ¹ / ₄ | 26 | 3 ¹ / ₄ | 86 | 214 ¹ / ₂ | 92 ¹ / ₂ | 118 ¹ / ₂ | 20 |
| 125 | 14 ¹³ / ₁₆ | 31 ³ / ₈ | 41 ³ / ₈ | 31 ¹ / ₂ | N/A | 90 ¹ / ₂ | 85 ¹ / ₂ | 3 ¹ / ₄ | 34 ¹ / ₂ | 3 ¹ / ₄ | 104 | 246 ¹ / ₂ | 110 ¹ / ₂ | 150 ¹ / ₂ | 25 |
| 130 | 14 ¹³ / ₁₆ | 36 ⁷ / ₈ | 35 ⁷ / ₈ | 37 | N/A | 90 ¹ / ₂ | 85 ¹ / ₂ | 3 ¹ / ₄ | 34 ¹ / ₂ | 3 ¹ / ₄ | 104 | 246 ¹ / ₂ | 110 ¹ / ₂ | 150 ¹ / ₂ | 25 |
| 215 | 9 ⁵ / ₈ | 16 | 23 ¹ / ₄ | 60 ¹ / ₈ | 18 ¹⁵ / ₁₆ | 71 ¹ / ₂ | 88 ¹ / ₂ | 3 ¹ / ₄ | 18 | 3 ¹ / ₄ | 94 | 181 ¹ / ₂ | 100 ¹ / ₂ | 104 ¹ / ₂ | 12 |
| 218 | 9 ⁵ / ₈ | 19 | 23 ¹ / ₄ | 60 ¹ / ₈ | 22 ¹ / ₁₆ | 71 ¹ / ₂ | 88 ¹ / ₂ | 3 ¹ / ₄ | 18 | 3 ¹ / ₄ | 94 | 181 ¹ / ₂ | 100 ¹ / ₂ | 104 ¹ / ₂ | 12 |
| 220 | 10 ⁷ / ₁₆ | 24 ⁷ / ₈ | 35 ¹ / ₈ | 79 ³ / ₄ | 25 ¹ / ₁₆ | 90 ¹ / ₂ | 124 ¹ / ₂ | 3 ¹ / ₄ | 26 | 3 ¹ / ₄ | 142 | 214 ¹ / ₂ | 148 ¹ / ₂ | 118 ¹ / ₂ | 24 |
| 222 | 10 ⁷ / ₁₆ | 27 ³ / ₈ | 35 ¹ / ₈ | 79 ³ / ₄ | 27 ⁷ / ₁₆ | 90 ¹ / ₂ | 124 ¹ / ₂ | 3 ¹ / ₄ | 26 | 3 ¹ / ₄ | 142 | 214 ¹ / ₂ | 148 ¹ / ₂ | 118 ¹ / ₂ | 24 |
| 225 | 14 ¹³ / ₁₆ | 31 ³ / ₈ | 35 ¹ / ₄ | 100 ⁵ / ₈ | 31 ¹ / ₂ | 90 ¹ / ₂ | 148 ¹ / ₂ | 3 ¹ / ₄ | 34 ¹ / ₂ | 3 ¹ / ₄ | 167 | 246 ¹ / ₂ | 173 ¹ / ₂ | 150 ¹ / ₂ | 25 |
| 230 | 14 ¹³ / ₁₆ | 36 ⁷ / ₈ | 35 ¹ / ₄ | 100 ⁵ / ₈ | 37 | 90 ¹ / ₂ | 148 ¹ / ₂ | 3 ¹ / ₄ | 34 ¹ / ₂ | 3 ¹ / ₄ | 167 | 246 ¹ / ₂ | 173 ¹ / ₂ | 150 ¹ / ₂ | 25 |
| 233 | 16 ¹¹ / ₁₆ | 43 ¹ / ₁₆ | 39 ¹ / ₂ | 115 ³ / ₄ | 39 ⁷ / ₈ | 111 ¹ / ₂ | 169 ¹ / ₂ | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| 240 | 30 ¹ / ₄ | 41 | 39 ³ / ₈ | 147 ⁵ / ₈ | 53 ⁷ / ₈ | 125 ¹ / ₂ | 204 ¹ / ₂ | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |

NOTES:


1. All dimensions in inches subject to manufacturing tolerances.
2. Curb to be shipped loose and assembled in the field.
3. Curb must be installed square and level.
4. Curb requires intermediate structural support and is not to be corner post mounted.
5. Gaskets to be shipped with unit.
6. Bolting accessories shipped with curb.
7. Curb drawings shown are for units which have controls on the "standard" side.
8. Available on horizontal units only.

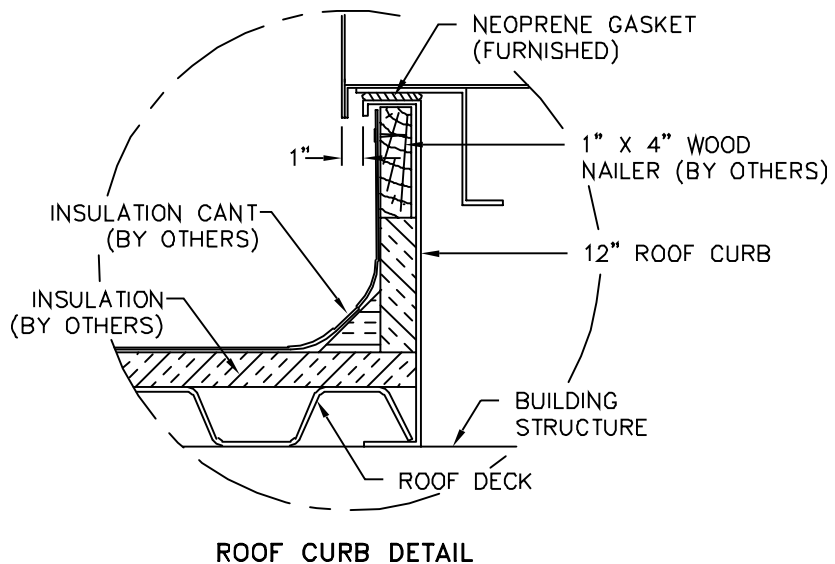

Dimensions

Roof Curbs For Base Units With Return Air After Burner


C000556

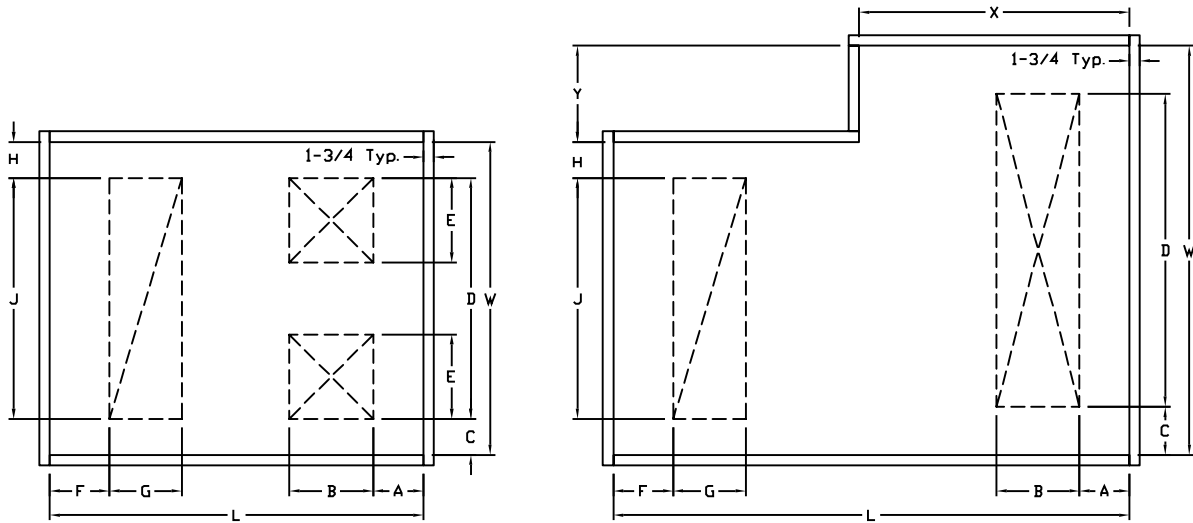

| Model | Without Cooling | | | | | | | With CW or DX Cooling | | | | | | | All Models | | | | |
|-------|----------------------------------|---------------------------------|----------------------------------|----------------------------------|----------------------------------|---------------------------------|---------------------------------|-------------------------------|--------------------------------|-------------------------------|-----|---------------------------------|---------------------------------|---------------------------------|------------|--------------------------------|--------------------------------|-------------------------------|---------------------------------|
| | A | B | C | D | E | L | W | A | B | C | D | L | W | X | Y | F | G | H | J |
| 109 | 12 ³ / ₈ | 10 ³ / ₈ | 22 ¹³ / ₁₆ | 11 ¹⁵ / ₁₆ | N/A | 71 ¹ / ₂ | 46 ¹ / ₂ | 3 ¹ / ₄ | 18 | 3 ¹ / ₄ | 40 | 153 ¹ / ₂ | 46 ¹ / ₂ | 76 ¹ / ₂ | 0 | 16 ¹ / ₄ | 14 ¹ / ₄ | 2 ³ / ₄ | 27 ³ / ₄ |
| 112 | 10 ¹³ / ₁₆ | 13 ³ / ₁₆ | 20 ¹³ / ₁₆ | 15 ¹⁵ / ₁₆ | N/A | 71 ¹ / ₂ | 46 ¹ / ₂ | 3 ¹ / ₄ | 18 | 3 ¹ / ₄ | 40 | 153 ¹ / ₂ | 46 ¹ / ₂ | 76 ¹ / ₂ | 0 | 16 ¹ / ₄ | 14 ¹ / ₄ | 2 ³ / ₄ | 27 ³ / ₄ |
| 115 | 9 ⁵ / ₈ | 16 | 19 ⁹ / ₁₆ | 18 ¹⁵ / ₁₆ | N/A | 71 ¹ / ₂ | 46 ¹ / ₂ | 3 ¹ / ₄ | 18 | 3 ¹ / ₄ | 52 | 181 ¹ / ₂ | 58 ¹ / ₂ | 104 ¹ / ₂ | 12 | 16 ¹ / ₄ | 14 ¹ / ₄ | 2 ³ / ₄ | 27 ³ / ₄ |
| 118 | 9 ⁵ / ₈ | 19 | 19 ⁹ / ₁₆ | 22 ⁷ / ₁₆ | N/A | 71 ¹ / ₂ | 46 ¹ / ₂ | 3 ¹ / ₄ | 18 | 3 ¹ / ₄ | 52 | 181 ¹ / ₂ | 58 ¹ / ₂ | 104 ¹ / ₂ | 12 | 16 ¹ / ₄ | 14 ¹ / ₄ | 2 ³ / ₄ | 27 ³ / ₄ |
| 120 | 10 ⁷ / ₁₆ | 24 ⁷ / ₈ | 37 ¹³ / ₁₆ | 25 ¹ / ₁₆ | N/A | 90 ¹ / ₂ | 72 ¹ / ₂ | 3 ¹ / ₄ | 26 | 3 ¹ / ₄ | 86 | 214 ¹ / ₂ | 92 ¹ / ₂ | 118 ¹ / ₂ | 20 | 16 ¹ / ₄ | 14 ¹ / ₄ | 2 ³ / ₄ | 48 |
| 122 | 10 ⁷ / ₁₆ | 27 ³ / ₈ | 35 ⁵ / ₁₆ | 27 ⁷ / ₁₆ | N/A | 90 ¹ / ₂ | 72 ¹ / ₂ | 3 ¹ / ₄ | 26 | 3 ¹ / ₄ | 86 | 214 ¹ / ₂ | 92 ¹ / ₂ | 118 ¹ / ₂ | 20 | 16 ¹ / ₄ | 14 ¹ / ₄ | 2 ³ / ₄ | 48 |
| 125 | 14 ¹³ / ₁₆ | 31 ³ / ₈ | 41 ³ / ₈ | 31 ¹ / ₂ | N/A | 90 ¹ / ₂ | 85 ¹ / ₂ | 3 ¹ / ₄ | 34 ¹ / ₂ | 3 ¹ / ₄ | 104 | 246 ¹ / ₂ | 110 ¹ / ₂ | 150 ¹ / ₂ | 25 | 9 ⁹ / ₁₆ | 20 ¹ / ₄ | 2 ³ / ₄ | 49 |
| 130 | 14 ¹³ / ₁₆ | 36 ⁷ / ₈ | 35 ⁵ / ₈ | 37 | N/A | 90 ¹ / ₂ | 85 ¹ / ₂ | 3 ¹ / ₄ | 34 ¹ / ₂ | 3 ¹ / ₄ | 104 | 246 ¹ / ₂ | 110 ¹ / ₂ | 150 ¹ / ₂ | 25 | 9 ⁹ / ₁₆ | 20 ¹ / ₄ | 2 ³ / ₄ | 49 |
| 215 | 9 ⁵ / ₈ | 16 | 23 ¹ / ₄ | 60 ³ / ₈ | 18 ¹⁵ / ₁₆ | 71 ¹ / ₂ | 88 ¹ / ₂ | 3 ¹ / ₄ | 18 | 3 ¹ / ₄ | 94 | 181 ¹ / ₂ | 100 ¹ / ₂ | 104 ¹ / ₂ | 12 | 16 ¹ / ₄ | 14 ¹ / ₄ | 2 ³ / ₄ | 65 ³ / ₄ |
| 218 | 9 ⁵ / ₈ | 19 | 23 ¹ / ₄ | 60 ³ / ₈ | 22 ⁷ / ₁₆ | 71 ¹ / ₂ | 88 ¹ / ₂ | 3 ¹ / ₄ | 18 | 3 ¹ / ₄ | 94 | 181 ¹ / ₂ | 100 ¹ / ₂ | 104 ¹ / ₂ | 12 | 16 ¹ / ₄ | 14 ¹ / ₄ | 2 ³ / ₄ | 65 ³ / ₄ |
| 220 | 10 ⁷ / ₁₆ | 24 ⁷ / ₈ | 35 ⁵ / ₈ | 79 ³ / ₄ | 25 ¹ / ₁₆ | 90 ¹ / ₂ | 124 ¹ / ₂ | 3 ¹ / ₄ | 26 | 3 ¹ / ₄ | 142 | 214 ¹ / ₂ | 148 ¹ / ₂ | 118 ¹ / ₂ | 24 | 16 ¹ / ₄ | 14 ¹ / ₄ | 2 ³ / ₄ | 87 ³ / ₈ |
| 222 | 10 ⁷ / ₁₆ | 27 ³ / ₈ | 35 ⁵ / ₈ | 79 ³ / ₄ | 27 ⁷ / ₁₆ | 90 ¹ / ₂ | 124 ¹ / ₂ | 3 ¹ / ₄ | 26 | 3 ¹ / ₄ | 142 | 214 ¹ / ₂ | 148 ¹ / ₂ | 118 ¹ / ₂ | 24 | 16 ¹ / ₄ | 14 ¹ / ₄ | 2 ³ / ₄ | 87 ³ / ₈ |
| 225 | 14 ¹³ / ₁₆ | 31 ³ / ₈ | 35 ¹ / ₄ | 100 ⁵ / ₈ | 31 ¹ / ₂ | 90 ¹ / ₂ | 148 ¹ / ₂ | 3 ¹ / ₄ | 34 ¹ / ₂ | 3 ¹ / ₄ | 167 | 246 ¹ / ₂ | 173 ¹ / ₂ | 150 ¹ / ₂ | 25 | 9 ⁹ / ₁₆ | 20 ¹ / ₄ | 2 ³ / ₄ | 111 ³ / ₈ |
| 230 | 14 ¹³ / ₁₆ | 36 ⁷ / ₈ | 35 ¹ / ₄ | 100 ⁵ / ₈ | 37 | 90 ¹ / ₂ | 148 ¹ / ₂ | 3 ¹ / ₄ | 34 ¹ / ₂ | 3 ¹ / ₄ | 167 | 246 ¹ / ₂ | 173 ¹ / ₂ | 150 ¹ / ₂ | 25 | 9 ⁹ / ₁₆ | 20 ¹ / ₄ | 2 ³ / ₄ | 111 ³ / ₈ |
| 233 | 16 ¹¹ / ₁₆ | 43 ¹ / ₁₆ | 39 ¹ / ₂ | 115 ³ / ₄ | 39 ³ / ₈ | 111 ¹ / ₂ | 169 ¹ / ₂ | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | 17 ¹ / ₄ | 20 ¹ / ₄ | 2 ³ / ₄ | 130 |
| 240 | 30 ¹ / ₄ | 41 | 39 ³ / ₈ | 147 ⁵ / ₈ | 53 ³ / ₈ | 125 ¹ / ₂ | 204 ¹ / ₂ | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | 17 ¹ / ₄ | 20 ¹ / ₄ | 2 ³ / ₄ | 166 |

NOTES:


- All dimensions in inches subject to manufacturing tolerances.
- Curb to be shipped loose and assembled in the field.
- Curb must be installed square and level.
- Curb requires intermediate structural support and is not to be corner post mounted.
- Gaskets to be shipped with unit.
- Bolting accessories shipped with curb.
- Curb drawings shown are for units which have controls on the "standard" side.
- Available on horizontal units only.

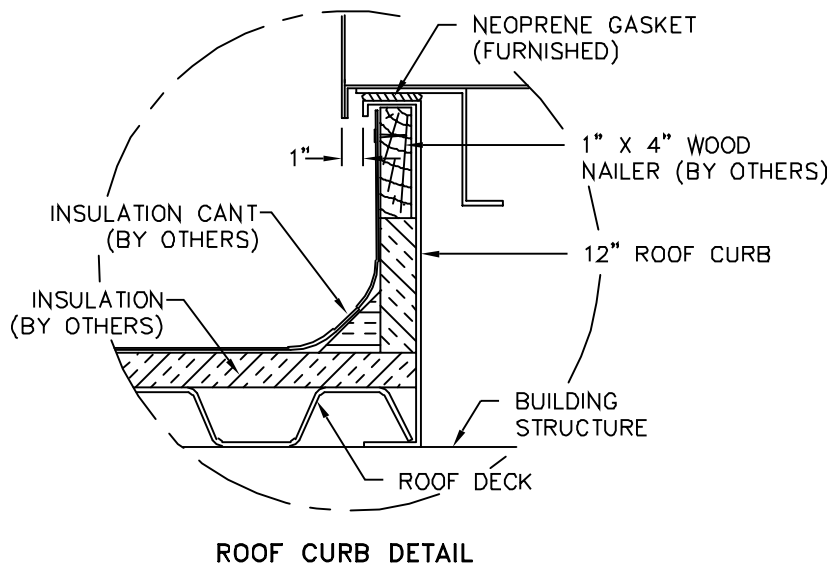

Dimensions

Roof Curbs For Base Units With Return Air Before Burner


C000557

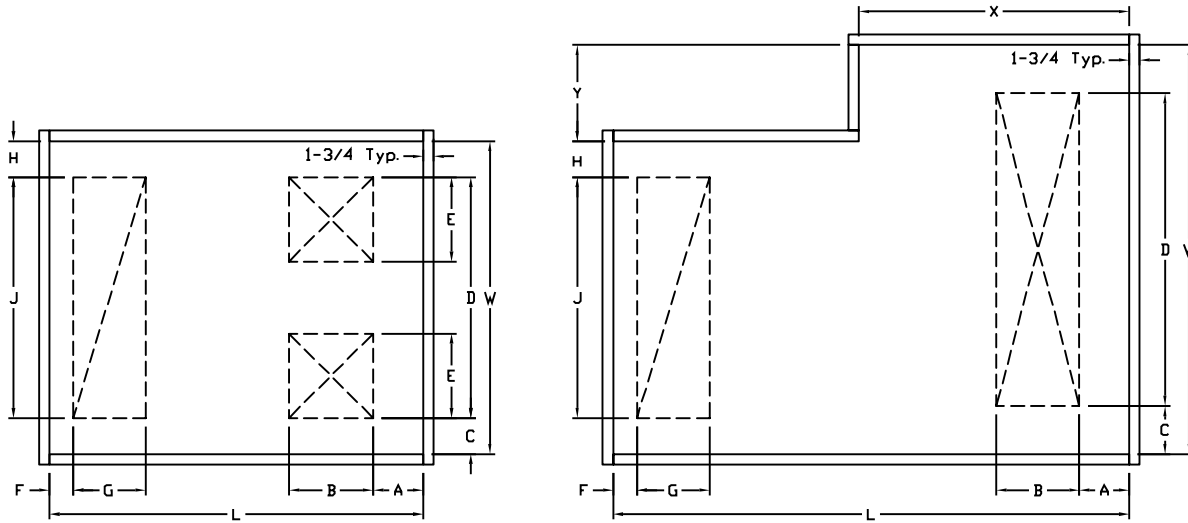

| Model | Without Cooling | | | | | | | With CW or DX Cooling | | | | | | | All Models | | | | |
|-------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|-------------------------------|--------------------------------|-------------------------------|-----|---------------------------------|---------------------------------|---------------------------------|------------|-------------------------------|--------------------------------|-------------------------------|-----|
| | A | B | C | D | E | L | W | A | B | C | D | L | W | X | Y | F | G | H | J |
| 109 | 12 ³ / ₈ | 10 ³ / ₈ | 22 ¹ / ₁₆ | 11 ¹ / ₁₆ | N/A | 125 ¹ / ₂ | 46 ¹ / ₂ | 3 ³ / ₄ | 18 | 3 ³ / ₄ | 40 | 207 ¹ / ₂ | 46 ¹ / ₂ | 76 ¹ / ₂ | 0 | 3 ³ / ₄ | 20 ¹ / ₄ | 2 ¹ / ₄ | 42 |
| 112 | 10 ¹ / ₁₆ | 13 ¹ / ₁₆ | 20 ¹ / ₁₆ | 15 ¹ / ₁₆ | N/A | 125 ¹ / ₂ | 46 ¹ / ₂ | 3 ³ / ₄ | 18 | 3 ³ / ₄ | 40 | 207 ¹ / ₂ | 46 ¹ / ₂ | 76 ¹ / ₂ | 0 | 3 ³ / ₄ | 20 ¹ / ₄ | 2 ¹ / ₄ | 42 |
| 115 | 9 ⁵ / ₈ | 16 | 19 ⁹ / ₁₆ | 18 ¹ / ₁₆ | N/A | 125 ¹ / ₂ | 46 ¹ / ₂ | 3 ³ / ₄ | 18 | 3 ³ / ₄ | 52 | 235 ¹ / ₂ | 58 ¹ / ₂ | 104 ¹ / ₂ | 12 | 3 ³ / ₄ | 20 ¹ / ₄ | 2 ¹ / ₄ | 42 |
| 118 | 9 ⁵ / ₈ | 19 | 19 ⁹ / ₁₆ | 22 ¹ / ₁₆ | N/A | 125 ¹ / ₂ | 46 ¹ / ₂ | 3 ³ / ₄ | 18 | 3 ³ / ₄ | 52 | 235 ¹ / ₂ | 58 ¹ / ₂ | 104 ¹ / ₂ | 12 | 3 ³ / ₄ | 20 ¹ / ₄ | 2 ¹ / ₄ | 42 |
| 120 | 10 ⁷ / ₁₆ | 24 ⁷ / ₈ | 37 ³ / ₁₆ | 25 ¹ / ₁₆ | N/A | 150 ¹ / ₂ | 72 ¹ / ₂ | 3 ³ / ₄ | 26 | 3 ³ / ₄ | 86 | 274 ¹ / ₂ | 92 ¹ / ₂ | 118 ¹ / ₂ | 20 | 3 ³ / ₄ | 20 ¹ / ₄ | 2 ¹ / ₄ | 68 |
| 122 | 10 ⁷ / ₁₆ | 27 ³ / ₈ | 35 ³ / ₁₆ | 27 ⁷ / ₁₆ | N/A | 150 ¹ / ₂ | 72 ¹ / ₂ | 3 ³ / ₄ | 26 | 3 ³ / ₄ | 86 | 274 ¹ / ₂ | 92 ¹ / ₂ | 118 ¹ / ₂ | 20 | 3 ³ / ₄ | 20 ¹ / ₄ | 2 ¹ / ₄ | 68 |
| 125 | 14 ¹ / ₁₆ | 31 ³ / ₈ | 41 ³ / ₈ | 31 ¹ / ₂ | N/A | 155 ¹ / ₂ | 85 ¹ / ₂ | 3 ³ / ₄ | 34 ¹ / ₂ | 3 ³ / ₄ | 104 | 311 ¹ / ₂ | 110 ¹ / ₂ | 150 ¹ / ₂ | 25 | 3 ³ / ₄ | 26 ¹ / ₂ | 2 ¹ / ₄ | 81 |
| 130 | 14 ¹ / ₁₆ | 36 ⁷ / ₈ | 35 ⁷ / ₈ | 37 | N/A | 155 ¹ / ₂ | 85 ¹ / ₂ | 3 ³ / ₄ | 34 ¹ / ₂ | 3 ³ / ₄ | 104 | 311 ¹ / ₂ | 110 ¹ / ₂ | 150 ¹ / ₂ | 25 | 3 ³ / ₄ | 26 ¹ / ₂ | 2 ¹ / ₄ | 81 |
| 215 | 9 ⁵ / ₈ | 16 | 23 ¹ / ₄ | 60 ¹ / ₈ | 18 ¹ / ₁₆ | 125 ¹ / ₂ | 88 ¹ / ₂ | 3 ³ / ₄ | 18 | 3 ³ / ₄ | 94 | 235 ¹ / ₂ | 100 ¹ / ₂ | 104 ¹ / ₂ | 12 | 3 ³ / ₄ | 20 ¹ / ₄ | 2 ¹ / ₄ | 84 |
| 218 | 9 ⁵ / ₈ | 19 | 23 ¹ / ₄ | 60 ¹ / ₈ | 22 ¹ / ₁₆ | 125 ¹ / ₂ | 88 ¹ / ₂ | 3 ³ / ₄ | 18 | 3 ³ / ₄ | 94 | 235 ¹ / ₂ | 100 ¹ / ₂ | 104 ¹ / ₂ | 12 | 3 ³ / ₄ | 20 ¹ / ₄ | 2 ¹ / ₄ | 84 |
| 220 | 10 ⁷ / ₁₆ | 24 ⁷ / ₈ | 35 ⁷ / ₈ | 79 ³ / ₄ | 25 ¹ / ₁₆ | 150 ¹ / ₂ | 124 ¹ / ₂ | 3 ³ / ₄ | 26 | 3 ³ / ₄ | 142 | 274 ¹ / ₂ | 148 ¹ / ₂ | 118 ¹ / ₂ | 24 | 3 ³ / ₄ | 20 ¹ / ₄ | 2 ¹ / ₄ | 120 |
| 222 | 10 ⁷ / ₁₆ | 27 ³ / ₈ | 35 ⁷ / ₈ | 79 ³ / ₄ | 27 ⁷ / ₁₆ | 150 ¹ / ₂ | 124 ¹ / ₂ | 3 ³ / ₄ | 26 | 3 ³ / ₄ | 142 | 274 ¹ / ₂ | 148 ¹ / ₂ | 118 ¹ / ₂ | 24 | 3 ³ / ₄ | 20 ¹ / ₄ | 2 ¹ / ₄ | 120 |
| 225 | 14 ¹ / ₁₆ | 31 ³ / ₈ | 35 ¹ / ₄ | 100 ⁰ / ₈ | 31 ¹ / ₂ | 155 ¹ / ₂ | 148 ¹ / ₂ | 3 ³ / ₄ | 34 ¹ / ₂ | 3 ³ / ₄ | 167 | 311 ¹ / ₂ | 173 ¹ / ₂ | 150 ¹ / ₂ | 25 | 3 ³ / ₄ | 26 ¹ / ₂ | 2 ¹ / ₄ | 144 |
| 230 | 14 ¹ / ₁₆ | 36 ⁷ / ₈ | 35 ¹ / ₄ | 100 ⁰ / ₈ | 37 | 155 ¹ / ₂ | 148 ¹ / ₂ | 3 ³ / ₄ | 34 ¹ / ₂ | 3 ³ / ₄ | 167 | 311 ¹ / ₂ | 173 ¹ / ₂ | 150 ¹ / ₂ | 25 | 3 ³ / ₄ | 26 ¹ / ₂ | 2 ¹ / ₄ | 144 |
| 233 | 16 ¹ / ₁₆ | 43 ¹ / ₁₆ | 39 ¹ / ₂ | 115 ³ / ₄ | 39 ⁷ / ₈ | 181 ¹ / ₂ | 169 ¹ / ₂ | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | 3 ³ / ₄ | 31 ¹ / ₄ | 3 ³ / ₄ | 163 |
| 240 | 30 ¹ / ₄ | 41 | 39 ³ / ₈ | 147 ³ / ₈ | 53 ³ / ₈ | 195 ¹ / ₂ | 204 ¹ / ₂ | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | 3 ³ / ₄ | 31 ¹ / ₄ | 3 ³ / ₄ | 198 |

NOTES:

1. All dimensions in inches subject to manufacturing tolerances.
2. Curb to be shipped loose and assembled in the field.
3. Curb must be installed square and level.
4. Curb requires intermediate structural support and is not to be corner post mounted.
5. Gaskets to be shipped with unit.
6. Bolting accessories shipped with curb.
7. Curb drawings shown are for units which have controls on the "standard" side.
8. Available on horizontal units only.

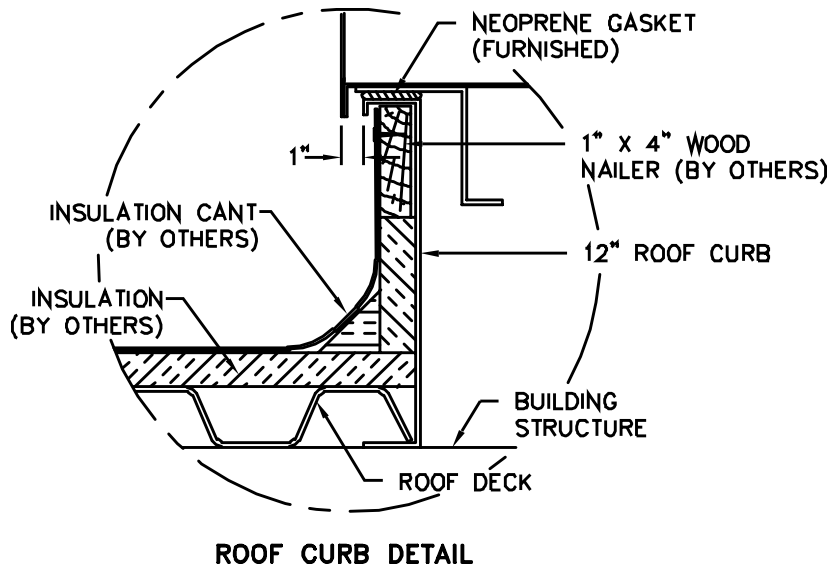


Dimensions

Vertical Models — Sizes 109 Through 130

C000496A

UNIT COMPONENTS

- | | | | |
|---------------------------|---------------------------------------|-------------------------------------|--------------------------|
| 1. Centrifugal supply fan | 4. Control cabinet | 7. Access door | 10. Unit base |
| 2. Fan motor | 5. Hinged control cabinet access door | 8. Access door (piping compartment) | 11. Manifold compartment |
| 3. Line burner | 6. Observation port | 9. Lifting lug | |

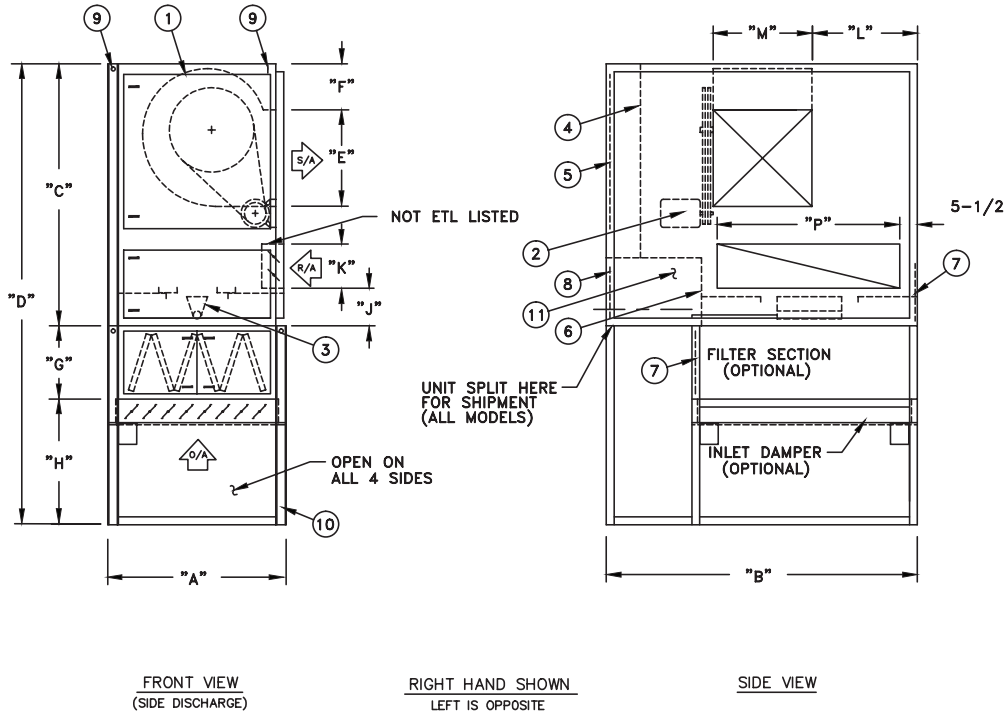

| Model | Dimensions | | | | | | |
|-------|------------|----|----|-----|---------------------------------|---------------------------------|----|
| | A | B | C | D | E | F | G |
| 109 | 42 | 52 | 77 | 135 | 10 ⁹ / ₁₆ | 15 ¹ / ₈ | 22 |
| 112 | 42 | 52 | 77 | 135 | 13 ³ / ₁₆ | 13 ³ / ₁₆ | 22 |
| 115 | 42 | 52 | 77 | 135 | 16 | 12 ³ / ₈ | 22 |
| 118 | 42 | 52 | 77 | 135 | 19 | 12 ³ / ₈ | 22 |
| 120 | 56 | 78 | 96 | 166 | 24 ⁷ / ₈ | 13 ³ / ₁₆ | 22 |
| 122 | 56 | 78 | 96 | 166 | 27 ³ / ₈ | 13 ³ / ₁₆ | 22 |
| 125 | 68 | 91 | 96 | 172 | 31 ³ / ₈ | 17 ⁷ / ₁₆ | 28 |
| 130 | 68 | 91 | 96 | 172 | 36 ⁷ / ₈ | 17 ⁷ / ₁₆ | 28 |

| Model | Dimensions | | | | | |
|-------|------------|---------------------------------|--------------------------------|--------------------------------|----------------------------------|--------------------------------|
| | H | J | K | L | M | P |
| 109 | 36 | 19 | 14 ¹ / ₄ | 14 ¹ / ₂ | 11 ¹⁵ / ₁₆ | 27 ³ / ₄ |
| 112 | 36 | 19 | 14 ¹ / ₄ | 12 ¹ / ₂ | 15 ¹⁵ / ₁₆ | 27 ³ / ₄ |
| 115 | 36 | 19 | 14 ¹ / ₄ | 11 ¹ / ₈ | 18 ¹⁵ / ₁₆ | 27 ³ / ₄ |
| 118 | 36 | 19 | 14 ¹ / ₄ | 7 ⁷ / ₈ | 22 ¹ / ₁₆ | 27 ³ / ₄ |
| 120 | 48 | 19 | 14 ¹ / ₄ | 12 ³ / ₈ | 25 ¹ / ₁₆ | 48 |
| 122 | 48 | 19 | 14 ¹ / ₄ | 12 ³ / ₈ | 27 ⁷ / ₁₆ | 48 |
| 125 | 48 | 12 ³ / ₁₆ | 20 ¹ / ₄ | 15 ³ / ₈ | 31 ¹ / ₂ | 49 |
| 130 | 48 | 12 ³ / ₁₆ | 20 ¹ / ₄ | 15 ³ / ₈ | 37 | 49 |

NOTE: All dimensions in inches subject to manufacturing tolerances.


Dimensions

Vertical Models — Sizes 109 Through 130 with Mixing Box

C000550B

UNIT COMPONENTS

- | | | | |
|---------------------------|---------------------------------------|-------------------------------------|---|
| 1. Centrifugal supply fan | 4. Control cabinet | 7. Access door | 10. Unit support stand |
| 2. Fan motor | 5. Hinged control cabinet access door | 8. Access door (piping compartment) | 11. Manifold compartment |
| 3. Line burner | 6. Observation port | 9. Lifting lug | 12. TracRite air flow station (required for ETL listed Return Air Unit) |

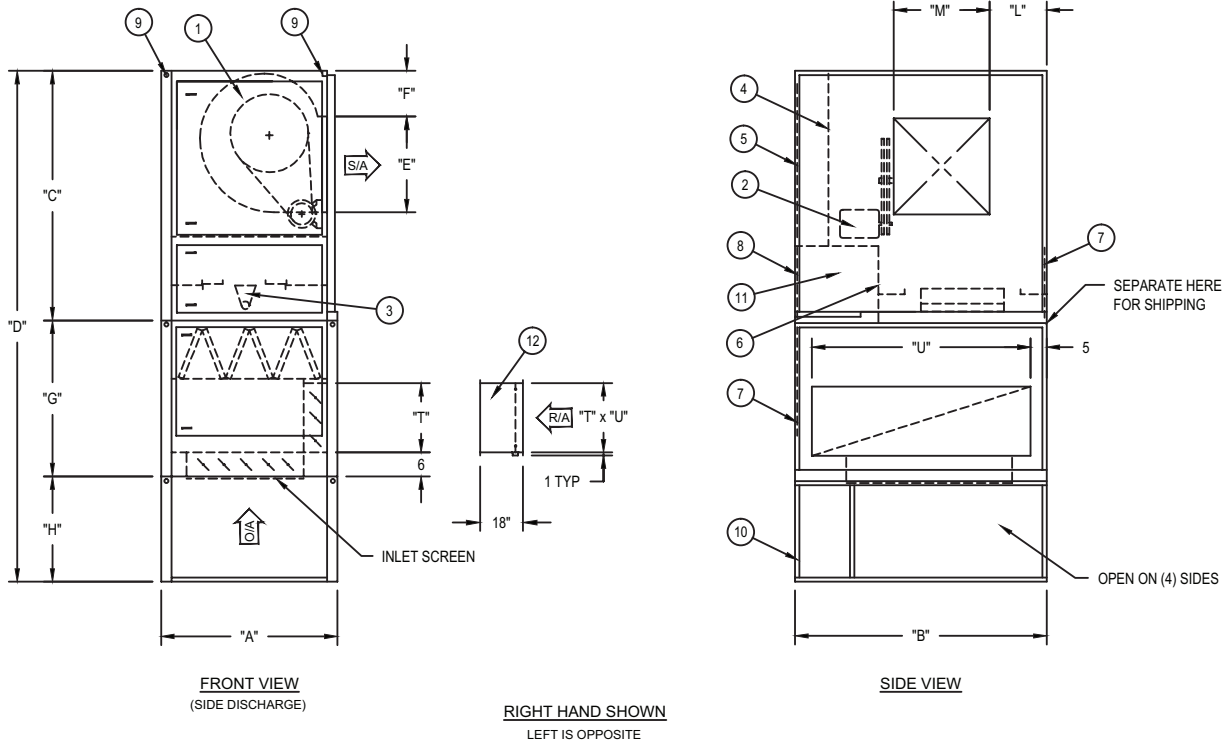

| Model | Dimensions | | | | | |
|-------|------------|----|----|-----|---------------------------------|---------------------------------|
| | A | B | C | D | E | F |
| 109 | 42 | 52 | 77 | 167 | 10 ⁵ / ₈ | 15 ⁵ / ₈ |
| 112 | 42 | 52 | 77 | 167 | 13 ³ / ₁₆ | 13 ³ / ₁₆ |
| 115 | 42 | 52 | 77 | 167 | 16 | 12 ³ / ₈ |
| 118 | 42 | 52 | 77 | 167 | 19 | 12 ³ / ₈ |
| 120 | 56 | 78 | 96 | 204 | 24 ⁷ / ₈ | 13 ³ / ₁₆ |
| 122 | 56 | 78 | 96 | 204 | 27 ³ / ₈ | 13 ³ / ₁₆ |
| 125 | 68 | 91 | 96 | 209 | 31 ³ / ₈ | 17 ⁷ / ₁₆ |
| 130 | 68 | 91 | 96 | 209 | 36 ⁷ / ₈ | 17 ⁷ / ₁₆ |

| Model | Dimensions | | | | | |
|-------|------------|----|--------------------------------|----------------------------------|--------------------------------|----|
| | G | H | L | M | T | U |
| 109 | 54 | 36 | 14 ¹ / ₂ | 11 ¹⁵ / ₁₆ | 20 ¹ / ₄ | 42 |
| 112 | 54 | 36 | 12 ¹ / ₂ | 15 ¹⁵ / ₁₆ | 20 ¹ / ₄ | 42 |
| 115 | 54 | 36 | 11 ¹ / ₈ | 18 ¹⁵ / ₁₆ | 20 ¹ / ₄ | 42 |
| 118 | 54 | 36 | 7 ⁷ / ₈ | 22 ¹ / ₁₆ | 20 ¹ / ₄ | 42 |
| 120 | 60 | 48 | 12 ³ / ₈ | 25 ¹ / ₁₆ | 20 ¹ / ₄ | 68 |
| 122 | 60 | 48 | 12 ³ / ₈ | 27 ⁹ / ₁₆ | 20 ¹ / ₄ | 68 |
| 125 | 65 | 48 | 15 ³ / ₈ | 31 ¹ / ₂ | 26 ¹ / ₂ | 81 |
| 130 | 65 | 48 | 15 ³ / ₈ | 37 | 26 ¹ / ₂ | 81 |

NOTE: All dimensions in inches subject to manufacturing tolerances.


Dimensions

Vertical Models — Sizes 215 Through 230

C000464A

UNIT COMPONENTS

- | | | | |
|---------------------------|---------------------------------------|-------------------------------------|--------------------------|
| 1. Centrifugal supply fan | 4. Control cabinet | 7. Access door | 10. Unit support stand |
| 2. Fan motor | 5. Hinged control cabinet access door | 8. Access door (piping compartment) | 11. Manifold compartment |
| 3. Line burner | 6. Observation port | 9. Lifting lug | |

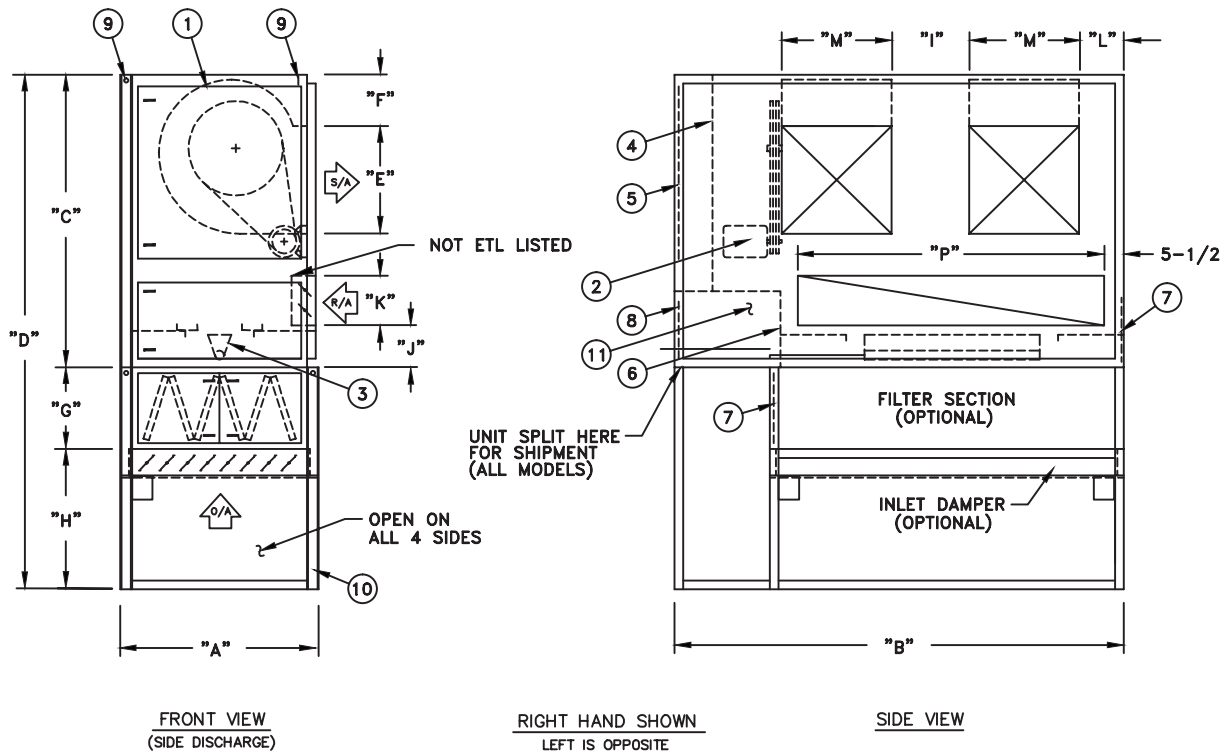

| Model | Dimensions | | | | | | | |
|-------|------------|-----|----|-----|--------------------------------|---------------------------------|----|----|
| | A | B | C | D | E | F | G | H |
| 215 | 42 | 94 | 77 | 135 | 16 | 12 ³ / ₈ | 22 | 36 |
| 218 | 42 | 94 | 77 | 135 | 19 | 12 ³ / ₈ | 22 | 36 |
| 220 | 56 | 130 | 96 | 166 | 24 ⁷ / ₈ | 13 ³ / ₁₆ | 22 | 48 |
| 222 | 56 | 130 | 96 | 166 | 27 ³ / ₈ | 13 ³ / ₁₆ | 22 | 48 |
| 225 | 68 | 154 | 96 | 172 | 31 ³ / ₈ | 17 ¹ / ₁₆ | 28 | 48 |
| 230 | 68 | 154 | 96 | 172 | 36 ⁷ / ₈ | 17 ¹ / ₁₆ | 28 | 48 |

| Model | Dimensions | | | | | |
|-------|--------------------------------|---------------------------------|--------------------------------|--------------------------------|----------------------------------|---------------------------------|
| | I | J | K | L | M | P |
| 215 | 22 ¹ / ₄ | 19 | 14 ¹ / ₄ | 7 ⁷ / ₈ | 18 ¹⁵ / ₁₆ | 65 ³ / ₄ |
| 218 | 16 | 19 | 14 ¹ / ₄ | 7 ⁷ / ₈ | 22 ¹ / ₁₆ | 65 ³ / ₄ |
| 220 | 29 ³ / ₈ | 19 | 14 ¹ / ₄ | 12 ³ / ₈ | 25 ¹ / ₁₆ | 87 ³ / ₈ |
| 222 | 24 ³ / ₈ | 19 | 14 ¹ / ₄ | 12 ³ / ₈ | 27 ¹ / ₁₆ | 87 ³ / ₈ |
| 225 | 37 ³ / ₈ | 12 ² / ₁₆ | 20 ¹ / ₄ | 15 ³ / ₈ | 31 ¹ / ₂ | 111 ³ / ₈ |
| 230 | 26 ³ / ₈ | 12 ² / ₁₆ | 20 ¹ / ₄ | 15 ³ / ₈ | 37 | 111 ³ / ₈ |

NOTE: All dimensions in inches subject to manufacturing tolerances.



Dimensions

Vertical Models — Sizes 215 Through 230 with Mixing Box

C000551C

UNIT COMPONENTS

- | | | | |
|---------------------------|---------------------------------------|-------------------------------------|---|
| 1. Centrifugal supply fan | 4. Control cabinet | 7. Access door | 10. Unit support stand |
| 2. Fan motor | 5. Hinged control cabinet access door | 8. Access door (piping compartment) | 11. Manifold compartment |
| 3. Line burner | 6. Observation port | 9. Lifting lug | 12. TracRite air flow station (required for ETL listed Return Air Unit) |

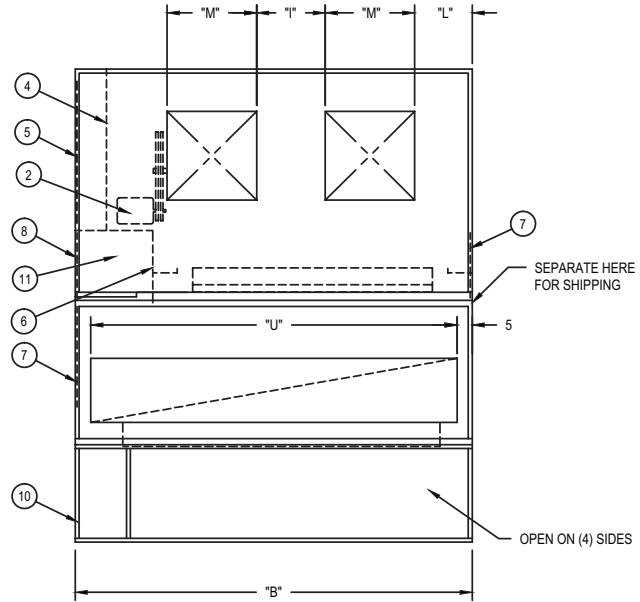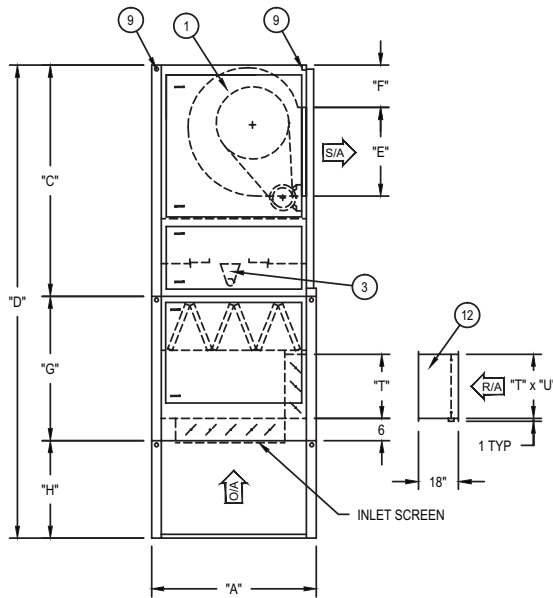

RIGHT HAND SHOWN
LEFT IS OPPOSITE

| Model | Dimensions | | | | | | |
|-------|------------|-----|----|-----|--------------------------------|---------------------------------|----|
| | A | B | C | D | E | F | G |
| 215 | 42 | 94 | 77 | 167 | 16 | 12 ³ / ₈ | 54 |
| 218 | 42 | 94 | 77 | 167 | 19 | 12 ³ / ₈ | 54 |
| 220 | 56 | 130 | 96 | 204 | 24 ⁷ / ₈ | 13 ³ / ₁₆ | 60 |
| 222 | 56 | 130 | 96 | 204 | 27 ³ / ₈ | 13 ³ / ₁₆ | 60 |
| 225 | 68 | 154 | 96 | 209 | 31 ³ / ₈ | 17 ¹ / ₁₆ | 65 |
| 230 | 68 | 154 | 96 | 209 | 36 ⁷ / ₈ | 17 ¹ / ₁₆ | 65 |

| Model | Dimensions | | | | | |
|-------|------------|--------------------------------|--------------------------------|----------------------------------|--------------------------------|-----|
| | H | I | L | M | T | U |
| 215 | 36 | 22 ¹ / ₄ | 7 ⁷ / ₈ | 18 ¹⁵ / ₁₆ | 20 ¹ / ₄ | 84 |
| 218 | 36 | 16 | 7 ⁷ / ₈ | 22 ¹ / ₁₆ | 20 ¹ / ₄ | 84 |
| 220 | 48 | 29 ³ / ₈ | 12 ³ / ₈ | 25 ¹ / ₁₆ | 20 ¹ / ₄ | 120 |
| 222 | 48 | 24 ³ / ₈ | 12 ³ / ₈ | 27 ¹ / ₁₆ | 20 ¹ / ₄ | 120 |
| 225 | 48 | 37 ³ / ₈ | 15 ³ / ₈ | 31 ¹ / ₂ | 26 ¹ / ₂ | 144 |
| 230 | 48 | 26 ³ / ₈ | 15 ³ / ₈ | 37 | 26 ¹ / ₂ | 144 |

NOTE: All dimensions in inches subject to manufacturing tolerances.


Dimensions

Vertical Models — Sizes 233 and 240

C000463

UNIT COMPONENTS

- | | | | |
|---------------------------|---------------------------------------|-------------------------------------|--------------------------|
| 1. Centrifugal supply fan | 4. Control cabinet | 7. Access door | 10. Unit support stand |
| 2. Fan motor | 5. Hinged control cabinet access door | 8. Access door (piping compartment) | 11. Manifold compartment |
| 3. Line burner | 6. Observation port | 9. Lifting lug | |

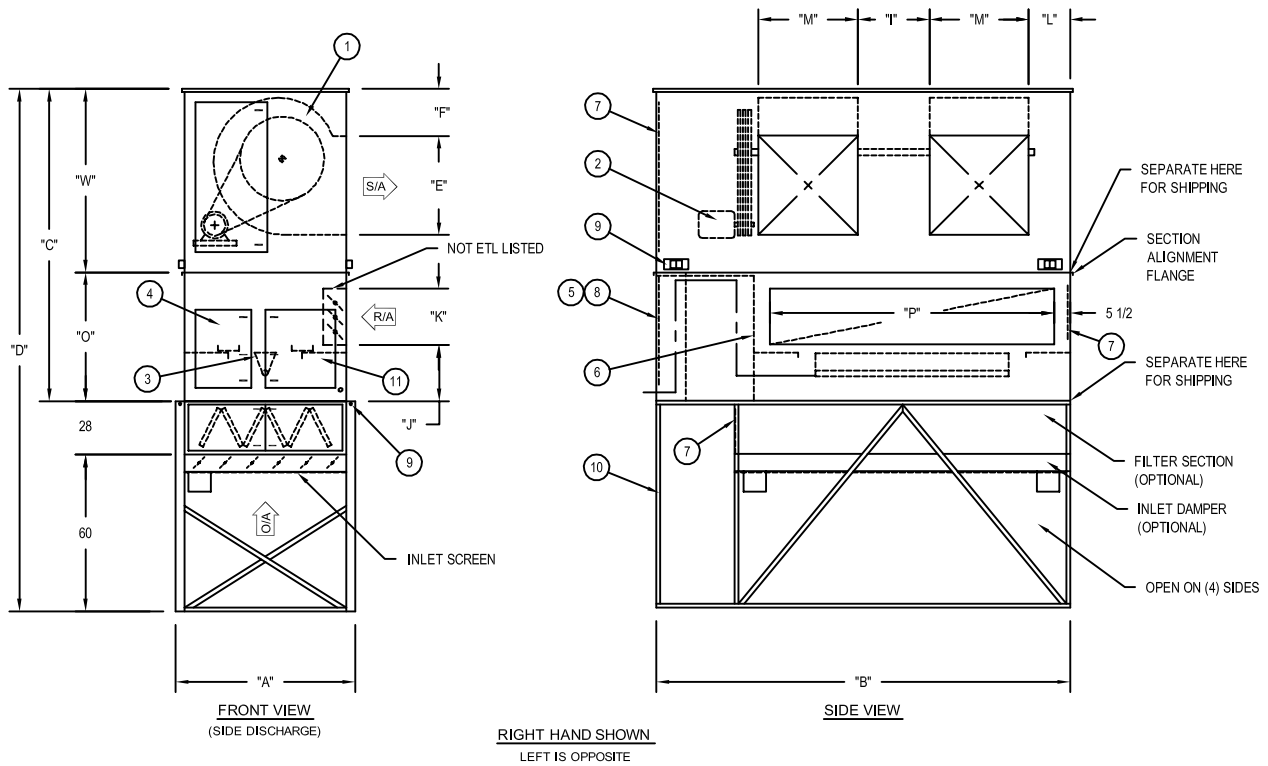

| Model | Dimensions | | | | | | |
|-------|--------------------------------|--------------------------------|-----|--------------------------------|---------------------------------|---------------------------------|--------------------------------|
| | A | B | C | D | E | F | I |
| 233 | 76 | 175 | 117 | 205 | 43 ¹ / ₁₆ | 19 ⁷ / ₁₆ | 36 |
| 240 | 87 ¹ / ₄ | 210 | 131 | 219 | 41 | 33 | 39 ⁷ / ₈ |
| Model | Dimensions | | | | | | |
| | J | K | L | M | O | P | W |
| 233 | 20 | 20 ¹ / ₄ | 17 | 39 ⁷ / ₈ | 45 | 130 | 72 |
| 240 | 20 | 20 ¹ / ₄ | 20 | 53 ⁷ / ₈ | 45 | 166 | 86 |

NOTE: All dimensions in inches subject to manufacturing tolerances.


Dimensions

Vertical Models — Sizes 233 and 240 with Mixing Box

C000549A

UNIT COMPONENTS

- | | | | |
|---------------------------|---------------------------------------|-------------------------------------|---|
| 1. Centrifugal supply fan | 4. Control cabinet | 7. Access door | 10. Unit support stand |
| 2. Fan motor | 5. Hinged control cabinet access door | 8. Access door (piping compartment) | 11. Manifold compartment |
| 3. Line burner | 6. Observation port | 9. Lifting lug | 12. Return air flow station (required for ETL listed Return Air Unit) |

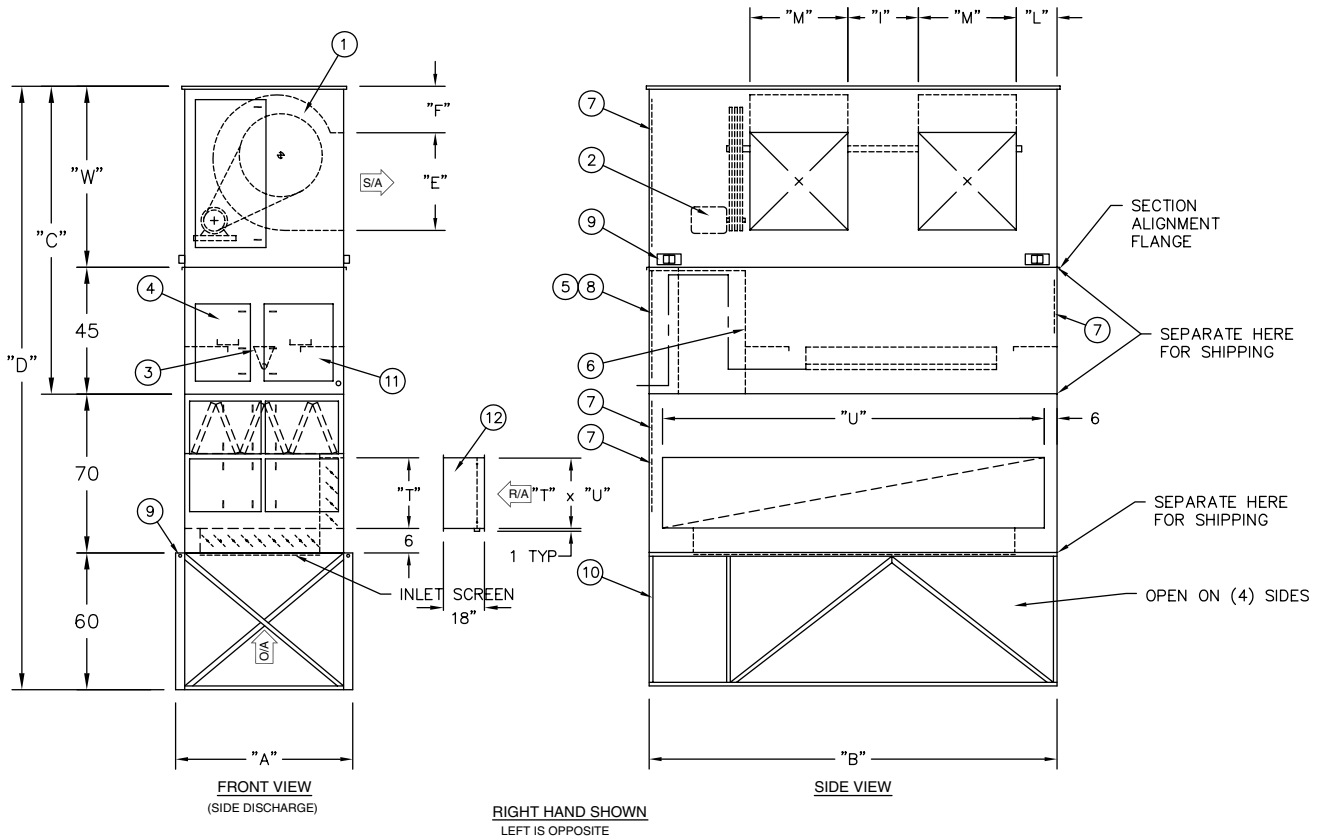


| Model | Dimensions | | | | | |
|-------|--------------------------------|-----|--------------------------------|--------------------------------|---------------------------------|---------------------------------|
| | A | B | C | D | E | F |
| 233 | 76 | 175 | 117 | 247 | 43 ¹ / ₁₆ | 19 ¹ / ₁₆ |
| 240 | 87 ¹ / ₄ | 210 | 131 | 261 | 41 | 33 |
| Model | Dimensions | | | | | |
| | I | L | M | T | U | W |
| 233 | 36 | 17 | 39 ⁵ / ₈ | 31 ¹ / ₄ | 163 | 72 |
| 240 | 39 ⁵ / ₈ | 20 | 58 ⁵ / ₈ | 31 ¹ / ₄ | 198 | 86 |

NOTE: All dimensions in inches subject to manufacturing tolerances.

Dimensions

V-Bank Filter and Filter Information

C000469

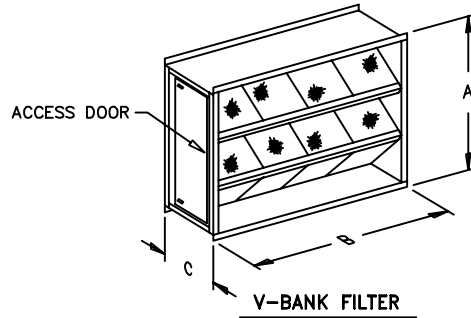


| Dimension | MODEL | | | | | | | | | | |
|-----------|---------|---------|-----|-----|-----|-----|---------|---------|---------|------|-----|
| | 109-112 | 115-118 | 120 | 122 | 125 | 130 | 215-218 | 220-222 | 225-230 | 233 | 240 |
| A | 36 | 36 | 48 | 48 | 60 | 60 | 36 | 48 | 60 | 68 | 79¼ |
| B | 47¼ | 47¼ | 62¾ | 62¾ | 63 | 63 | 91½ | 101¾ | 121¾ | 141½ | 177 |
| C | 22 | 22 | 22 | 22 | 28 | 28 | 22 | 22 | 28 | 28 | 28 |

| Model | 109-112 | 115-118 | 120-122 | 125-130 | 215-218 | 220-222 | 225-230 | 233 | 240 |
|--------------------|--------------------|--------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Filter Qty. & Size | (9) 15 x 20 x 2 | (9) 15 x 20 x 2 | (15) 20 x 20 x 2 | (18) 20 x 25 x 2 | (18) 15 x 20 x 2 | (25) 20 x 20 x 2 | (36) 20 x 25 x 2 | (49) 20 x 25 x 2 | (88) 16 x 25 x 2 |


NOTE: All dimensions in inches subject to manufacturing tolerances.

Mixing Box and Filter Information

C000469

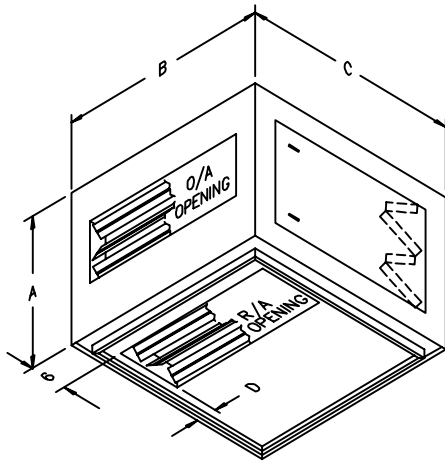

MIXING BOX

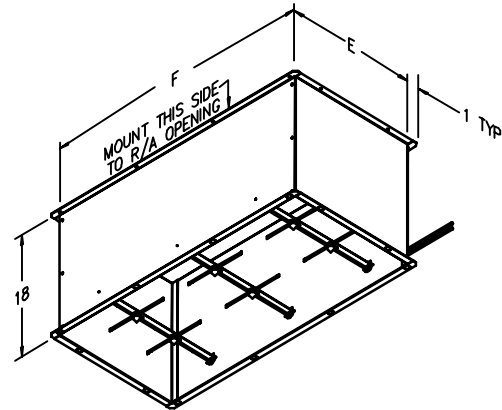

RETURN AIR FLOW STATION

| Dimension | Model | | | | | | | | | | |
|-----------|---------|---------|-----|-----|-----|-----|---------|---------|---------|-----|-----|
| | 109-112 | 115-118 | 120 | 122 | 125 | 130 | 215-218 | 220-222 | 225-230 | 233 | 240 |
| A | 36 | 36 | 48 | 48 | 60 | 60 | 36 | 48 | 60 | 68 | 79¼ |
| B | 52 | 52 | 78 | 78 | 91 | 91 | 94 | 130 | 154 | 175 | 210 |
| C | 54 | 54 | 60 | 60 | 65 | 65 | 54 | 60 | 65 | 70 | 70 |
| D | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 6 | 6 |
| E | 20¼ | 20¼ | 20¼ | 20¼ | 26½ | 26½ | 20¼ | 20¼ | 26½ | 31¼ | 31¼ |
| F | 42 | 42 | 68 | 68 | 81 | 81 | 84 | 120 | 144 | 163 | 198 |



| Model | 109-118 | 120 | 122 | 125 | 130 | 215-218 | 220-222 | 225-230 | 233 | 240 |
|------------|----------|----------|----------|----------|----------|----------|-----------|-----------|-----------|-----------|
| R/A - I.D. | 42 x 20¼ | 68 x 20¼ | 68 x 20¼ | 81 x 26½ | 81 x 26½ | 84 x 20¼ | 120 x 20¼ | 144 x 26½ | 163 x 31¼ | 198 x 31¼ |
| O/A - I.D. | 42 x 20¼ | 44 x 32¼ | 44 x 32¼ | 51 x 44¼ | 51 x 44¼ | 84 x 20¼ | 96 x 32¼ | 114 x 44¼ | 130 x 52 | 165 x 52 |

NOTES: 1) Refer to V-bank information above for filter quantity and size.
2) All dimensions in inches subject to manufacturing tolerances.

Dimensions

Dampers

C000468

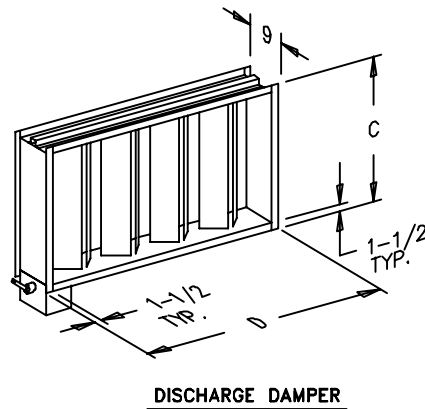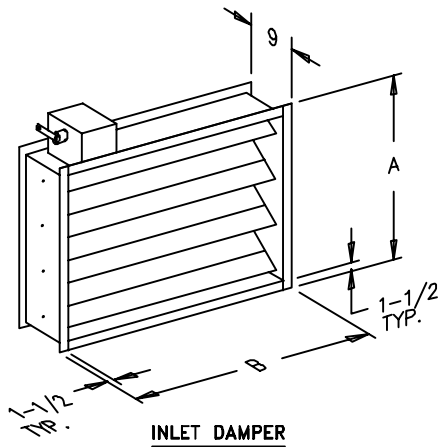



| Dimension | Model | | | | | | | | |
|-----------|---------|---------|---------|---------|---------|---------|---------|------|------|
| | 109-112 | 115-118 | 120-122 | 125-130 | 215-218 | 220-222 | 225-230 | 233 | 240* |
| A | 36 | 36 | 48 | 60 | 36 | 48 | 60 | 68 | 79¼ |
| B | 47¼ | 47¼ | 62¾ | 63 | 91½ | 101⅝ | 121⅝ | 141½ | 177 |
| C | 17⅞ | 22⅞ | 31¼ | 40¾ | 22⅞ | 31¼ | 40¾ | 47 | 45 |
| D | 20⅜ | 26⅜ | 32½ | 41⅞ | 64⅞ | 84½ | 105⅝ | 120⅞ | 58¾ |

*On 240 discharge damper ONLY, there are two (2) dampers side by side. Dimensions shown are for each damper. Overall width of 240 discharge damper is 152½".

NOTE: All dimensions in inches subject to manufacturing tolerances.

Discharge Louvers

C000468

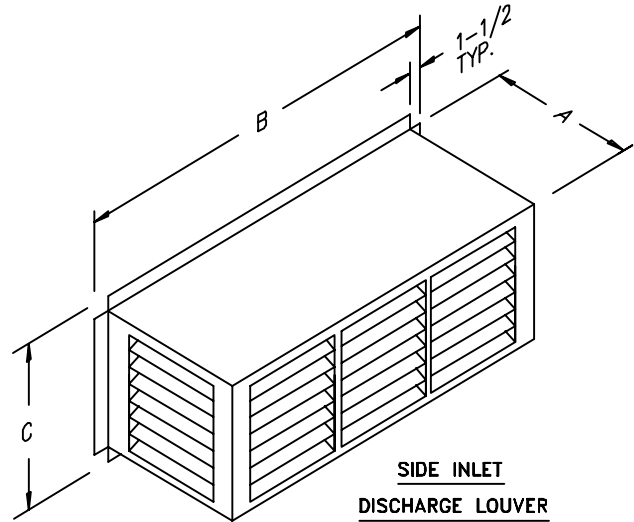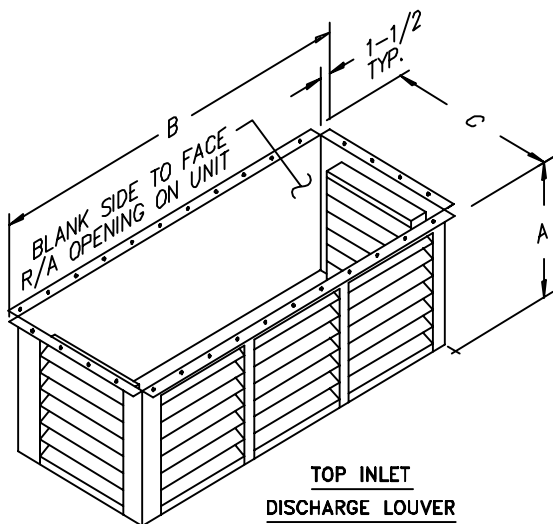


| Dimension | Model | | | | | | | | |
|-----------|---------|---------|---------|---------|---------|---------|---------|------|------|
| | 109-112 | 115-118 | 120-122 | 125-130 | 215-218 | 220-222 | 225-230 | 233 | 240 |
| A | 21 | 24 | 45 | 45 | 24 | 45 | 45 | 45 | 45 |
| B | 20⅜ | 26⅜ | 32½ | 41⅞ | 64⅞ | 84½ | 105⅝ | 120⅞ | 152½ |
| C | 17⅞ | 23 | 31¼ | 40¾ | 23 | 31¼ | 40¾ | 47 | 45 |

NOTE: All dimensions in inches subject to manufacturing tolerances.


Dimensions

Intake Hoods and Filter Information


C000482A




FOR MODELS 109-112



FOR MODELS 115-118, 120-122, 215-218, 220-222

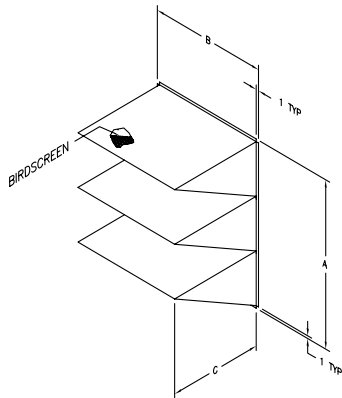

FOR MODELS 125-130, 225-230, 233

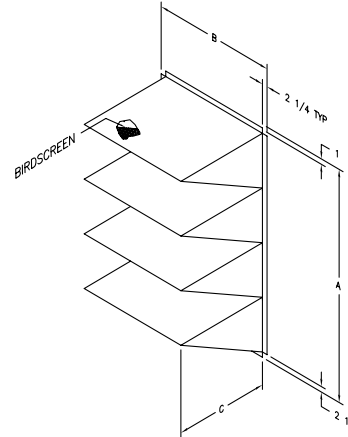

FOR MODEL 240



| Dimension | Model | | | | | | | | |
|--------------------|------------------|------------------|------------------|-----------------|------------------|-------------------|-------------------|-------------------|------------------|
| | 109-112 | 115-118 | 120-122 | 125-130 | 215-218 | 220-222 | 225-230 | 233 | 240 |
| A | 36 | 36 | 48 | 60 | 36 | 48 | 60 | 68 | 79 |
| B | 47 $\frac{1}{4}$ | 47 $\frac{1}{4}$ | 62 $\frac{3}{8}$ | 63 | 91 $\frac{1}{2}$ | 101 $\frac{5}{8}$ | 121 $\frac{3}{8}$ | 140 $\frac{1}{2}$ | 177 |
| C | 32 | 32 | 38 $\frac{1}{2}$ | 53 | 32 | 44 $\frac{1}{2}$ | 56 $\frac{1}{2}$ | 56 $\frac{1}{2}$ | 51 $\frac{1}{2}$ |
| Filter Qty. & Size | (4) 16 x 20 | (8) 16 x 20 | (12) 20 x 20 | (30) 15 x 20 | (16) 16 x 20 | (18) 20 x 25 | (66) 15 x 20 | (75) 15 x 20 | (64) 20 x 25 |

NOTE: All dimensions in inches subject to manufacturing tolerances.

Dimensions

Cooling Coil Section

P000882

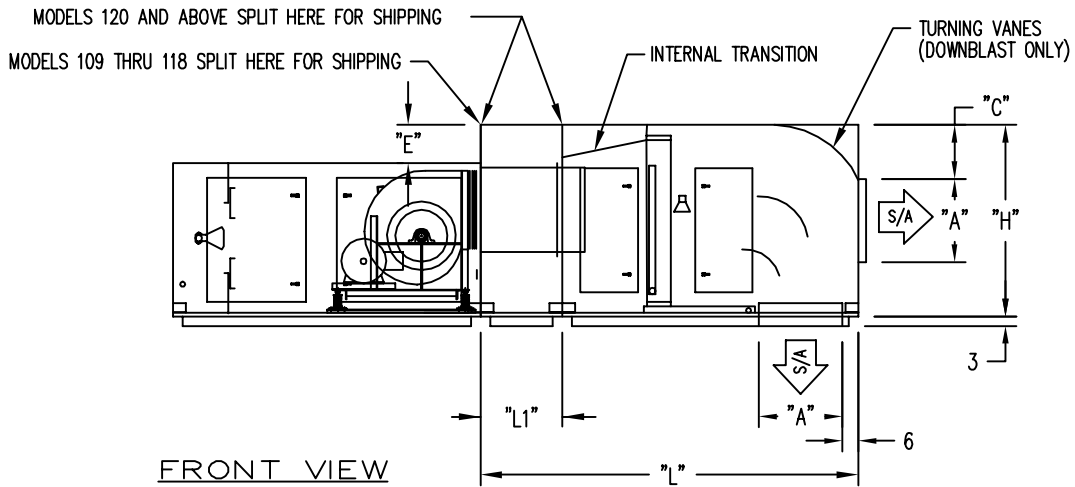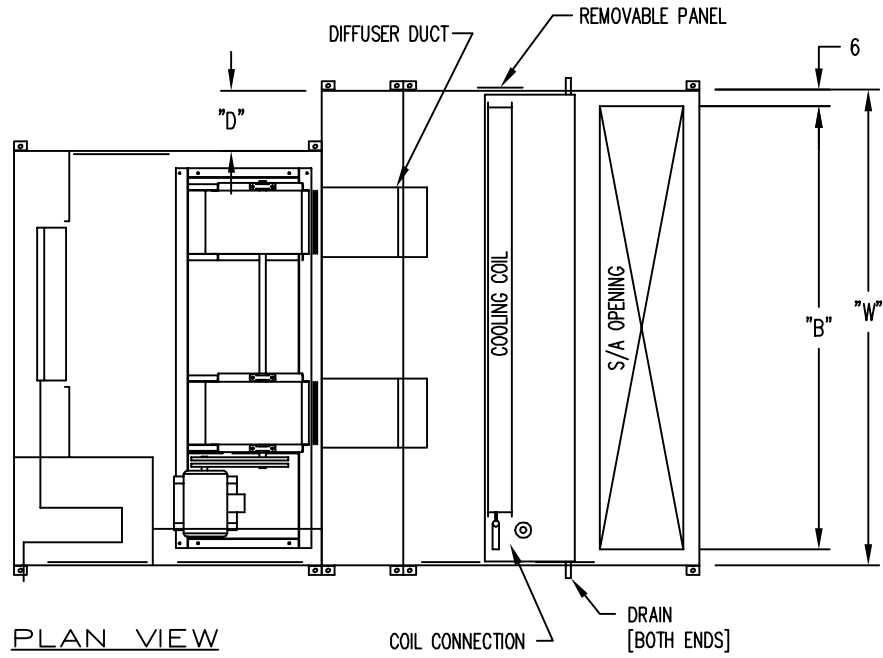

Notes:

1. Shipped separate and assembled in the field.
2. Dual blower unit shown, single blower unit similar.

| Model | Dimensions | | | | | | | | | Max Coil Size FH x FL |
|---------|------------|----|-----|----|-----|-----|----|----|----|--------------------------|
| | L | L1 | W | H | A | B | C | D | E | |
| 109-112 | 82 | — | 52 | 42 | 18 | 40 | 12 | 0 | 6 | 33 x 40 |
| 115-118 | 110 | — | 64 | 60 | 18 | 52 | 21 | 12 | 24 | 51 x 51 |
| 120-122 | 124 | 24 | 98 | 60 | 26 | 86 | 23 | 20 | 12 | 51 x 85 |
| 125-130 | 156 | 56 | 116 | 93 | 34½ | 104 | 29 | 25 | 33 | 84 x 103 |
| 215-218 | 110 | 17 | 106 | 60 | 18 | 94 | 21 | 12 | 24 | 51 x 93 |
| 220-222 | 124 | 24 | 154 | 72 | 26 | 142 | 23 | 24 | 24 | 63 x 141 |
| 225-230 | 156 | 56 | 179 | 93 | 34½ | 167 | 29 | 25 | 33 | 84 x 166 @ 50,000 |
| 233 | — | — | — | — | — | — | — | — | — | N/A |
| 240 | — | — | — | — | — | — | — | — | — | N/A |


NOTE: All dimensions in inches subject to manufacturing tolerances.

Dimensions


5F and 5R Discharge Dimensions and Weights

C000781

FIXED AND REVOLVING DISCHARGES TYPE 5F AND 5R FOR DIRECT FIRED VERTICAL DOWN BLAST UNITS

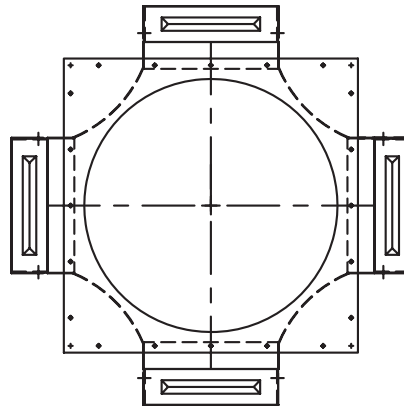

PLAN VIEW

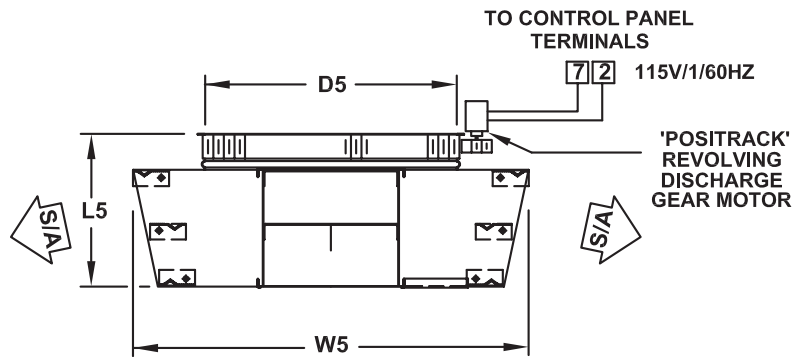

SIDE ELEVATION

5F AND 5R DISCHARGES

A FOUR OUTLET DISCHARGE DESIGNED FOR FULL AIR DISTRIBUTION.

DISCHARGE VANES ARE ADJUSTABLE.

DISCHARGE DESIGNED FOR LOW CEILING HEIGHT APPLICATIONS.

Dimensions

5F and 5R Discharge Dimensions and Weights

| DISCHARGE DIMENSIONS AND WEIGHT | | | | | | |
|---------------------------------|----------------|---------------------|--------|--------|-----------|-----------|
| Model Size | Discharge Size | 5F and 5R Discharge | | | | |
| | | D5 | L5 | W5 | Weight 5F | Weight 5R |
| 109 | 17 | 17-23/32 | 9-1/4 | 25-1/2 | 45 | 100 |
| 112 | 22 | 25-23/32 | 11 | 34-1/2 | 60 | 110 |
| 115 | 25 | 31-5/32 | 14 | 40 | 65 | 120 |
| 118 | 28 | 36-17/32 | 16-5/8 | 50 | 90 | 160 |
| 120 | 36 | 42-17/32 | 18-1/4 | 57 | 110 | 185 |
| 122 | 40 | 49-17/32 | 20-1/8 | 66-1/2 | 120 | 200 |
| 125 | 44 | 49-17/32 | 22 | 66-1/2 | 160 | 245 |
| 130 | 44 | 49-17/32 | 22 | 66-1/2 | 160 | 245 |
| 215 | 36 | 42-17/32 | 18-1/4 | 57 | 110 | 185 |
| 218 | 40 | 49-17/32 | 20-1/8 | 66-1/2 | 120 | 200 |
| 220 | 44 | 49-17/32 | 22 | 66-1/2 | 160 | 245 |
| 222 | 44 | 49-17/32 | 22 | 66-1/2 | 160 | 245 |
| 225 | 44 | 49-17/32 | 22 | 66-1/2 | 160 | 245 |

NOTES:


1. All dimensions are in inches.
2. All weights are in pounds.

Dimensions


8F and 8R Discharge Dimensions and Weights

C000782


FIXED AND REVOLVING DISCHARGES TYPE 8F AND 8R FOR DIRECT FIRED VERTICAL DOWN BLAST UNITS

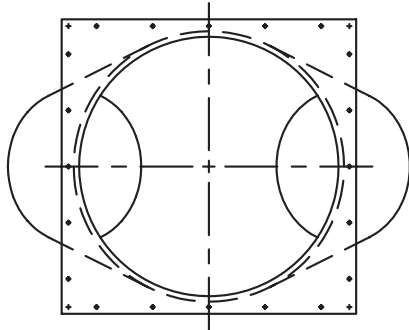

PLAN VIEW

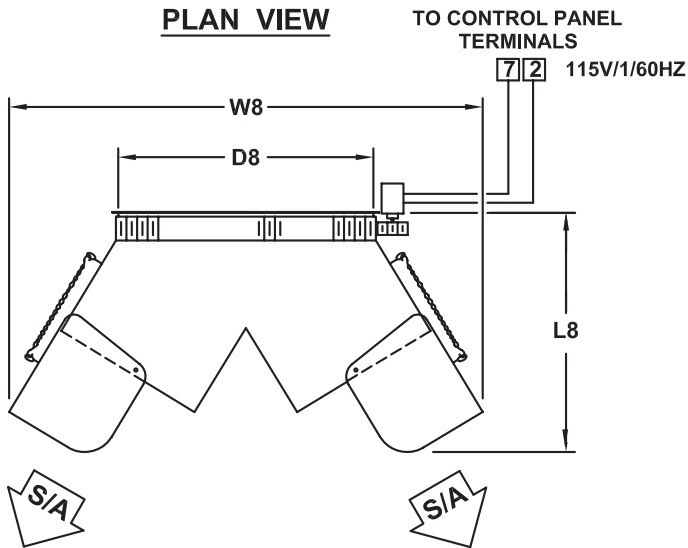

SIDE ELEVATION

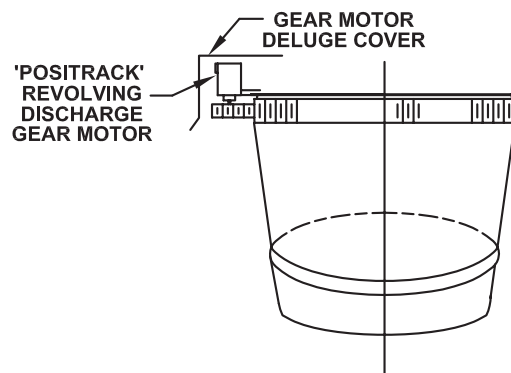

END ELEVATION

8F AND 8R DISCHARGE
A TWO OUTLET DISCHARGE DESIGNED
FOR FULL AIR DISTRIBUTION.
DISCHARGE DESIGNED FOR
HIGH MOUNTING APPLICATIONS.

Dimensions

8F and 8R Discharge Dimensions and Weights

| DISCHARGE DIMENSIONS AND WEIGHT | | | | | | |
|---------------------------------|----------------|---------------------|---------|--------|-----------|-----------|
| Model Size | Discharge Size | 8F and 8R Discharge | | | | |
| | | D8 | L8 | W8 | Weight 8F | Weight 8R |
| 109 | 22 | 25-23/32 | 29-7/8 | 47-1/2 | 80 | 100 |
| 112 | 22 | 25-23/32 | 29-7/8 | 47-1/2 | 80 | 100 |
| 115 | 22 | 25-23/32 | 29-7/8 | 47-1/2 | 80 | 100 |
| 118 | 28 | 36-17/32 | 35-1/2 | 64 | 100 | 125 |
| 120 | 36 | 42-17/32 | 47-1/16 | 77 | 120 | 145 |
| 122 | 40 | 49-17/32 | 54-9/16 | 89-1/2 | 140 | 165 |
| 125 | 44 | 49-17/32 | 53-7/16 | 86 | 160 | 195 |
| 130 | 44 | 49-17/32 | 53-7/16 | 86 | 160 | 195 |
| 215 | 36 | 42-17/32 | 47-1/16 | 77 | 120 | 145 |
| 218 | 40 | 49-17/32 | 54-9/16 | 89-1/2 | 140 | 165 |
| 220 | 44 | 49-17/32 | 53-7/16 | 86 | 160 | 195 |
| 222 | 44 | 49-17/32 | 53-7/16 | 86 | 160 | 195 |
| 225 | 44 | 49-17/32 | 53-7/16 | 86 | 160 | 195 |

NOTES:

1. All dimensions are in inches.
2. All weights are in pounds.

Discharge Options

| 5F and 5R Discharge Pressure Drop and Coverage | | | | | | |
|--|-------|----------------|-------------------|-----------------|----------------|--------------------|
| Model | SCFM | Discharge Size | Air Pressure Drop | Mounting Height | Fixed Coverage | Revolving Coverage |
| 109 | 1600 | 17 | 0.05 | 9 | 58 x 58 | 58 x 58 |
| | 1800 | | 0.06 | 9 | 59 x 59 | 59 x 59 |
| | 2000 | | 0.07 | 10 | 61 x 61 | 61 x 61 |
| | 2250 | | 0.09 | 10 | 63 x 63 | 63 x 63 |
| | 2500 | | 0.11 | 10 | 65 x 65 | 65 x 65 |
| | 2750 | | 0.13 | 11 | 67 x 67 | 67 x 67 |
| | 3000 | | 0.16 | 11 | 69 x 69 | 69 x 69 |
| 112 | 3250 | 22 | 0.06 | 13 | 75 x 75 | 75 x 75 |
| | 3500 | | 0.07 | 13 | 76 x 76 | 76 x 76 |
| | 3750 | | 0.09 | 14 | 77 x 77 | 77 x 77 |
| | 4000 | | 0.10 | 14 | 77 x 77 | 77 x 77 |
| | 4250 | | 0.11 | 14 | 78 x 78 | 78 x 78 |
| 115 | 4500 | 25 | 0.06 | 13 | 86 x 86 | 86 x 86 |
| | 5000 | | 0.07 | 13 | 87 x 87 | 87 x 87 |
| | 5500 | | 0.08 | 14 | 89 x 89 | 89 x 89 |
| | 6000 | | 0.10 | 14 | 90 x 90 | 90 x 90 |
| 118 | 6500 | 28 | 0.07 | 14 | 92 x 92 | 92 x 92 |
| | 7000 | | 0.08 | 15 | 96 x 96 | 96 x 96 |
| | 7500 | | 0.09 | 15 | 101 x 101 | 101 x 101 |
| | 8000 | | 0.10 | 16 | 105 x 105 | 105 x 105 |
| | 8500 | | 0.11 | 16 | 109 x 109 | 109 x 109 |
| 120 | 9000 | 36 | 0.06 | 14 | 92 x 92 | 92 x 92 |
| | 9500 | | 0.07 | 15 | 100 x 100 | 100 x 100 |
| | 10000 | | 0.07 | 16 | 107 x 107 | 107 x 107 |
| | 10500 | | 0.08 | 16 | 115 x 115 | 115 x 115 |
| | 11000 | | 0.09 | 17 | 122 x 122 | 122 x 122 |
| 122 | 11000 | 40 | 0.05 | 17 | 122 x 122 | 122 x 122 |
| | 12000 | | 0.06 | 18 | 125 x 125 | 125 x 125 |
| | 13000 | | 0.07 | 18 | 127 x 127 | 127 x 127 |
| | 14000 | | 0.08 | 19 | 130 x 130 | 130 x 130 |
| | 15000 | | 0.09 | 19 | 132 x 132 | 132 x 132 |
| 125 | 14000 | 44 | 0.05 | 18 | 129 x 129 | 129 x 129 |
| | 15000 | | 0.06 | 19 | 132 x 132 | 132 x 132 |
| | 16000 | | 0.07 | 20 | 134 x 134 | 134 x 134 |
| | 18000 | | 0.09 | 21 | 140 x 140 | 140 x 140 |
| | 20000 | | 0.11 | 23 | 145 x 145 | 145 x 145 |
| 130 | 22000 | 44 | 0.13 | 19 | 132 x 132 | 132 x 132 |
| | 24000 | | 0.16 | 21 | 137 x 137 | 137 x 137 |
| | 26000 | | 0.19 | 22 | 141 x 141 | 141 x 141 |
| | 28000 | | 0.22 | 24 | 146 x 146 | 146 x 146 |
| | 30000 | | 0.25 | 25 | 150 x 150 | 150 x 150 |

Discharge Options

| 5F and 5R Discharge Pressure Drop and Coverage | | | | | | |
|--|-------|----------------|-------------------|-----------------|----------------|--------------------|
| Model | SCFM | Discharge Size | Air Pressure Drop | Mounting Height | Fixed Coverage | Revolving Coverage |
| 215 | 9000 | 36 | 0.06 | 16 | 109 x 109 | 109 x 109 |
| | 9500 | | 0.07 | 16 | 111 x 111 | 111 x 111 |
| | 10000 | | 0.07 | 17 | 114 x 114 | 114 x 114 |
| | 10500 | | 0.08 | 17 | 116 x 116 | 116 x 116 |
| | 11000 | | 0.09 | 17 | 118 x 118 | 118 x 118 |
| | 11500 | | 0.10 | 18 | 121 x 121 | 121 x 121 |
| | 12000 | | 0.11 | 18 | 123 x 123 | 123 x 123 |
| 218 | 12500 | 40 | 0.07 | 18 | 123 x 123 | 123 x 123 |
| | 13000 | | 0.07 | 18 | 124 x 124 | 124 x 124 |
| | 14000 | | 0.08 | 18 | 126 x 126 | 126 x 126 |
| | 15000 | | 0.10 | 19 | 128 x 128 | 128 x 128 |
| | 16000 | | 0.11 | 19 | 130 x 130 | 130 x 130 |
| | 17000 | | 0.12 | 19 | 132 x 132 | 132 x 132 |
| 220 | 18000 | 44 | 0.09 | 22 | 135 x 135 | 135 x 135 |
| | 19000 | | 0.10 | 23 | 139 x 139 | 139 x 139 |
| | 20000 | | 0.11 | 23 | 142 x 142 | 142 x 142 |
| | 21000 | | 0.12 | 24 | 146 x 146 | 146 x 146 |
| | 22000 | | 0.14 | 25 | 150 x 150 | 150 x 150 |
| | 23000 | | 0.15 | 25 | 153 x 153 | 153 x 153 |
| | 24000 | | 0.16 | 26 | 157 x 157 | 157 x 157 |
| | 25000 | | 0.18 | 26 | 160 x 160 | 160 x 160 |
| | 26000 | | 0.19 | 27 | 164 x 164 | 164 x 164 |
| 222 | 25000 | 44 | 0.18 | 27 | 160 x 160 | 160 x 160 |
| | 26000 | | 0.19 | 27 | 163 x 163 | 163 x 163 |
| | 27000 | | 0.21 | 28 | 166 x 166 | 166 x 166 |
| | 28000 | | 0.22 | 28 | 169 x 169 | 169 x 169 |
| | 29000 | | 0.24 | 28 | 171 x 171 | 171 x 171 |
| | 30000 | | 0.25 | 29 | 174 x 174 | 174 x 174 |
| | 31000 | | 0.27 | 29 | 177 x 177 | 177 x 177 |
| 225 | 30000 | 44 | 0.25 | 28 | 170 x 170 | 170 x 170 |
| | 32000 | | 0.29 | 29 | 176 x 176 | 176 x 176 |
| | 34000 | | 0.33 | 30 | 184 x 184 | 184 x 184 |
| | 36000 | | 0.36 | 30 | 187 x 187 | 187 x 187 |
| | 38000 | | 0.41 | 31 | 192 x 192 | 192 x 192 |
| | 40000 | | 0.45 | 32 | 198 x 198 | 198 x 198 |

Discharge Options

| 8F and 8R Discharge Pressure Drop and Coverage | | | | | | |
|--|-------|----------------|-------------------|-----------------|----------------|--------------------|
| Model | SCFM | Discharge Size | Air Pressure Drop | Mounting Height | Fixed Coverage | Revolving Coverage |
| 109 | 1600 | 22 | 0.03 | 14 | 24 x 47 | 47 x 47 |
| | 1800 | | 0.04 | 14 | 25 x 50 | 50 x 50 |
| | 2000 | | 0.05 | 15 | 27 x 53 | 53 x 53 |
| | 2250 | | 0.07 | 16 | 28 x 56 | 56 x 56 |
| | 2500 | | 0.08 | 17 | 30 x 59 | 59 x 59 |
| | 2750 | | 0.10 | 17 | 31 x 63 | 63 x 63 |
| | 3000 | | 0.12 | 18 | 33 x 66 | 66 x 66 |
| 112 | 3250 | 22 | 0.14 | 18 | 33 x 66 | 66 x 66 |
| | 3500 | | 0.17 | 19 | 34 x 68 | 68 x 68 |
| | 3750 | | 0.19 | 19 | 36 x 71 | 71 x 71 |
| | 4000 | | 0.22 | 20 | 37 x 73 | 73 x 73 |
| | 4250 | | 0.25 | 20 | 38 x 75 | 75 x 75 |
| 115 | 4500 | 22 | 0.28 | 20 | 39 x 78 | 78 x 78 |
| | 5000 | | 0.34 | 21 | 40 x 79 | 79 x 79 |
| | 5500 | | 0.41 | 22 | 40 x 80 | 80 x 80 |
| | 6000 | | 0.49 | 23 | 41 x 81 | 81 x 81 |
| 118 | 6500 | 28 | 0.17 | 26 | 42 x 84 | 84 x 84 |
| | 7000 | | 0.20 | 27 | 44 x 87 | 87 x 87 |
| | 7500 | | 0.23 | 28 | 45 x 90 | 90 x 90 |
| | 8000 | | 0.26 | 28 | 47 x 92 | 92 x 92 |
| | 8500 | | 0.29 | 29 | 48 x 95 | 95 x 95 |
| 120 | 9000 | 36 | 0.18 | 30 | 49 x 97 | 97 x 97 |
| | 9500 | | 0.20 | 31 | 51 x 100 | 100 x 100 |
| | 10000 | | 0.22 | 33 | 52 x 104 | 104 x 104 |
| | 10500 | | 0.25 | 34 | 54 x 107 | 107 x 107 |
| | 11000 | | 0.27 | 35 | 55 x 110 | 110 x 110 |
| 122 | 11000 | 40 | 0.14 | 35 | 55 x 110 | 110 x 110 |
| | 12000 | | 0.17 | 37 | 56 x 112 | 112 x 112 |
| | 13000 | | 0.20 | 39 | 57 x 113 | 113 x 113 |
| | 14000 | | 0.23 | 41 | 57 x 115 | 115 x 115 |
| | 15000 | | 0.26 | 43 | 58 x 116 | 116 x 116 |
| 125 | 14000 | 44 | 0.14 | 40 | 57 x 114 | 114 x 114 |
| | 15000 | | 0.15 | 43 | 58 x 117 | 117 x 117 |
| | 16000 | | 0.17 | 46 | 60 x 119 | 119 x 119 |
| | 18000 | | 0.22 | 52 | 62 x 125 | 125 x 125 |
| | 20000 | | 0.27 | 58 | 65 x 130 | 130 x 130 |
| 130 | 22000 | 44 | 0.33 | 42 | 59 x 116 | 116 x 116 |
| | 24000 | | 0.39 | 47 | 61 x 120 | 120 x 120 |
| | 26000 | | 0.46 | 51 | 63 x 124 | 124 x 124 |
| | 28000 | | 0.53 | 56 | 64 x 128 | 128 x 128 |
| | 30000 | | 0.61 | 60 | 66 x 132 | 132 x 132 |

Discharge Options

| 8F and 8R Discharge Pressure Drop and Coverage | | | | | | |
|--|-------|----------------|-------------------|-----------------|----------------|--------------------|
| Model | SCFM | Discharge Size | Air Pressure Drop | Mounting Height | Fixed Coverage | Revolving Coverage |
| 215 | 9000 | 36 | 0.18 | 30 | 49 x 97 | 97 x 97 |
| | 9500 | | 0.20 | 31 | 50 x 100 | 100 x 100 |
| | 10000 | | 0.22 | 32 | 51 x 103 | 103 x 103 |
| | 10500 | | 0.25 | 34 | 53 x 105 | 105 x 105 |
| | 11000 | | 0.27 | 35 | 54 x 107 | 107 x 107 |
| | 11500 | | 0.29 | 36 | 55 x 110 | 110 x 110 |
| | 12000 | | 0.32 | 37 | 56 x 112 | 112 x 112 |
| 218 | 12500 | 40 | 0.18 | 38 | 56 x 112 | 112 x 112 |
| | 13000 | | 0.19 | 39 | 56 x 113 | 113 x 113 |
| | 14000 | | 0.22 | 40 | 57 x 115 | 115 x 115 |
| | 15000 | | 0.25 | 41 | 58 x 116 | 116 x 116 |
| | 16000 | | 0.29 | 43 | 59 x 118 | 118 x 118 |
| | 17000 | | 0.33 | 44 | 60 x 120 | 120 x 120 |
| 220 | 18000 | 44 | 0.23 | 54 | 64 X 126 | 126 x 126 |
| | 19000 | | 0.25 | 57 | 65 x 129 | 129 x 129 |
| | 20000 | | 0.28 | 60 | 66 x 131 | 131 x 131 |
| | 21000 | | 0.31 | 62 | 67 x 134 | 134 x 134 |
| | 22000 | | 0.34 | 65 | 69 x 136 | 136 x 136 |
| | 23000 | | 0.37 | 68 | 70 x 140 | 140 x 140 |
| | 24000 | | 0.40 | 71 | 71 x 141 | 141 x 141 |
| | 25000 | | 0.43 | 73 | 72 X 144 | 144 x 144 |
| | 26000 | | 0.47 | 76 | 73 X 146 | 146 X 146 |
| 222 | 25000 | 44 | 0.43 | 75 | 72 X 144 | 144 x 144 |
| | 26000 | | 0.46 | 77 | 73 x 146 | 146 X 146 |
| | 27000 | | 0.50 | 79 | 74 x 149 | 149 x 149 |
| | 28000 | | 0.54 | 81 | 76 x 151 | 151 x 151 |
| | 29000 | | 0.58 | 82 | 77 x 153 | 153 x 153 |
| | 30000 | | 0.62 | 84 | 78 x 156 | 156 x 156 |
| | 31000 | | 0.66 | 86 | 79 x 158 | 158 x 158 |
| 225 | 30000 | 44 | 0.62 | 81 | 75 x 151 | 151 x 151 |
| | 32000 | | 0.70 | 85 | 78 x 157 | 157 x 157 |
| | 34000 | | 0.79 | 92 | 82 x 165 | 165 x 165 |
| | 36000 | | 0.89 | 94 | 85 x 170 | 170 x 170 |
| | 38000 | | 0.99 | 99 | 88 x 177 | 177 x 177 |
| | 40000 | | 1.10 | 103 | 91 x 183 | 183 x 183 |

Performance Table

Four Row DX Coil Data

| Model No. | Coil Face Area Qty) FH x FL | SCFM | Face Velocity (FPM) | Cabinet Loss ^{(2) (3)} | 4 Row DX | | |
|-----------|-----------------------------|--------|---------------------|---------------------------------|--------------------------|-----------|-------------------------|
| | | | | | Total MBH ⁽¹⁾ | LAT | Air P.D. ⁽³⁾ |
| 109 | 1) 21 x 24 | 1,600 | 457 | 0.31 | 66.75 | 68.8/66.6 | 0.39 |
| | 1) 24 x 24 | 1,800 | 450 | 0.34 | 75.32 | 68.7/66.5 | 0.38 |
| | 1) 24 x 24 | 2,000 | 500 | 0.36 | 81.98 | 69.2/66.8 | 0.45 |
| | 1) 27 x 27 | 2,250 | 444 | 0.39 | 107.40 | 67.0/64.8 | 0.37 |
| | 1) 27 x 27 | 2,500 | 494 | 0.43 | 116.44 | 67.5/65.2 | 0.45 |
| | 1) 27 x 33 | 2,750 | 444 | 0.47 | 152.08 | 64.6/62.5 | 0.37 |
| | 1) 27 x 33 | 3,000 | 485 | 0.49 | 162.03 | 65.1/62.9 | 0.43 |
| 112 | 1) 27 x 36 | 3,250 | 481 | 0.35 | 181.41 | 64.5/62.4 | 0.43 |
| | 1) 27 x 40 | 3,500 | 467 | 0.36 | 173.81 | 66.4/64.3 | 0.41 |
| | 1) 30 x 40 | 3,750 | 450 | 0.38 | 177.75 | 67.1/64.9 | 0.38 |
| | 1) 30 x 40 | 4,000 | 480 | 0.40 | 186.56 | 67.4/65.1 | 0.42 |
| | 1) 33 x 40 | 4,250 | 464 | 0.42 | 210.33 | 66.5/64.3 | 0.40 |
| 115 | 1) 36 x 38 | 4,500 | 474 | 0.35 | 256.55 | 64.1/62.0 | 0.42 |
| | 1) 36 x 42 | 5,000 | 476 | 0.37 | 249.13 | 66.4/64.2 | 0.42 |
| | 1) 39 x 43 | 5,500 | 472 | 0.39 | 283.55 | 65.9/63.7 | 0.41 |
| | 1) 39 x 47 | 6,000 | 471 | 0.43 | 324.54 | 65.0/62.9 | 0.41 |
| 118 | 1) 42 x 48 | 6,500 | 464 | 0.35 | 352.37 | 65.0/62.9 | 0.40 |
| | 1) 45 x 48 | 7,000 | 467 | 0.37 | 382.79 | 64.0/62.7 | 0.41 |
| | 1) 45 x 51 | 7,500 | 471 | 0.38 | 419.74 | 64.4/62.3 | 0.41 |
| | 1) 48 x 51 | 8,000 | 471 | 0.40 | 443.59 | 64.6/62.5 | 0.41 |
| | 1) 48 x 51 | 8,500 | 500 | 0.43 | 463.18 | 65.0/62.8 | 0.45 |
| 120 | 1) 39 x 66 | 9,000 | 503 | 0.34 | 485.25 | 65.2/63.0 | 0.46 |
| | 1) 42 x 66 | 9,500 | 494 | 0.35 | 515.03 | 65.1/62.9 | 0.45 |
| | 1) 42 x 68 | 10,000 | 504 | 0.36 | 545.65 | 65.0/62.8 | 0.46 |
| | 1) 45 x 68 | 10,500 | 494 | 0.37 | 576.37 | 64.9/62.7 | 0.45 |
| | 1) 45 x 71 | 11,000 | 496 | 0.38 | 613.08 | 64.6/62.4 | 0.45 |
| | 1) 45 x 71 | 11,000 | 496 | 0.34 | 613.08 | 64.6/62.4 | 0.45 |
| 122 | 1) 45 x 78 | 12,000 | 492 | 0.36 | 689.82 | 64.0/61.9 | 0.44 |
| | 1) 48 x 79 | 13,000 | 494 | 0.37 | 749.09 | 64.0/61.8 | 0.45 |
| | 1) 45 x 85 | 14,000 | 494 | 0.39 | 819.55 | 63.6/61.5 | 0.45 |
| | 1) 51 x 85 | 15,000 | 498 | 0.42 | 876.03 | 63.7/61.6 | 0.45 |
| | 2) 30 x 68 | 14,000 | 494 | 0.33 | 768.50 | 64.9/62.7 | 0.45 |
| | 2) 30 x 72 | 15,000 | 500 | 0.35 | 837.88 | 64.6/62.4 | 0.45 |
| 125 | 2) 30 x 77 | 16,000 | 499 | 0.36 | 912.86 | 64.2/62.0 | 0.45 |
| | 2) 33 x 79 | 18,000 | 497 | 0.39 | 1034.90 | 64.0/61.9 | 0.45 |
| | 2) 36 x 80 | 20,000 | 500 | 0.43 | 1151.28 | 64.0/61.8 | 0.45 |
| | 2) 36 x 88 | 22,000 | 500 | 0.36 | 1123.82 | 66.1/63.8 | 0.45 |
| | 2) 36 x 96 | 24,000 | 500 | 0.38 | 1283.00 | 65.3/63.1 | 0.45 |
| 130 | 2) 39 x 96 | 26,000 | 500 | 0.40 | 1389.92 | 65.3/63.1 | 0.45 |
| | 2) 39 x 103 | 28,000 | 502 | 0.43 | 1541.84 | 64.8/62.6 | 0.46 |
| | 2) 42 x 103 | 30,000 | 499 | 0.46 | 1654.46 | 64.8/62.6 | 0.45 |

⁽¹⁾ Nominal cooling capacity based on 4 row/8 FPI DX coil with 45° suction temperature and 95°/77° entering air temperature.

⁽²⁾ Cabinet Loss includes loss for centrifugal blower plenum effect and diffuser(s). This factor must be added to all units.

⁽³⁾ Calculating Cooling Coil Section Pressure Drop:

A. Cabinet Loss _____ " W.C.

B. Coil Air P.D. _____ " W.C.

C. Downturn Plenum (if applicable) 0.10 " W.C.

Cooling Coil Section Pressure Drop _____ " W.C.

Refer to Blower HP Charts for Total External Static pressure available.

Performance Table

| Four Row DX Coil Data | | | | | | | |
|-----------------------|-----------------------------|--------|---------------------|---------------------------------|--------------------------|-----------|-------------------------|
| Model No. | Coil Face Area Qty) FH x FL | SCFM | Face Velocity (FPM) | Cabinet Loss ^{(2) (3)} | 4 Row DX | | |
| | | | | | Total MBH ⁽¹⁾ | LAT | Air P.D. ⁽³⁾ |
| 215 | 1) 42 x 62 | 9,000 | 498 | 0.35 | 472.57 | 65.6/63.4 | 0.45 |
| | 1) 42 x 65 | 9,500 | 501 | 0.36 | 509.32 | 65.3/63.1 | 0.46 |
| | 1) 42 x 68 | 10,000 | 504 | 0.37 | 545.65 | 65.0/62.8 | 0.46 |
| | 1) 42 x 72 | 10,500 | 500 | 0.38 | 586.52 | 64.6/62.4 | 0.45 |
| | 1) 42 x 76 | 11,000 | 496 | 0.39 | 626.29 | 64.2/62.0 | 0.45 |
| | 1) 42 x 79 | 11,500 | 499 | 0.41 | 660.35 | 64.0/61.9 | 0.45 |
| | 1) 42 x 80 | 12,000 | 514 | 0.43 | 684.48 | 64.2/62.0 | 0.48 |
| 218 | 1) 45 x 80 | 12,500 | 500 | 0.34 | 719.55 | 64.0/61.8 | 0.45 |
| | 1) 45 x 83 | 13,000 | 501 | 0.35 | 753.89 | 63.8/61.7 | 0.46 |
| | 1) 45 x 90 | 14,000 | 498 | 0.36 | 724.49 | 65.9/63.6 | 0.45 |
| | 1) 48 x 90 | 15,000 | 500 | 0.38 | 775.31 | 65.9/63.6 | 0.45 |
| | 1) 51 x 93 | 16,000 | 486 | 0.40 | 847.85 | 65.4/63.3 | 0.43 |
| | 1) 51 x 93 | 17,000 | 516 | 0.43 | 886.57 | 65.8/63.5 | 0.48 |
| 220 | 2) 30 x 86 | 18,000 | 502 | 0.34 | 903.82 | 66.4/64.1 | 0.46 |
| | 2) 30 x 91 | 19,000 | 501 | 0.35 | 987.60 | 65.8/63.6 | 0.46 |
| | 2) 30 x 96 | 20,000 | 500 | 0.36 | 1069.16 | 65.3/63.1 | 0.45 |
| | 2) 30 x 101 | 21,000 | 499 | 0.37 | 1149.16 | 64.9/62.7 | 0.45 |
| | 2) 30 x 106 | 22,000 | 498 | 0.38 | 1227.38 | 64.6/62.4 | 0.45 |
| | 2) 30 x 111 | 23,000 | 497 | 0.39 | 1304.04 | 64.3/62.1 | 0.45 |
| | 2) 30 x 111 | 24,000 | 519 | 0.41 | 1342.96 | 64.6/62.3 | 0.48 |
| | 2) 30 x 120 | 25,000 | 500 | 0.43 | 1446.28 | 63.9/61.8 | 0.45 |
| | 2) 30 x 125 | 26,000 | 499 | 0.44 | 1519.00 | 63.7/61.6 | 0.45 |
| 222 | 2) 30 x 120 | 25,000 | 500 | 0.36 | 1446.28 | 63.9/61.8 | 0.45 |
| | 2) 30 x 125 | 26,000 | 499 | 0.37 | 1519.00 | 63.7/61.6 | 0.45 |
| | 2) 30 x 130 | 27,000 | 498 | 0.38 | 1590.44 | 63.5/61.4 | 0.45 |
| | 2) 30 x 135 | 28,000 | 498 | 0.39 | 1537.80 | 64.9/62.7 | 0.45 |
| | 2) 30 x 141 | 29,000 | 494 | 0.41 | 1624.16 | 64.5/62.3 | 0.45 |
| | 2) 31 1/2 x 139 | 30,000 | 493 | 0.42 | 1671.42 | 64.6/62.4 | 0.44 |
| | 2) 31 1/2 x 139 | 31,000 | 510 | 0.44 | 1701.50 | 64.8/62.6 | 0.47 |
| 225 | 2) 39 x 111 | 30,000 | 499 | 0.35 | 1699.20 | 64.3/62.1 | 0.45 |
| | 2) 39 x 118 | 32,000 | 501 | 0.36 | 1842.66 | 64.0/61.8 | 0.46 |
| | 2) 39 x 125 | 34,000 | 502 | 0.37 | 1982.60 | 63.7/61.6 | 0.46 |
| | 2) 39 x 133 | 36,000 | 500 | 0.38 | 2127.22 | 63.5/61.4 | 0.45 |
| | 2) 39 x 140 | 38,000 | 501 | 0.41 | 2113.16 | 64.6/62.5 | 0.46 |
| | 2) 39 x 147 | 40,000 | 502 | 0.43 | 2260.98 | 64.3/62.2 | 0.46 |
| | 2) 39 x 155 | 42,000 | 500 | 0.45 | 2415.24 | 64.0/61.9 | 0.46 |
| | 2) 42 x 151 | 44,000 | 500 | 0.47 | 2512.38 | 64.1/62.0 | 0.45 |
| | 2) 42 x 158 | 46,000 | 499 | 0.48 | 2660.82 | 63.9/61.8 | 0.45 |
| 230 | 2) 42 x 151 | 44,000 | 500 | 0.36 | 2512.38 | 64.1/62.0 | 0.45 |
| | 2) 42 x 166 | 48,000 | 496 | 0.38 | 2815.64 | 63.6/61.5 | 0.45 |
| | 2) 42 x 166 | 50,000 | 516 | 0.39 | 2894.58 | 63.9/61.7 | 0.48 |

⁽¹⁾ Nominal cooling capacity based on 4 row/8 FPI DX coil with 45° suction temperature and 95°/77° entering air temperature.

⁽²⁾ Cabinet Loss includes loss for centrifugal blower plenum effect and diffuser(s). This factor must be added to all units.

⁽³⁾ Calculating Cooling Coil Section Pressure Drop:

A. Cabinet Loss _____ " W.C.

B. Coil Air P.D. _____ " W.C.

C. Downturn Plenum (if applicable) 0.10 " W.C.

Cooling Coil Section Pressure Drop _____ " W.C.

Refer to Blower HP Charts for Total External Static pressure available.

Performance Table

| Six Row DX Coil Data | | | | | | | |
|----------------------|-----------------------------|--------|---------------------|---------------------------------|--------------------------|-----------|-------------------------|
| Model No. | Coil Face Area Qty) FH x FL | SCFM | Face Velocity (FPM) | Cabinet Loss ^{(2) (3)} | 6 Row DX | | |
| | | | | | Total MBH ⁽¹⁾ | LAT | Air P.D. ⁽³⁾ |
| 109 | 1) 21 x 24 | 1,600 | 457 | 0.31 | 107.03 | 59.6/58.8 | 0.59 |
| | 1) 24 x 24 | 1,800 | 450 | 0.34 | 121.02 | 59.5/58.7 | 0.57 |
| | 1) 24 x 24 | 2,000 | 500 | 0.36 | 131.23 | 60.1/59.2 | 0.68 |
| | 1) 27 x 27 | 2,250 | 444 | 0.39 | 157.03 | 58.6/57.8 | 0.56 |
| | 1) 27 x 27 | 2,500 | 494 | 0.43 | 170.23 | 59.3/58.4 | 0.67 |
| | 1) 27 x 33 | 2,750 | 444 | 0.47 | 183.15 | 59.7/58.9 | 0.56 |
| 112 | 1) 27 x 33 | 3,000 | 485 | 0.49 | 196.04 | 60.2/59.3 | 0.65 |
| | 1) 27 x 36 | 3,250 | 481 | 0.35 | 219.51 | 59.5/58.6 | 0.64 |
| | 1) 27 x 40 | 3,500 | 467 | 0.36 | 244.97 | 58.6/57.8 | 0.61 |
| | 1) 30 x 40 | 3,750 | 450 | 0.38 | 262.28 | 58.6/57.8 | 0.57 |
| | 1) 30 x 40 | 4,000 | 480 | 0.40 | 275.82 | 59.0/58.1 | 0.64 |
| 115 | 1) 33 x 40 | 4,250 | 464 | 0.42 | 297.36 | 58.6/57.6 | 0.60 |
| | 1) 36 x 38 | 4,500 | 474 | 0.35 | 306.73 | 59.2/58.4 | 0.61 |
| | 1) 36 x 42 | 5,000 | 476 | 0.37 | 349.25 | 58.6/57.8 | 0.63 |
| | 1) 39 x 43 | 5,500 | 472 | 0.39 | 389.13 | 58.3/57.5 | 0.62 |
| 118 | 1) 39 x 47 | 6,000 | 471 | 0.43 | 401.25 | 59.7/58.8 | 0.62 |
| | 1) 42 x 48 | 6,500 | 464 | 0.35 | 438.69 | 59.4/58.6 | 0.60 |
| | 1) 45 x 48 | 7,000 | 467 | 0.37 | 471.96 | 59.5/58.6 | 0.61 |
| | 1) 45 x 51 | 7,500 | 471 | 0.38 | 515.33 | 59.0/58.2 | 0.62 |
| | 1) 48 x 51 | 8,000 | 471 | 0.40 | 549.69 | 59.0/58.2 | 0.62 |
| 120 | 1) 48 x 51 | 8,500 | 500 | 0.43 | 576.37 | 59.4/58.5 | 0.68 |
| | 1) 39 x 66 | 9,000 | 503 | 0.34 | 579.05 | 60.6/59.7 | 0.69 |
| | 1) 42 x 66 | 9,500 | 494 | 0.35 | 613.63 | 60.5/59.6 | 0.67 |
| | 1) 42 x 68 | 10,000 | 504 | 0.36 | 651.95 | 60.3/59.4 | 0.69 |
| | 1) 45 x 68 | 10,500 | 494 | 0.37 | 687.35 | 60.2/59.3 | 0.67 |
| | 1) 45 x 71 | 11,000 | 496 | 0.38 | 732.48 | 59.8/58.9 | 0.67 |
| 122 | 1) 45 x 71 | 11,000 | 496 | 0.34 | 732.48 | 59.8/58.9 | 0.67 |
| | 1) 45 x 78 | 12,000 | 492 | 0.36 | 825.31 | 59.0/58.2 | 0.66 |
| | 1) 48 x 79 | 13,000 | 494 | 0.37 | 896.82 | 59.0/58.1 | 0.67 |
| | 1) 45 x 85 | 14,000 | 494 | 0.39 | 983.19 | 58.5/57.7 | 0.67 |
| | 1) 51 x 85 | 15,000 | 498 | 0.42 | 1051.45 | 58.6/57.7 | 0.68 |
| 125 | 2) 30 x 68 | 14,000 | 494 | 0.33 | 916.46 | 60.2/59.3 | 0.67 |
| | 2) 30 x 72 | 15,000 | 500 | 0.35 | 1001.52 | 59.7/58.9 | 0.68 |
| | 2) 30 x 77 | 16,000 | 499 | 0.36 | 1093.12 | 59.2/58.3 | 0.68 |
| | 2) 33 x 79 | 18,000 | 497 | 0.39 | 1239.56 | 59.0/58.2 | 0.68 |
| | 2) 36 x 80 | 20,000 | 500 | 0.43 | 1381.78 | 59.0/58.1 | 0.68 |
| 130 | 2) 36 x 88 | 22,000 | 500 | 0.36 | 1552.12 | 58.4/57.6 | 0.68 |
| | 2) 36 x 96 | 24,000 | 500 | 0.38 | 1716.36 | 58.1/57.2 | 0.68 |
| | 2) 39 x 96 | 26,000 | 500 | 0.40 | 1859.40 | 58.1/57.2 | 0.68 |
| | 2) 39 x 103 | 28,000 | 502 | 0.43 | 1846.80 | 60.0/59.1 | 0.69 |
| | 2) 42 x 103 | 30,000 | 499 | 0.46 | 1837.26 | 61.6/60.7 | 0.69 |

⁽¹⁾ Nominal cooling capacity based on 6 row/8 FPI DX coil with 45° suction temperature and 95°/77° entering air temperature.

⁽²⁾ Cabinet Loss includes loss for centrifugal blower plenum effect and diffuser(s). This factor must be added to all units.

⁽³⁾ Calculating Cooling Coil Section Pressure Drop:

A. Cabinet Loss _____ " W.C.

B. Coil Air P.D. _____ " W.C.

C. Downturn Plenum (if applicable) 0.10 " W.C.

Cooling Coil Section Pressure Drop _____ " W.C.

Refer to Blower HP Charts for Total External Static pressure available.

Performance Table

| Six Row DX Coil Data | | | | | | | |
|----------------------|-----------------------------|--------|---------------------|---------------------------------|--------------------------|-----------|-------------------------|
| Model No. | Coil Face Area Qty) FH x FL | SCFM | Face Velocity (FPM) | Cabinet Loss ^{(2) (3)} | 6 Row DX | | |
| | | | | | Total MBH ⁽¹⁾ | LAT | Air P.D. ⁽³⁾ |
| 215 | 1) 42 x 62 | 9,000 | 498 | 0.35 | 549.69 | 61.7/60.7 | 0.68 |
| | 1) 42 x 65 | 9,500 | 501 | 0.36 | 607.31 | 60.7/59.8 | 0.69 |
| | 1) 42 x 68 | 10,000 | 504 | 0.37 | 651.95 | 60.3/59.4 | 0.69 |
| | 1) 42 x 72 | 10,500 | 500 | 0.38 | 701.06 | 59.7/58.9 | 0.68 |
| | 1) 42 x 76 | 11,000 | 496 | 0.39 | 749.29 | 59.3/58.4 | 0.67 |
| | 1) 42 x 79 | 11,500 | 499 | 0.41 | 791.24 | 59.0/58.2 | 0.68 |
| | 1) 42 x 80 | 12,000 | 514 | 0.43 | 822.89 | 59.1/58.3 | 0.72 |
| 218 | 1) 45 x 80 | 12,500 | 500 | 0.34 | 862.65 | 59.0/58.1 | 0.68 |
| | 1) 45 x 83 | 13,000 | 501 | 0.35 | 905.04 | 58.8/57.9 | 0.69 |
| | 1) 45 x 90 | 14,000 | 498 | 0.36 | 993.00 | 58.3/57.4 | 0.68 |
| | 1) 48 x 90 | 15,000 | 500 | 0.38 | 1062.17 | 58.3/57.5 | 0.68 |
| | 1) 51 x 93 | 16,000 | 486 | 0.40 | 1146.98 | 58.0/57.2 | 0.65 |
| | 1) 51 x 93 | 17,000 | 516 | 0.43 | 1201.00 | 58.4/57.5 | 0.72 |
| 220 | 2) 30 x 86 | 18,000 | 502 | 0.34 | 1262.58 | 58.6/57.7 | 0.69 |
| | 2) 30 x 91 | 19,000 | 501 | 0.35 | 1347.22 | 58.3/57.5 | 0.69 |
| | 2) 30 x 96 | 20,000 | 500 | 0.36 | 1430.30 | 58.1/57.2 | 0.68 |
| | | 21,000 | | 0.37 | | CF | |
| | | 22,000 | | 0.38 | | | |
| | | 23,000 | | 0.39 | | | |
| | | 24,000 | | 0.41 | | | |
| | | 25,000 | | 0.43 | | | |
| | 26,000 | | 0.44 | | | | |
| 222 | | 25,000 | | 0.36 | | CF | |
| | | 26,000 | | 0.37 | | | |
| | | 27,000 | | 0.38 | | | |
| | | 28,000 | | 0.39 | | | |
| | | 29,000 | | 0.41 | | | |
| | | 30,000 | | 0.42 | | | |
| 225 | | 30,000 | | 0.35 | | CF | |
| | | 32,000 | | 0.36 | | | |
| | | 34,000 | | 0.37 | | | |
| | | 36,000 | | 0.38 | | | |
| | | 38,000 | | 0.41 | | | |
| | | 40,000 | | 0.43 | | | |
| | | 42,000 | | 0.45 | | | |
| | | 44,000 | | 0.47 | | | |
| 230 | | 46,000 | | 0.48 | | CF | |
| | | 44,000 | | 0.36 | | | |
| | | 48,000 | | 0.38 | | | |
| | 50,000 | | 0.39 | | | | |

⁽¹⁾ Nominal cooling capacity based on 6 row/8 FPI DX coil with 45° suction temperature and 95°/77° entering air temperature.

⁽²⁾ Cabinet Loss includes loss for centrifugal blower plenum effect and diffuser(s). This factor must be added to all units.

⁽³⁾ Calculating Cooling Coil Section Pressure Drop:

A. Cabinet Loss _____ " W.C.

B. Coil Air P.D. _____ " W.C.

C. Downturn Plenum (if applicable) 0.10" W.C.

Cooling Coil Section Pressure Drop _____ " W.C.

Refer to Blower HP Charts for Total External Static pressure available.

Performance Table

| Four Row CW Coil Data | | | | | | | | | |
|-----------------------|-----------------------------|------------|---------------------|--|--------------------------|-----------|-------------------------|-------|----------|
| Model No. | Coil Face Area Qty) FH x FL | SCFM | Face Velocity (FPM) | Cabinet Loss ⁽²⁾ ⁽³⁾ | 4 Row CW | | | | |
| | | | | | Total MBH ⁽¹⁾ | LAT | Air P.D. ⁽³⁾ | GPM | FPD (ft) |
| 109 | 1) 21 x 24 | 1,600 | 457 | 0.31 | 83.35 | 65.6/63.5 | 0.39 | 16.7 | 3.28 |
| | 1) 24 x 24 | 1,800 | 450 | 0.34 | 94.20 | 65.5/63.5 | 0.38 | 18.8 | 3.20 |
| | 1) 24 x 24 | 2,000 | 500 | 0.36 | 100.06 | 66.4/64.1 | 0.45 | 20.0 | 3.57 |
| | 1) 27 x 27 | 2,250 | 444 | 0.39 | 121.61 | 65.0/62.9 | 0.37 | 24.3 | 4.23 |
| | 1) 27 x 27 | 2,500 | 494 | 0.43 | 129.92 | 65.8/63.6 | 0.45 | 26.0 | 4.76 |
| | 1) 27 x 33 | 2,750 | 444 | 0.47 | 157.67 | 63.9/61.9 | 0.37 | 31.5 | 7.11 |
| | 1) 27 x 33 | 3,000 | 485 | 0.49 | 165.98 | 64.7/62.5 | 0.43 | 33.0 | 7.72 |
| 112 | 1) 27 x 36 | 3,250 | 481 | 0.35 | 150.67 | 67.5/65.2 | 0.46 | 30.0 | 1.25 |
| | 1) 27 x 40 | 3,500 | 467 | 0.36 | 170.61 | 66.7/64.5 | 0.41 | 34.0 | 1.61 |
| | 1) 30 x 40 | 3,750 | 450 | 0.38 | 185.61 | 66.4/64.3 | 0.38 | 37.0 | 1.55 |
| | 1) 30 x 40 | 4,000 | 480 | 0.40 | 192.87 | 66.9/64.7 | 0.42 | 38.5 | 1.67 |
| | 1) 33 x 40 | 4,250 | 464 | 0.42 | 207.91 | 66.7/64.5 | 0.40 | 41.5 | 1.61 |
| 115 | 1) 36 x 38 | 4,500 | 474 | 0.35 | 214.78 | 67.1/64.8 | 0.42 | 43.0 | 1.44 |
| | 1) 36 x 42 | 5,000 | 476 | 0.37 | 245.65 | 66.6/64.4 | 0.42 | 49.0 | 1.88 |
| | 1) 39 x 43 | 5,500 | 472 | 0.39 | 273.01 | 66.5/64.3 | 0.41 | 54.4 | 1.98 |
| | 1) 39 x 47 | 6,000 | 471 | 0.43 | 305.26 | 66.1/63.9 | 0.41 | 61.0 | 2.50 |
| 118 | 1) 42 x 48 | 6,500 | 464 | 0.35 | 334.88 | 65.8/63.7 | 0.40 | 67.0 | 2.61 |
| | 1) 45 x 48 | 7,000 | 467 | 0.37 | 359.91 | 65.9/63.7 | 0.41 | 72.0 | 2.62 |
| | 1) 45 x 51 | 7,500 | 471 | 0.38 | 390.67 | 65.7/63.5 | 0.41 | 78.0 | 3.09 |
| | 1) 48 x 51 | 8,000 | 471 | 0.40 | 416.40 | 65.7/63.5 | 0.41 | 83.0 | 3.07 |
| | 1) 51 x 51 | 8,500 | 471 | 0.43 | 442.19 | 65.7/63.5 | 0.41 | 88.0 | 3.06 |
| 120 | 1) 39 x 66 | 9,000 | 503 | 0.34 | 488.31 | 65.1/62.9 | 0.46 | 98.0 | 6.58 |
| | 1) 42 x 66 | 9,500 | 494 | 0.35 | 517.72 | 65.0/62.8 | 0.45 | 103.0 | 6.31 |
| | 1) 42 x 68 | 10,000 | 504 | 0.36 | 551.01 | 64.8/62.6 | 0.46 | 110.0 | 7.17 |
| | 1) 45 x 68 | 10,500 | 494 | 0.37 | 583.47 | 64.6/62.5 | 0.45 | 117.0 | 7.08 |
| | 1) 45 x 71 | 11,000 | 496 | 0.38 | 614.90 | 64.5/62.4 | 0.45 | 123.0 | 7.88 |
| 122 | 1) 45 x 71 | 11,000 | 496 | 0.34 | 614.90 | 64.5/62.4 | 0.45 | 123.0 | 7.88 |
| | 1) 45 x 78 | 12,000 | 492 | 0.36 | 683.97 | 64.2/62.0 | 0.44 | 137.0 | 9.94 |
| | 1) 48 x 79 | 13,000 | 494 | 0.37 | 741.07 | 64.2/62.0 | 0.45 | 148.0 | 10.22 |
| | 1) 48 x 85 | 14,000 | 494 | 0.39 | 808.06 | 63.9/61.8 | 0.45 | 162.0 | 12.40 |
| | 1) 51 x 85 | 15,000 | 498 | 0.42 | 863.09 | 64.0/61.9 | 0.45 | 173.0 | 12.52 |
| | 125 | 2) 30 x 68 | 14,000 | 494 | 0.33 | 691.30 | 66.6/64.3 | 0.45 | 138.0 |
| 2) 30 x 72 | | 15,000 | 500 | 0.35 | 750.46 | 66.4/64.1 | 0.45 | 150.0 | 2.57 |
| 2) 30 x 77 | | 16,000 | 499 | 0.36 | 814.74 | 66.1/63.9 | 0.45 | 162.0 | 3.02 |
| 2) 33 x 79 | | 18,000 | 497 | 0.39 | 1012.98 | 64.4/62.3 | 0.46 | 202.0 | 3.82 |
| 2) 36 x 80 | | 20,000 | 500 | 0.43 | 1127.12 | 64.4/62.2 | 0.46 | 226.0 | 3.49 |
| 130 | 2) 36 x 88 | 22,000 | 500 | 0.36 | 1264.46 | 64.0/61.9 | 0.46 | 252.0 | 5.06 |
| | 2) 36 x 96 | 24,000 | 500 | 0.38 | 1405.18 | 63.0/61.5 | 0.46 | 280.0 | 6.34 |
| | 2) 39 x 96 | 26,000 | 500 | 0.40 | 1523.18 | 63.7/61.5 | 0.46 | 304.0 | 6.36 |
| | 2) 39 x 103 | 28,000 | 502 | 0.43 | 1658.30 | 63.4/61.3 | 0.47 | 330.0 | 7.59 |
| | 2) 42 x 103 | 30,000 | 499 | 0.46 | 1782.18 | 63.4/61.3 | 0.46 | 356.0 | 7.62 |

⁽¹⁾ Nominal cooling capacity based on 4 row/8 FPI CW coil with 45°EWT, 55° LWT, and 95°/77° entering air temperature.

⁽²⁾ Cabinet Loss includes loss for centrifugal blower plenum effect and diffuser(s). This factor must be added to all units.

⁽³⁾ Calculating Cooling Coil Section Pressure Drop:

A. Cabinet Loss _____ " W.C.

B. Coil Air P.D. _____ " W.C.

C. Downturn Plenum (if applicable) 0.10 " W.C.

Cooling Coil Section Pressure Drop _____ " W.C.

Refer to Blower HP Charts for Total External Static pressure available.

Performance Table

Four Row CW Coil Data

| Model No. | Coil Face Area Qty) FH x FL | SCFM | Face Velocity (FPM) | Cabinet Loss ^{(2) (3)} | 4 Row CW | | | | |
|-----------|-----------------------------|--------|---------------------|---------------------------------|--------------------------|-----------|-------------------------|-------|----------|
| | | | | | Total MBH ⁽¹⁾ | LAT | Air P.D. ⁽³⁾ | GPM | FPD (ft) |
| 215 | 1) 42 x 62 | 9,000 | 492 | 0.35 | 481.50 | 65.3/63.1 | 0.45 | 96.0 | 5.43 |
| | 1) 42 x 65 | 9,500 | 501 | 0.36 | 514.30 | 65.1/62.9 | 0.46 | 103.0 | 6.27 |
| | 1) 42 x 68 | 10,000 | 504 | 0.37 | 490.19 | 66.8/64.4 | 0.46 | 98.0 | 2.22 |
| | 1) 42 x 72 | 10,500 | 500 | 0.38 | 525.33 | 66.4/64.1 | 0.45 | 105.0 | 2.57 |
| | 1) 42 x 76 | 11,000 | 496 | 0.39 | 560.49 | 66.1/63.9 | 0.45 | 112.0 | 2.94 |
| | 1) 42 x 79 | 11,500 | 499 | 0.41 | 590.73 | 66.0/63.7 | 0.45 | 118.0 | 3.28 |
| | 1) 42 x 80 | 12,000 | 514 | 0.43 | 611.02 | 66.2/63.9 | 0.48 | 122.0 | 3.49 |
| 218 | 1) 45 x 80 | 12,500 | 500 | 0.34 | 644.41 | 65.9/63.7 | 0.45 | 129.0 | 3.41 |
| | 1) 45 x 83 | 13,000 | 501 | 0.35 | 675.48 | 65.8/63.6 | 0.46 | 135.0 | 3.76 |
| | 1) 45 x 90 | 14,000 | 498 | 0.36 | 742.98 | 65.5/63.2 | 0.45 | 148.0 | 4.58 |
| | 1) 48 x 90 | 15,000 | 500 | 0.38 | 794.23 | 65.5/63.3 | 0.45 | 158.0 | 4.58 |
| | 1) 51 x 93 | 16,000 | 486 | 0.40 | 865.12 | 65.1/62.9 | 0.43 | 173.0 | 4.90 |
| | 1) 51 x 93 | 17,000 | 516 | 0.43 | 895.44 | 65.6/63.4 | 0.48 | 178.0 | 5.16 |
| 220 | 2) 30 x 86 | 18,000 | 502 | 0.34 | 869.42 | 67.0/64.7 | 0.46 | 174.0 | 1.82 |
| | 2) 30 x 91 | 19,000 | 501 | 0.35 | 933.28 | 66.7/64.4 | 0.46 | 186.0 | 2.10 |
| | 2) 30 x 96 | 20,000 | 500 | 0.36 | 1000.62 | 66.4/64.1 | 0.45 | 200.0 | 2.44 |
| | 2) 30 x 101 | 21,000 | 499 | 0.37 | 1064.86 | 66.2/63.9 | 0.45 | 212.0 | 2.95 |
| | 2) 30 x 106 | 22,000 | 498 | 0.38 | 1132.42 | 66.0/63.7 | 0.45 | 226.0 | 3.16 |
| | 2) 30 x 111 | 23,000 | 497 | 0.39 | 1200.04 | 65.7/63.5 | 0.45 | 240.0 | 3.59 |
| | 2) 30 x 116 | 24,000 | 497 | 0.41 | 1264.74 | 65.6/63.3 | 0.45 | 252.0 | 3.99 |
| | 2) 30 x 120 | 25,000 | 500 | 0.43 | 1324.70 | 65.5/63.3 | 0.45 | 264.0 | 3.67 |
| | 2) 30 x 125 | 26,000 | 499 | 0.44 | 1395.50 | 65.3/63.0 | 0.45 | 280.0 | 4.98 |
| 222 | 2) 30 x 120 | 25,000 | 500 | 0.36 | 1324.70 | 65.5/63.3 | 0.45 | 264.0 | 3.67 |
| | 2) 30 x 125 | 26,000 | 499 | 0.37 | 1395.50 | 65.3/63.0 | 0.45 | 280.0 | 4.98 |
| | 2) 30 x 130 | 27,000 | 498 | 0.38 | 1457.68 | 65.2/63.0 | 0.45 | 290.0 | 5.39 |
| | 2) 30 x 135 | 28,000 | 498 | 0.39 | 1549.50 | 64.7/62.5 | 0.45 | 310.0 | 6.18 |
| | 2) 30 x 141 | 29,000 | 494 | 0.41 | 1621.16 | 64.5/62.4 | 0.45 | 324.0 | 6.83 |
| | 2) 31½ x 139 | 30,000 | 493 | 0.42 | 1675.10 | 64.5/62.4 | 0.44 | 336.0 | 6.63 |
| | 2) 31½ x 141 | 31,000 | 503 | 0.44 | 1718.74 | 64.7/62.5 | 0.46 | 342.0 | 4.53 |
| 225 | 2) 39 x 111 | 30,000 | 499 | 0.35 | 1559.20 | 65.8/63.6 | 0.45 | 310.0 | 3.55 |
| | 2) 39 x 118 | 32,000 | 501 | 0.36 | 1685.38 | 65.6/63.3 | 0.46 | 336.0 | 4.21 |
| | 2) 39 x 125 | 34,000 | 502 | 0.37 | 1815.88 | 65.4/63.1 | 0.46 | 362.0 | 4.93 |
| | 2) 39 x 133 | 36,000 | 500 | 0.38 | 1956.82 | 65.0/62.8 | 0.45 | 390.0 | 5.79 |
| | 2) 39 x 140 | 38,000 | 501 | 0.41 | 2107.46 | 64.7/62.5 | 0.46 | 420.0 | 6.77 |
| | 2) 39 x 147 | 40,000 | 502 | 0.43 | 2236.58 | 64.5/62.4 | 0.46 | 446.0 | 7.71 |
| | 2) 39 x 155 | 42,000 | 500 | 0.45 | 2377.04 | 64.3/62.1 | 0.46 | 476.0 | 8.88 |
| | 2) 42 x 151 | 44,000 | 500 | 0.47 | 2482.12 | 64.4/62.2 | 0.45 | 498.0 | 8.33 |
| | 2) 42 x 158 | 46,000 | 499 | 0.48 | 2614.64 | 64.2/62.1 | 0.45 | 499.0 | 9.33 |
| 230 | 2) 42 x 151 | 44,000 | 500 | 0.36 | 2482.12 | 64.4/62.2 | 0.45 | 498.0 | 8.33 |
| | 2) 42 x 166 | 48,000 | 496 | 0.38 | 2753.88 | 64.0/61.9 | 0.45 | 550.0 | 10.42 |
| | 2) 42 x 166 | 50,000 | 516 | 0.39 | 2813.78 | 64.5/62.2 | 0.48 | 562.0 | 10.83 |

⁽¹⁾ Nominal cooling capacity based on 4 row/8 FPI CW coil with 45° EWT, 55° LWT, and 95°/77° entering air temperature.

⁽²⁾ Cabinet Loss includes loss for centrifugal blower plenum effect and diffuser(s). This factor must be added to all units.

⁽³⁾ Calculating Cooling Coil Section Pressure Drop:

A. Cabinet Loss _____ " W.C.

B. Coil Air P.D. _____ " W.C.

C. Downturn Plenum (if applicable) 0.10 " W.C.

Cooling Coil Section Pressure Drop _____ " W.C.

Refer to Blower HP Charts for Total External Static pressure available.

Performance Table

| Six Row CW Coil Data | | | | | | | | | |
|----------------------|-----------------------------|------------|---------------------|--|--------------------------|-----------|-------------------------|-------|----------|
| Model No. | Coil Face Area Qty) FH x FL | SCFM | Face Velocity (FPM) | Cabinet Loss ⁽²⁾ ⁽³⁾ | 6 Row CW | | | | |
| | | | | | Total MBH ⁽¹⁾ | LAT | Air P.D. ⁽³⁾ | GPM | FPD (ft) |
| 109 | 1) 21 x 24 | 1,600 | 457 | 0.31 | 95.27 | 62.1/61.2 | 0.59 | 19.0 | 1.00 |
| | 1) 24 x 24 | 1,800 | 450 | 0.34 | 107.95 | 61.9/61.1 | 0.57 | 21.6 | 0.99 |
| | 1) 24 x 24 | 2,000 | 500 | 0.36 | 115.38 | 62.8/61.8 | 0.68 | 26.0 | 1.11 |
| | 1) 27 x 27 | 2,250 | 444 | 0.39 | 140.26 | 61.2/60.3 | 0.56 | 28.0 | 1.31 |
| | 1) 27 x 27 | 2,500 | 494 | 0.43 | 150.02 | 62.0/61.1 | 0.67 | 30.0 | 1.48 |
| | 1) 27 x 33 | 2,750 | 444 | 0.47 | 180.59 | 60.0/59.2 | 0.56 | 36.0 | 2.17 |
| | 1) 27 x 33 | 3,000 | 485 | 0.49 | 191.14 | 60.8/59.9 | 0.65 | 68.0 | 2.39 |
| 112 | 1) 27 x 36 | 3,250 | 481 | 0.35 | 212.50 | 60.2/59.3 | 0.64 | 42.6 | 3.01 |
| | 1) 27 x 40 | 3,500 | 467 | 0.36 | 235.74 | 59.5/58.7 | 0.61 | 47.0 | 3.71 |
| | 1) 30 x 40 | 3,750 | 450 | 0.38 | 255.30 | 59.2/58.4 | 0.57 | 51.0 | 3.56 |
| | 1) 30 x 40 | 4,000 | 480 | 0.40 | 267.48 | 59.7/58.8 | 0.64 | 53.5 | 3.87 |
| | 1) 33 x 40 | 4,250 | 464 | 0.42 | 286.55 | 59.5/58.6 | 0.60 | 57.0 | 3.66 |
| 115 | 1) 36 x 38 | 4,500 | 474 | 0.35 | 299.17 | 59.8/59.0 | 0.62 | 60.0 | 3.37 |
| | 1) 36 x 42 | 5,000 | 476 | 0.37 | 338.18 | 59.4/58.6 | 0.63 | 67.5 | 4.30 |
| | 1) 39 x 43 | 5,500 | 472 | 0.39 | 374.89 | 59.2/58.4 | 0.62 | 75.0 | 4.54 |
| | 1) 39 x 47 | 6,000 | 471 | 0.43 | 415.61 | 58.8/58.0 | 0.62 | 83.0 | 5.62 |
| 118 | 1) 42 x 48 | 6,500 | 464 | 0.35 | 454.29 | 58.6/57.8 | 0.60 | 91.0 | 5.84 |
| | 1) 45 x 48 | 7,000 | 467 | 0.37 | 487.50 | 58.7/57.9 | 0.61 | 97.0 | 5.79 |
| | 1) 45 x 51 | 7,500 | 471 | 0.38 | 528.11 | 58.4/57.6 | 0.62 | 105.0 | 6.82 |
| | 1) 48 x 51 | 8,000 | 471 | 0.40 | 568.41 | 58.2/57.4 | 0.62 | 114.0 | 7.04 |
| | 1) 51 x 51 | 8,500 | 471 | 0.43 | 601.36 | 58.3/57.5 | 0.62 | 120.0 | 6.92 |
| 120 | 1) 39 x 66 | 9,000 | 503 | 0.34 | 603.74 | 59.6/58.8 | 0.69 | 120.0 | 4.59 |
| | 1) 42 x 66 | 9,500 | 494 | 0.35 | 642.20 | 59.5/58.6 | 0.67 | 128.0 | 4.52 |
| | 1) 42 x 68 | 10,000 | 504 | 0.36 | 675.44 | 59.5/58.6 | 0.69 | 135.0 | 5.03 |
| | 1) 45 x 68 | 10,500 | 494 | 0.37 | 713.59 | 59.3/58.5 | 0.67 | 143.0 | 4.93 |
| | 1) 45 x 71 | 11,000 | 496 | 0.38 | 751.54 | 59.2/58.3 | 0.67 | 150.0 | 5.46 |
| 122 | 1) 45 x 71 | 11,000 | 496 | 0.34 | 751.54 | 59.2/58.3 | 0.67 | 150.0 | 5.46 |
| | 1) 45 x 78 | 12,000 | 492 | 0.36 | 842.59 | 58.5/57.7 | 0.66 | 168.0 | 6.96 |
| | 1) 48 x 79 | 13,000 | 494 | 0.37 | 913.52 | 58.5/57.7 | 0.67 | 182.0 | 7.19 |
| | 1) 48 x 85 | 14,000 | 494 | 0.39 | 993.95 | 58.3/57.4 | 0.67 | 198.0 | 8.64 |
| | 1) 51 x 85 | 15,000 | 498 | 0.42 | 1062.76 | 58.3/57.5 | 0.68 | 212.0 | 8.75 |
| | 125 | 2) 30 x 68 | 14,000 | 494 | 0.33 | 951.70 | 59.3/58.5 | 0.67 | 190.0 |
| 2) 30 x 72 | | 15,000 | 500 | 0.35 | 1023.92 | 59.2/58.4 | 0.68 | 204.0 | 3.79 |
| 2) 30 x 77 | | 16,000 | 499 | 0.36 | 1105.24 | 58.9/58.1 | 0.68 | 220.0 | 6.70 |
| 2) 33 x 79 | | 18,000 | 497 | 0.39 | 1331.98 | 57.2/56.4 | 0.69 | 266.0 | 8.01 |
| 2) 36 x 80 | | 20,000 | 500 | 0.43 | 1480.84 | 57.2/56.4 | 0.70 | 296.0 | 8.35 |
| 130 | 2) 36 x 88 | 22,000 | 500 | 0.36 | 1564.46 | 58.2/57.4 | 0.68 | 312.0 | 9.58 |
| | 2) 36 x 96 | 24,000 | 500 | 0.38 | 1821.12 | 56.5/55.7 | 0.70 | 364.0 | 13.12 |
| | 2) 39 x 96 | 26,000 | 500 | 0.40 | 1876.34 | 57.9/57.0 | 0.68 | 376.0 | 12.06 |
| | 2) 39 x 103 | 28,000 | 502 | 0.43 | 2036.22 | 57.7/56.8 | 0.69 | 408.0 | 14.44 |
| | 2) 42 x 103 | 30,000 | 499 | 0.46 | 2297.58 | 56.3/55.5 | 0.69 | 460.0 | 15.66 |

⁽¹⁾ Nominal cooling capacity based on 6 row/8 FPI CW coil with 45°EWT, 55° LWT, and 95°/77° entering air temperature.

⁽²⁾ Cabinet Loss includes loss for centrifugal blower plenum effect and diffuser(s). This factor must be added to all units.

⁽³⁾ Calculating Cooling Coil Section Pressure Drop:

A. Cabinet Loss _____ " W.C.

B. Coil Air P.D. _____ " W.C.

C. Downturn Plenum (if applicable) 0.10 " W.C.

Cooling Coil Section Pressure Drop _____ " W.C.

Refer to Blower HP Charts for Total External Static pressure available.

Performance Table

| Six Row CW Coil Data | | | | | | | | | |
|----------------------|-----------------------------|--------|---------------------|--|--------------------------|-----------|-------------------------|-------|----------|
| Model No. | Coil Face Area Qty) FH x FL | SCFM | Face Velocity (FPM) | Cabinet Loss ⁽²⁾ ⁽³⁾ | 6 Row CW | | | | |
| | | | | | Total MBH ⁽¹⁾ | LAT | Air P.D. ⁽³⁾ | GPM | FPD (ft) |
| 215 | 1) 42 x 62 | 9,000 | 498 | 0.35 | 598.85 | 59.8/58.9 | 0.68 | 119.0 | 3.87 |
| | 1) 42 x 65 | 9,500 | 501 | 0.36 | 637.10 | 59.6/58.8 | 0.69 | 127.0 | 4.43 |
| | 1) 42 x 68 | 10,000 | 504 | 0.37 | 675.44 | 59.5/58.6 | 0.69 | 135.0 | 5.03 |
| | 1) 42 x 72 | 10,500 | 500 | 0.38 | 718.19 | 59.2/58.3 | 0.68 | 144.0 | 5.78 |
| | 1) 42 x 76 | 11,000 | 496 | 0.39 | 760.42 | 58.9/58.1 | 0.67 | 152.0 | 6.51 |
| | 1) 42 x 79 | 11,500 | 499 | 0.41 | 801.86 | 58.7/57.9 | 0.68 | 160.0 | 7.25 |
| | 1) 42 x 80 | 12,000 | 514 | 0.43 | 837.96 | 58.7/57.8 | 0.72 | 168.0 | 7.95 |
| 218 | 1) 45 x 80 | 12,500 | 500 | 0.34 | 879.17 | 58.5/57.7 | 0.68 | 175.0 | 7.56 |
| | 1) 45 x 83 | 13,000 | 501 | 0.35 | 916.59 | 58.5/57.6 | 0.69 | 183.0 | 8.33 |
| | 1) 45 x 90 | 14,000 | 498 | 0.36 | 1002.10 | 58.1/57.2 | 0.68 | 200.0 | 10.12 |
| | 1) 48 x 90 | 15,000 | 500 | 0.38 | 1073.22 | 58.1/57.2 | 0.68 | 215.0 | 10.27 |
| | 1) 51 x 93 | 16,000 | 486 | 0.40 | 1155.22 | 57.8/57.0 | 0.65 | 230.0 | 10.56 |
| | 1) 51 x 93 | 17,000 | 516 | 0.43 | 1207.03 | 58.3/57.4 | 0.72 | 240.0 | 11.38 |
| 220 | 2) 30 x 86 | 18,000 | 502 | 0.34 | 1276.26 | 58.3/57.5 | 0.69 | 256.0 | 9.22 |
| | 2) 30 x 91 | 19,000 | 501 | 0.35 | 1357.80 | 58.1/57.3 | 0.69 | 270.0 | 10.40 |
| | 2) 30 x 96 | 20,000 | 500 | 0.36 | 1442.08 | 57.9/57.0 | 0.68 | 288.0 | 11.97 |
| | 2) 30 x 101 | 21,000 | 499 | 0.37 | 1526.44 | 57.7/56.8 | 0.68 | 306.0 | 13.67 |
| | 2) 30 x 106 | 22,000 | 498 | 0.38 | 1605.04 | 57.6/56.7 | 0.68 | 322.0 | 15.33 |
| | | 23,000 | | 0.39 | | | | | |
| | | 24,000 | | 0.41 | | | CF | | |
| | | 25,000 | | 0.43 | | | | | |
| | 26,000 | | 0.44 | | | | | | |
| 222 | | 25,000 | | 0.36 | | | | | |
| | | 26,000 | | 0.37 | | | | | |
| | | 27,000 | | 0.38 | | | | | |
| | | 28,000 | | 0.39 | | | CF | | |
| | | 29,000 | | 0.41 | | | | | |
| | | 30,000 | | 0.42 | | | | | |
| | | 31,000 | | 0.44 | | | | | |
| 225 | | 30,000 | | 0.35 | | | | | |
| | | 32,000 | | 0.36 | | | | | |
| | | 34,000 | | 0.37 | | | | | |
| | | 36,000 | | 0.38 | | | | | |
| | | 38,000 | | 0.41 | | | CF | | |
| | | 40,000 | | 0.43 | | | | | |
| | | 42,000 | | 0.45 | | | | | |
| | | 44,000 | | 0.47 | | | | | |
| | 46,000 | | 0.48 | | | | | | |
| 230 | | 44,000 | | 0.36 | | | | | |
| | | 48,000 | | 0.38 | | | CF | | |
| | | 50,000 | | 0.39 | | | | | |

⁽¹⁾ Nominal cooling capacity based on 6 row/8 FPI CW coil with 45° EWT, 55° LWT, and 95°/77° entering air temperature.

⁽²⁾ Cabinet Loss includes loss for centrifugal blower plenum effect and diffuser(s). This factor must be added to all units.

⁽³⁾ Calculating Cooling Coil Section Pressure Drop:

A. Cabinet Loss _____ " W.C.

B. Coil Air P.D. _____ " W.C.

C. Downturn Plenum (if applicable) 0.10 " W.C.

Cooling Coil Section Pressure Drop _____ " W.C.

Refer to Blower HP Charts for Total External Static pressure available.

Control Systems

MDT Touch Control System

C000775

Application:

Modulating Discharge Temperature Control with Equipment Touch Touchscreen controller allowing after hours unit enable, discharge setpoint adjustment, operating feedback, monitoring of alarm status and digital temperature readout.

Includes:


Discharge air sensor ⑤ mounted in unit discharge with remote mounted Equipment Touch Touchscreen controller ⑥ to set discharge temp, operating schedules, and optional damper control setpoints. Service information, operating feedback and alarm status can also be monitored.

COMPONENT I.D.

- 1. Unit DDC Controller
- 2. Signal Conditioner

- 3. Modulating Gas Valve
- 4. Inlet Air Sensor

- 5. Discharge Air Sensor
- 6. Equipment Touch Touchscreen Interface

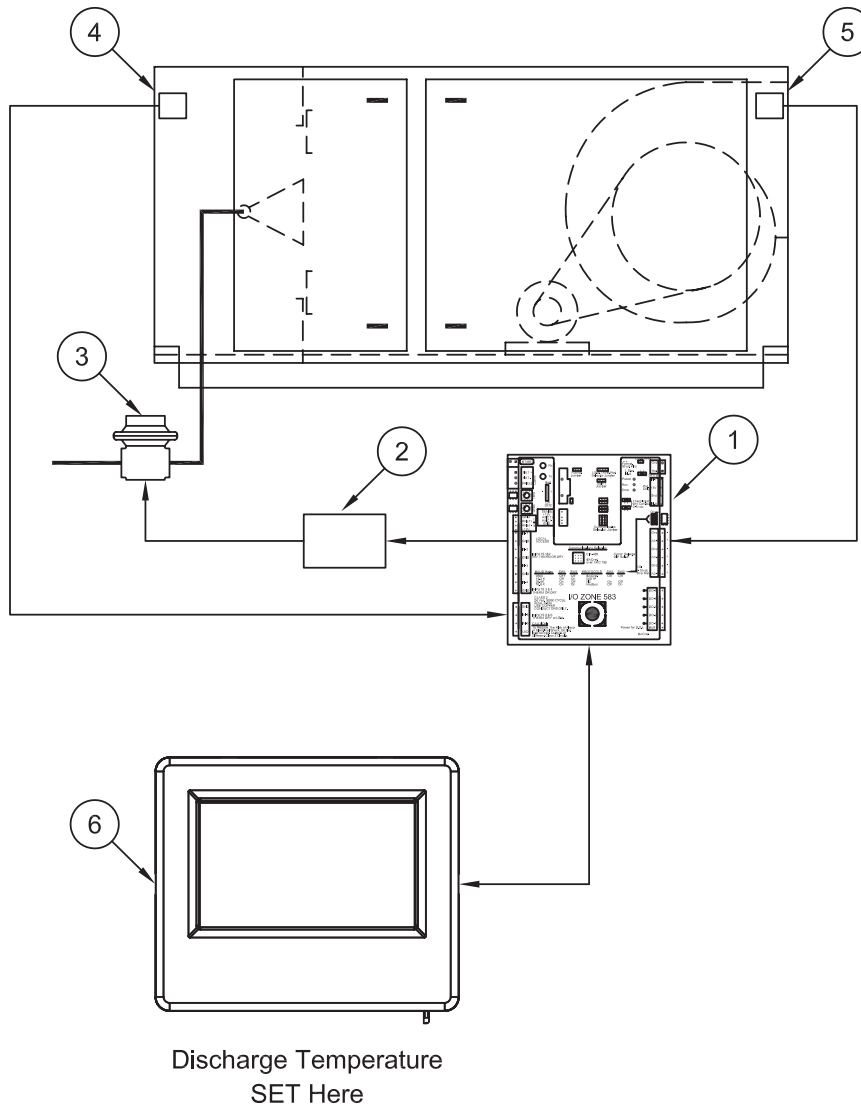

Control Systems

MRT Touch Control System

C000774

Application:

Modulating Room Temperature Control with Equipment Touch Touchscreen controller allowing after hours unit enable, room setpoint adjustment, operating feedback, monitoring of alarm status and digital temperature readout with ZS-Standard room sensor.

Includes:

Discharge air sensor ⑤ mounted in unit discharge with remote mounted Equipment Touch Touchscreen controller ⑦ to set space temp, operating schedules, and optional damper control setpoints. Service information, operating feedback and alarm status can also be monitored. Also includes a ZS-Standard room sensor ⑥.


COMPONENT I.D.

1. Unit DDC Controller
2. Signal Conditioner

3. Modulating Gas Valve
4. Inlet Air Sensor

5. Discharge Air Sensor
6. Room Thermostat

7. Equipment Touch Touchscreen Interface

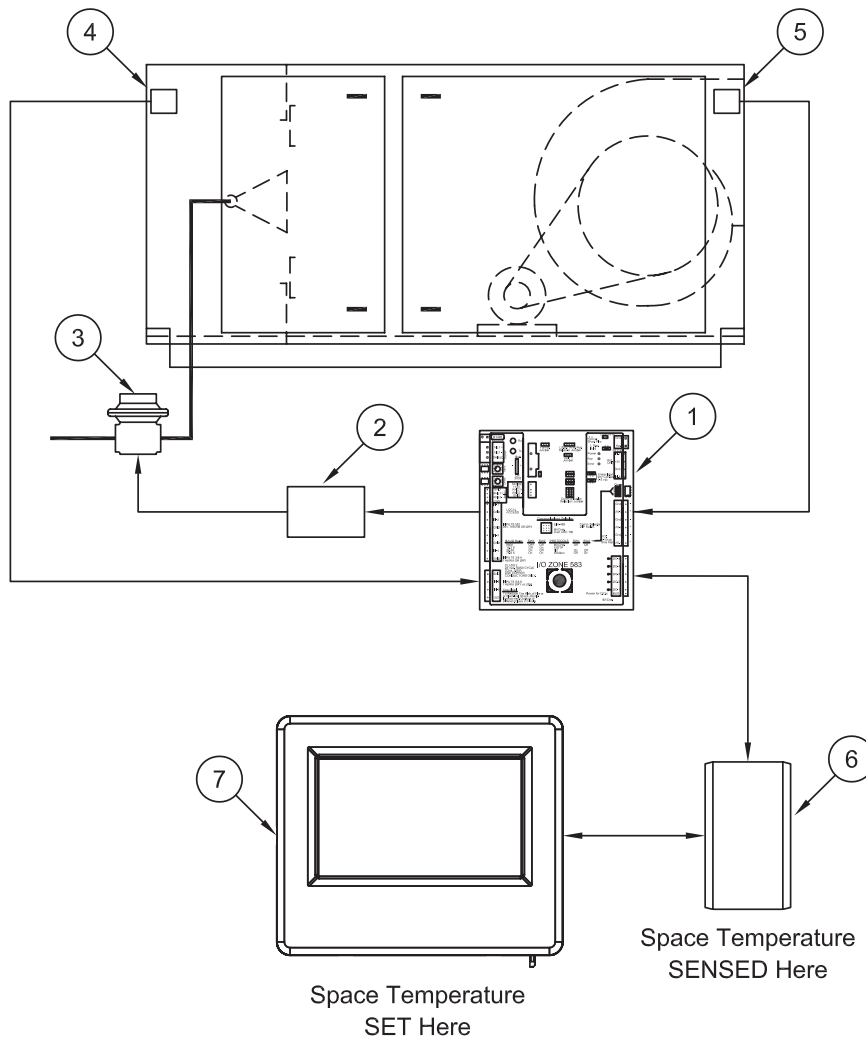

Control Systems


System 14

C000779

| | |
|--|---|
| Application: | Includes: |
| Non-DDC Modulating Discharge Temperature Control | System 14 Amplifier ① compares signals from Discharge Air Sensor ④ mounted in unit discharge and Remote Temperature Selector ② mounted in space. Modulating Gas Valve ③ receives signal from amplifier and adjusts gas pressure to maintain constant discharge air temperature. |

COMPONENT I.D.

- | | |
|--------------------------------|-------------------------|
| 1. Amplifier (System14) | 3. Modulating Gas Valve |
| 2. Remote Temperature Selector | 4. Discharge Air Sensor |

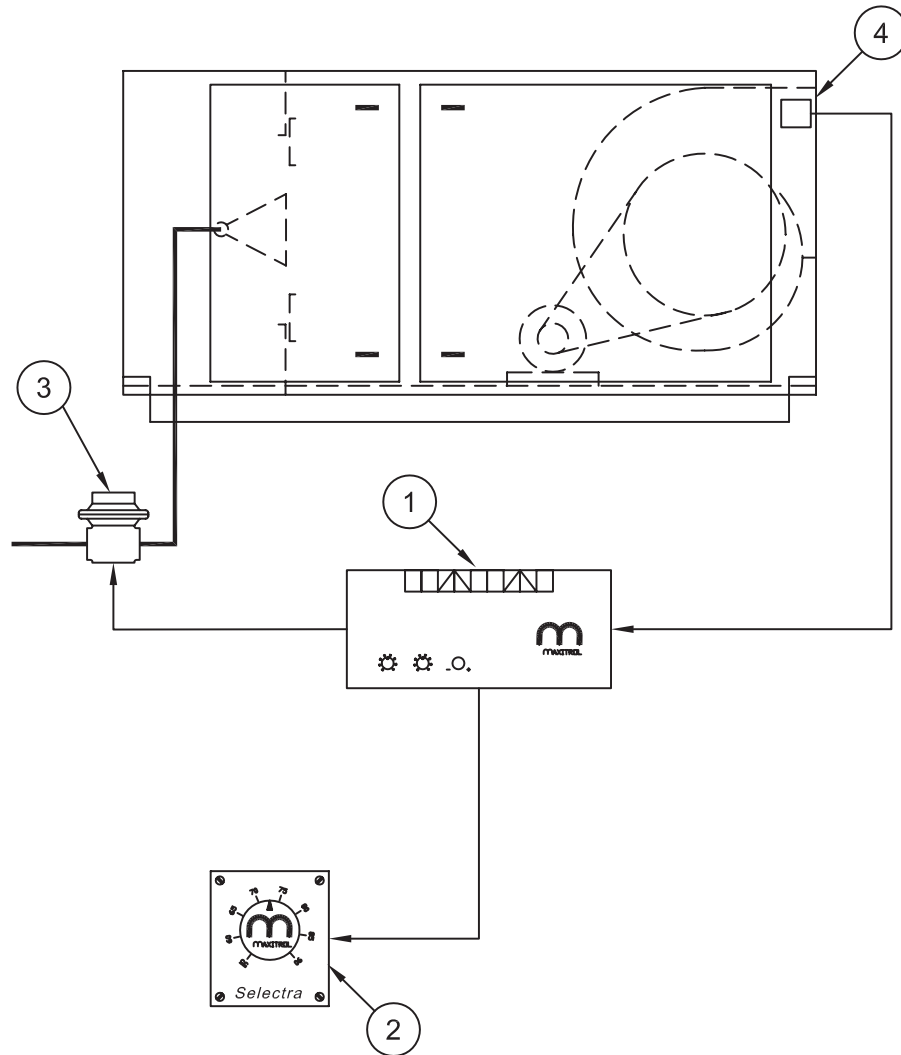

Discharge Temperature
SET Here

Control Systems

System 44

C000780

Application:

Non-DDC Modulating Room Temperature Control


Includes:

System 44 Amplifier ① compares signals from Discharge Air Sensor ④ mounted in unit discharge and Remote Room Thermostat ② mounted in space and sends signal to Modulating Gas Valve ③ to adjust gas pressure for desired space temperature while maintaining preset minimum and maximum discharge air temperature settings.

COMPONENT I.D.

1. Amplifier (System44)
2. Room Thermostat

3. Modulating Gas Valve
4. Discharge Air Sensor

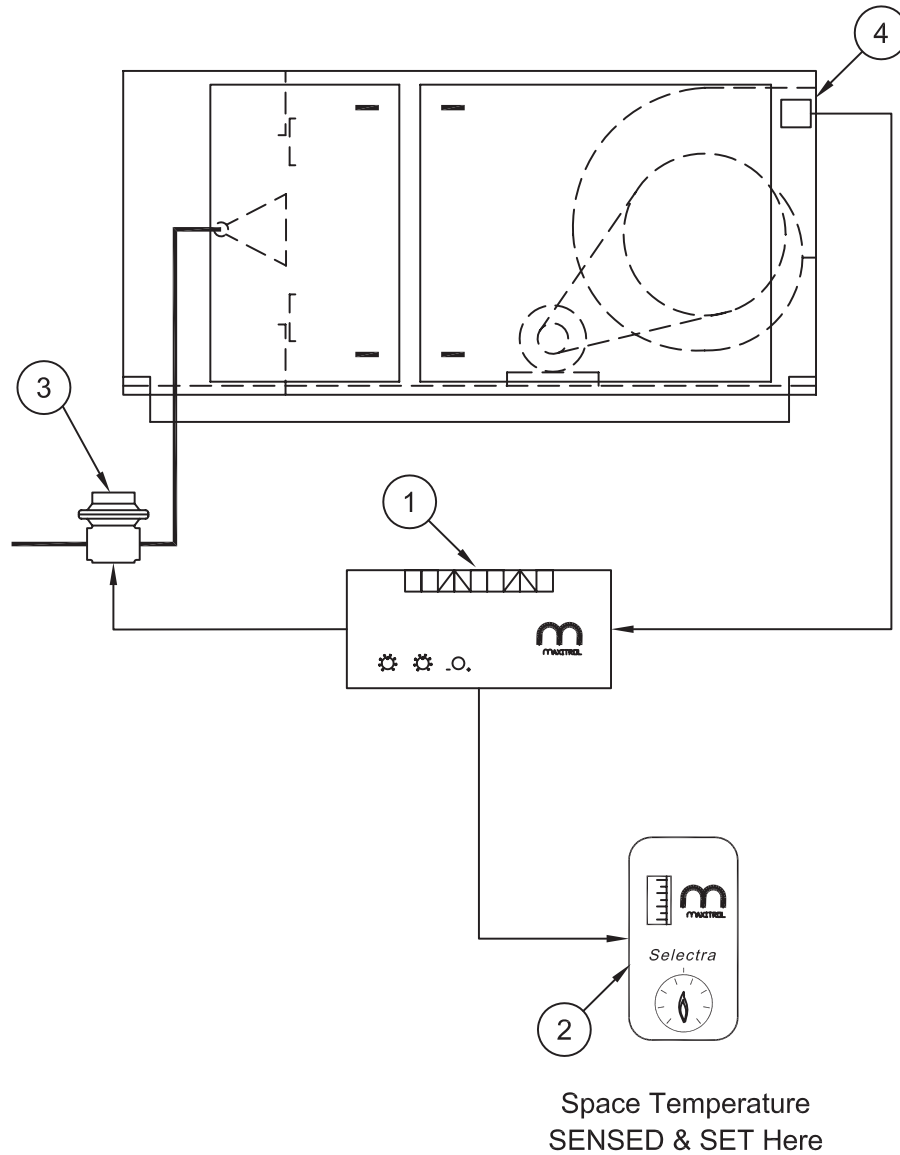

Electrical Data and Sequence of Operation

Amp Draw Table

| ITEM | SOURCE | Amps | MOTOR HORSEPOWER | | | | | | | |
|---------------------|---------------------|---------------------|----------------------|------|---------------------------------|-------|---------------------------------|-------|-----------------------------------|-------|
| | | | 1 | 1½ | 2 | 3 | 5 | 7½ | 10 | 15 |
| A | Blower Motor | AMPS for 208V 3 Ph. | 4.6 | 6.6 | 7.5 | 10.6 | 16.7 | 24.2 | 30.8 | 46.2 |
| | | AMPS for 230V 3 Ph. | 4.2 | 6.0 | 6.8 | 9.6 | 15.3 | 22.0 | 28.8 | 42.0 |
| | | AMPS for 460V 3 Ph. | 2.1 | 3.0 | 3.4 | 4.8 | 7.6 | 11.0 | 14.4 | 21.0 |
| | | AMPS for 575V 3 Ph. | 1.7 | 2.4 | 2.7 | 3.9 | 6.1 | 9.0 | 11.5 | 17.0 |
| | | Amps | 20 | 25 | 30 | 40 | 50 | 60 | 75 | 100 |
| | | AMPS for 208V 3 Ph. | 59.4 | 74.8 | 88.0 | 114.0 | 143.0 | 169.0 | 211.0 | 273.0 |
| | | AMPS for 230V 3 Ph. | 54.0 | 68.0 | 80.0 | 104.0 | 130.0 | 154.0 | 192.0 | 248.0 |
| | | AMPS for 460V 3 Ph. | 27.0 | 34.0 | 40.0 | 52.0 | 65.0 | 77.0 | 96.0 | 124.0 |
| AMPS for 575V 3 Ph. | 22.0 | 27.0 | 32.0 | 41.0 | 52.0 | 62.0 | 77.0 | 99.0 | | |
| B | Control Transformer | Amps | CONTROL CIRCUIT AMPS | | | | | | | |
| | | | Heating Unit Only | | Heating Unit w/One Evap. Module | | Heating Unit w/Two Evap. Module | | Heating Unit w/Three Evap. Module | |
| | | AMPS for 208V 3 Ph. | 2.4 | | 7.2 | | 9.6 | | 12.0 | |
| | | AMPS for 230V 3 Ph. | 2.2 | | 6.5 | | 8.7 | | 10.9 | |
| | | AMPS for 460V 3 Ph. | 1.1 | | 3.3 | | 4.3 | | 5.4 | |
| | | 0.9 | | 2.6 | | 3.5 | | 4.3 | | |

NOTES: 1) Above motor amps are based on 2011 edition of NEC.
2) Control circuit amps are based on standard controls.


Steps to size optional disconnect switch:

1. Find the blower motor HP required from tables on pages 4 and 5.
2. Find amp draw for required motor HP from chart in item A above.
3. Find amps for control circuit from chart in item B above.
4. Add amps from step 2 and step 3, then multiply by 1.25.

Sequence of Operation – Return Air Units

P000621

OPERATION WITH RETURN AIR UPSTREAM OF BURNER

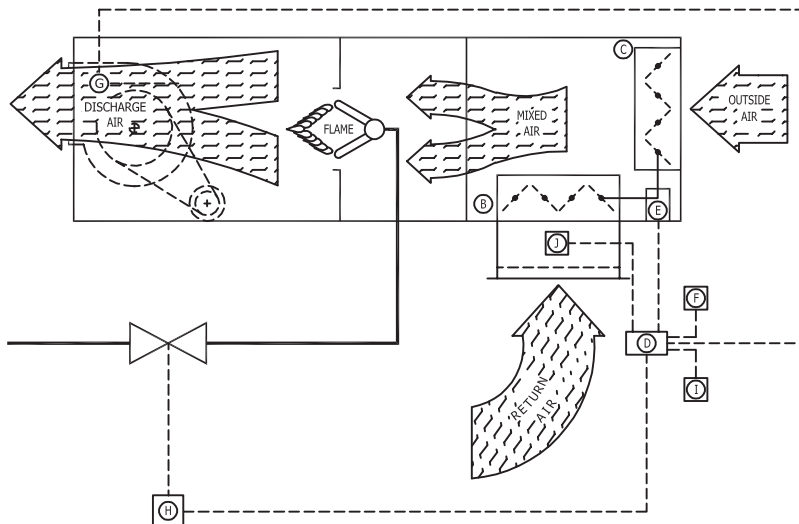

Signal from remote control I to TracRite Controller D, sets operational parameters for dampers B and C, and burner. Damper operation can be manual, building pressure or mixed air temperature.




Return air dampers B, and outside air dampers C, are interlocked to move together. As one opens, the other closes. As the return air dampers open, allowing more return air to enter the unit, the outside air dampers move toward the closed position, decreasing the amount of outside air. Pressure sensor and flow station J, senses change in return airflow and signals TracRite Controller D.

Modulating gas valve H, regulates gas supply in response to signal from TracRite Controller D. TracRite Controller D, varies signal based on input from room temperature sensor F, discharge temperature sensor G, and airflow sensor J. Gas valve H can provide approximately 4% to 100% of rated burner capacity.

Gas Piping Layout

Schematic Component Diagrams

C000148

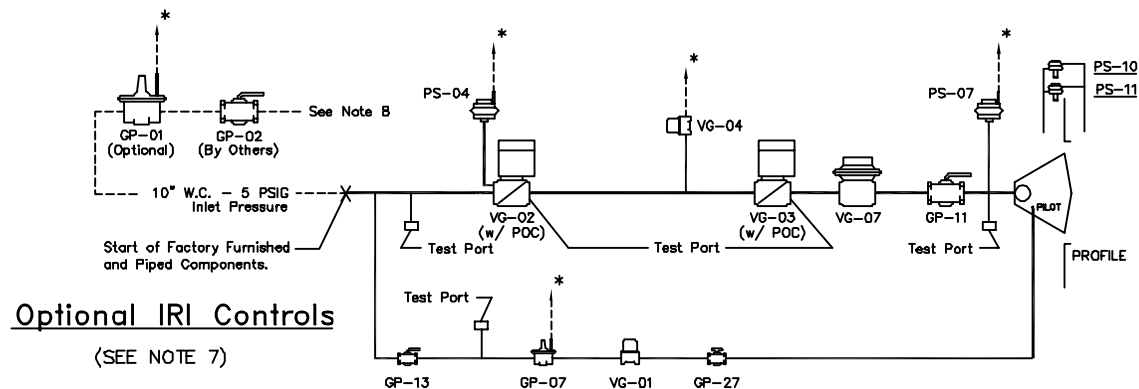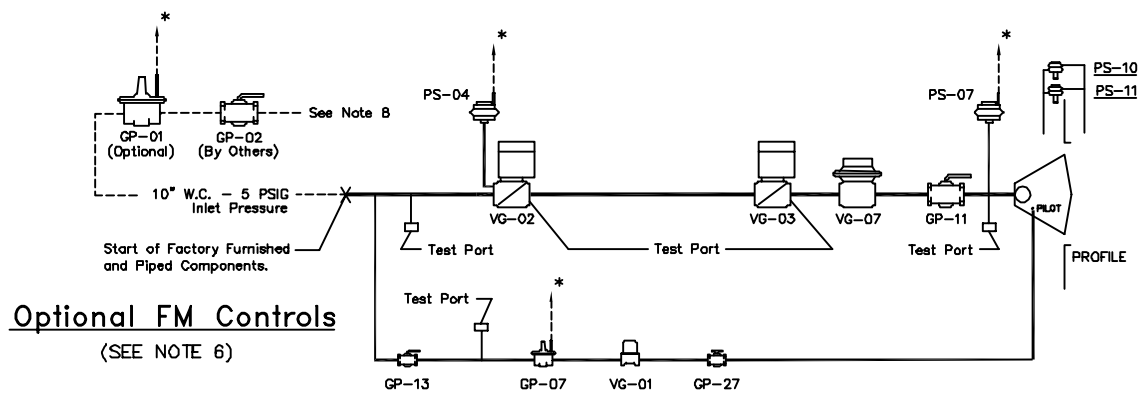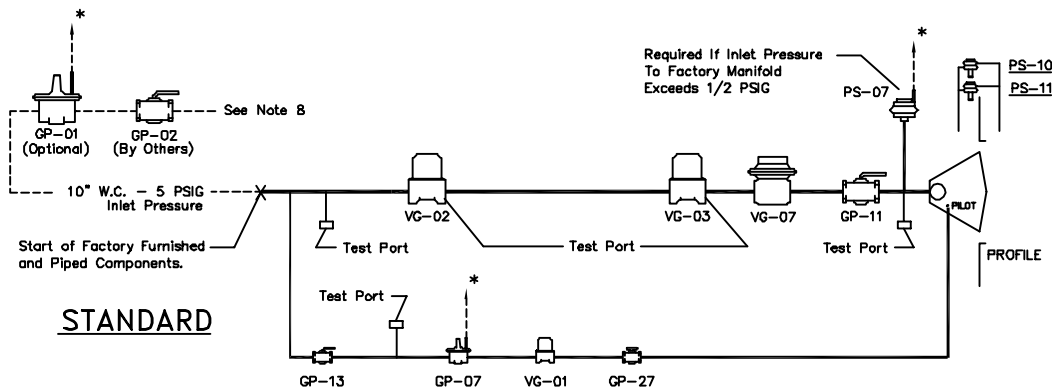

COMPONENT IDENTIFICATION

| | |
|-------|---------------------------------|
| GP-01 | HIGH GAS PRESSURE REGULATOR |
| GP-02 | MAIN GAS SHUT-OFF VALVE |
| GP-09 | PILOT GAS PRESSURE REGULATOR |
| GP-11 | MAIN TEST FIRING SHUT-OFF VALVE |
| GP-13 | PILOT GAS SHUT-OFF VALVE |
| GP-27 | ORIFICED NEEDLE VALVE |
| VG-01 | PILOT GAS VALVE |
| VG-02 | MAIN GAS VALVE |
| VG-03 | AUXILIARY GAS VALVE |
| VG-04 | NORMALLY OPEN VENT VALVE |
| VG-07 | MODULATING VALVE |
| PS-04 | LOW GAS PRESSURE SWITCH |
| PS-07 | HIGH GAS PRESSURE SWITCH |
| PS-10 | HIGH VELOCITY PRESSURE SWITCH |
| PS-11 | LOW VELOCITY PRESSURE SWITCH |


NOTES:

1. Vent limiting devices provided wherever possible, when venting is required* the venting to outside is by others on indoor units and furnished by factory on outdoor units.
2. Units with 900 MBH and less use a pressure regulator (not shown) for high fire setting.
3. For inlet pressures under 10" W.C. - Please contact factory.
4. 3,300 MBH and above will require a minimum inlet pressure of 1 PSIG. For inlet pressures under 1 PSIG - Please contact factory.
5. Units that are listed to Z83.4 standard (100% make-up air) carry both ETL and CETL approvals.
6. The standard manifold meets FM requirements for inputs under 2,500 MBH for ETL listed units.
7. The standard manifold meets IRI requirements for ETL listed units.
8. High gas pressure regulator required if inlet pressure exceeds 1/2 PSIG for inputs up to and including 900 MBH or inlet pressures over 5 PSIG for inputs greater than 900 MBH.

Weights

Unit Weights (Approximate)

C000473

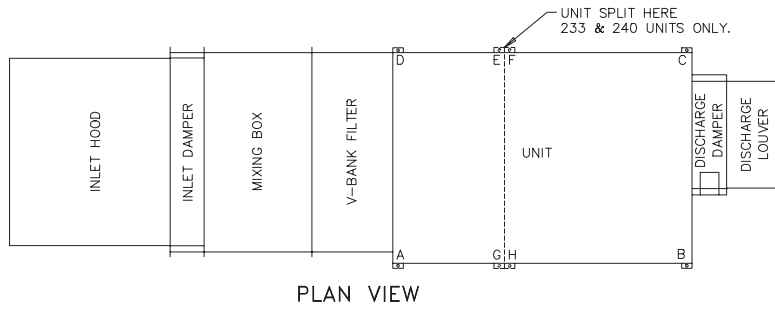

PLAN VIEW

Note: Cooling coil section weights include 6 row dry coil.


| MODEL | Basic Frame | | | | | | | | | | Inlet Hood (No Filters) | Inlet Damper | V-Bank Filter | Mixing Box |
|-------|-------------------|----------------|------|------|-----|-----|------|-----|------|------|-------------------------|--------------|---------------|------------|
| | Total Unit Weight | Corner Weights | | | | | | | | | | | | |
| | A | B | C | D | E | F | G | H | | | | | | |
| 109 | 760 | 215 | 215 | 185 | 145 | - | - | - | - | 170 | 75 | 105 | 480 | |
| 112 | 760 | 215 | 215 | 185 | 145 | - | - | - | - | 170 | 75 | 105 | 480 | |
| 115 | 760 | 215 | 215 | 185 | 145 | - | - | - | - | 170 | 75 | 105 | 480 | |
| 118 | 810 | 225 | 225 | 200 | 160 | - | - | - | - | 170 | 75 | 105 | 480 | |
| 120 | 1185 | 331 | 331 | 272 | 251 | - | - | - | - | 270 | 125 | 175 | 700 | |
| 122 | 1227 | 344 | 344 | 282 | 257 | - | - | - | - | 270 | 125 | 175 | 700 | |
| 125 | 1824 | 510 | 510 | 420 | 384 | - | - | - | - | 290 | 140 | 240 | 950 | |
| 130 | 1920 | 538 | 538 | 442 | 402 | - | - | - | - | 290 | 140 | 240 | 950 | |
| 215 | 1180 | 342 | 342 | 274 | 222 | - | - | - | - | 275 | 135 | 175 | 700 | |
| 218 | 1300 | 378 | 378 | 311 | 233 | - | - | - | - | 275 | 135 | 175 | 700 | |
| 220 | 2280 | 625 | 625 | 555 | 475 | - | - | - | - | 320 | 200 | 230 | 980 | |
| 222 | 2370 | 675 | 675 | 545 | 475 | - | - | - | - | 320 | 200 | 230 | 980 | |
| 225 | 2990 | 824 | 824 | 732 | 610 | - | - | - | - | 500 | 275 | 340 | 1270 | |
| 230 | 3130 | 863 | 863 | 731 | 673 | - | - | - | - | 720 | 275 | 340 | 1270 | |
| 233 | 6393 | 517 | 1139 | 936 | 421 | 382 | 973 | 490 | 1535 | 775 | 350 | 550 | 2200 | |
| 240 | 8675 | 557 | 1625 | 1361 | 451 | 413 | 1395 | 529 | 2344 | 1050 | 500 | 675 | 2750 | |

| MODEL | Air Flow Station | Discharge Damper | Discharge Louver | Cooling Coil Section | Add For Vertical Units | Roof Curb | | | | | | | |
|-------|------------------|------------------|------------------|----------------------|------------------------|-------------|--------------------------|--------------------------------|---|-------------|--------------------------|--------------------------------|---|
| | | | | | | 12" High | | | | 18" High | | | |
| | | | | | | Basic Frame | Basic Frame w/Mixing Box | Basic Frame w/Cooling Coil Box | Basic Frame w/Mixing Box & Cooling Coil Box | Basic Frame | Basic Frame w/Mixing Box | Basic Frame w/Cooling Coil Box | Basic Frame w/Mixing Box & Cooling Coil Box |
| 109 | 47 | 30 | 70 | 1010 | 224 | 160 | 230 | 300 | 380 | 215 | 315 | 416 | 530 |
| 112 | 47 | 30 | 70 | 1010 | 224 | 160 | 230 | 300 | 380 | 215 | 315 | 416 | 530 |
| 115 | 47 | 30 | 70 | 1500 | 224 | 160 | 230 | 360 | 440 | 215 | 315 | 500 | 615 |
| 118 | 47 | 30 | 70 | 1500 | 224 | 160 | 230 | 360 | 440 | 215 | 315 | 500 | 615 |
| 120 | 68 | 55 | 85 | 2580 | 475 | 215 | 300 | 460 | 550 | 300 | 410 | 640 | 765 |
| 122 | 68 | 55 | 85 | 2580 | 475 | 215 | 300 | 460 | 550 | 300 | 410 | 640 | 765 |
| 125 | 80 | 85 | 140 | 4180 | 590 | 235 | 320 | 535 | 630 | 320 | 440 | 745 | 890 |
| 130 | 80 | 85 | 140 | 4180 | 590 | 235 | 320 | 535 | 630 | 320 | 440 | 745 | 890 |
| 215 | 80 | 100 | 150 | 2420 | 427 | 215 | 285 | 425 | 505 | 295 | 395 | 590 | 700 |
| 218 | 80 | 100 | 150 | 2420 | 427 | 215 | 285 | 425 | 505 | 295 | 395 | 590 | 700 |
| 220 | 111 | 145 | 215 | 3405 | 899 | 285 | 365 | 545 | 635 | 395 | 505 | 755 | 880 |
| 222 | 111 | 145 | 215 | 3405 | 899 | 285 | 365 | 545 | 635 | 395 | 505 | 755 | 880 |
| 225 | 135 | 210 | 230 | 5420 | 1145 | 320 | 405 | 630 | 730 | 440 | 560 | 875 | 1010 |
| 230 | 135 | 210 | 230 | 5420 | 1145 | 320 | 405 | 630 | 730 | 440 | 560 | 875 | 1010 |
| 233 | 190 | 230 | 300 | NA | 1100 | 375 | 470 | NA | NA | 515 | 645 | NA | NA |
| 240 | 221 | 250 | 350 | NA | 1300 | 450 | 535 | NA | NA | 605 | 735 | NA | NA |

APPROXIMATE WEIGHT (LBS.)

Note: See pages 24-27 for weights of 4 (F, R) and 8 (F, R) discharge options.

Cabinet Arrangements

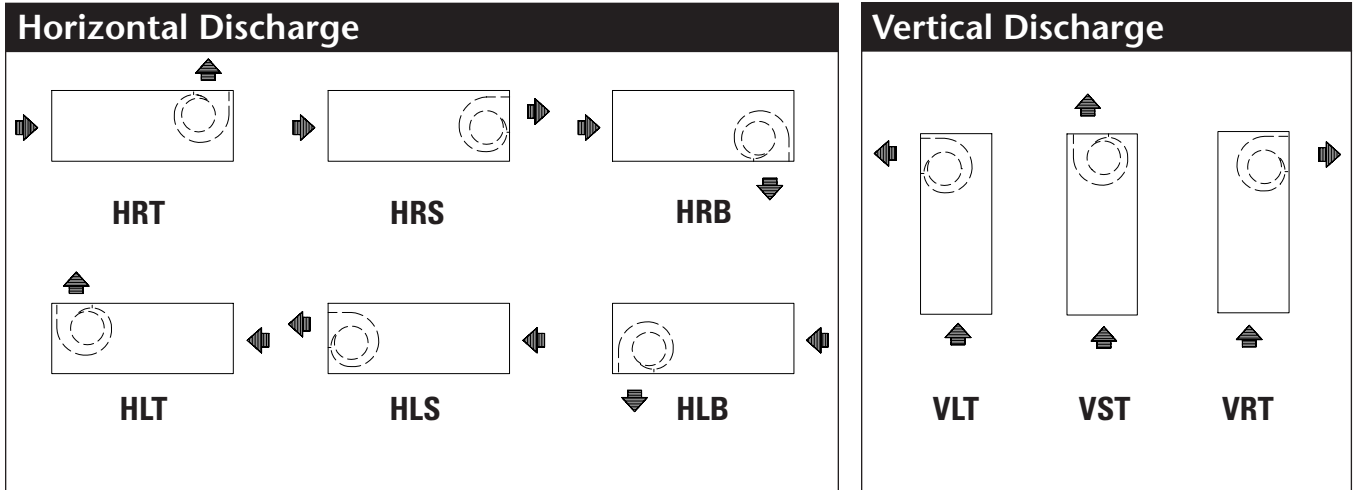

For all arrangements shown, controls are on near side.

Guide Specification – Base Unit



Base Bid Temprite model TMC _____ make-up air unit(s) designed for outdoor application. The unit discharge shall be designed for easy adaptation to external duct work or optional accessories. The unit(s) shall be capable of delivering _____ cfm at _____ ESP using a _____ horsepower (ODP) (TEFC) motor operating on (208/3/60) (230/3/60) (460/3/60).

BURNER SECTION

The line burner shall be capable of delivering _____ BTUH firing on (natural gas) (propane) at an inlet pressure of _____ (inches water column) (PSIG). The standard ETL listed unit will meet ANSI, FM, and IRI requirements. Both burner and blower shall be compensated for an altitude of _____ feet above sea level. Manifold to be located outside of air stream and shielded from atmospheric conditions by means of a protective compartment with hinged access. An observation port shall be located to provide view of pilot and main flame.

Unit(s) shall be supplied with a wide range burner with a modulating turndown ratio of up to 25:1. Adjustable profile plates shall be provided and sized to maintain the require velocity across the line burner. The operation of the burner shall be programmed through the flame safeguard with timed prepurge and flame-sensed by means of an ultra violet scanner.

The burner assembly and gas manifold shall be completely prepiped and factory tested prior to shipment.

**The unit shall be controlled by:
(One of Three options, Choose one)**

Option 1

TracRite DDC control module with full BACnet compatibility. Unit shall have the TracRite (pick one):

- 1. MDT-Touch Modulating Discharge Temperature Control System.**
- 2. MRT-Touch Modulating Room Temperature Control System.**

The TracRite DDC control system shall include but not be limited to the following controls required for standard operation:

- Electronic time clock with normal, holiday, and override schedules.
- Timed freeze protection to prevent heater from discharging unheated air into the building.
- Inlet On-Off sensor which will turn burner off when inlet temperature equals desired discharge air temperature as fuel savings mode.
- On-Off night setback thermostat for lower operating temperatures in unoccupied mode as fuel savings mode.

Option 2

System 14 Discharge Temperature Control.

The System 14 control system shall include but not be limited to the following controls required for standard operation:

- Amplifier mounted in electrical control panel with sensitivity adjustments and one (1) calibrating potentiometer.
- Remote temperature selector mounted on optional Remote Control Panel and can be installed in any convenient location for remote adjustment of leaving air temperature between 55° to 90°F.
- Timed freeze protection to prevent heater from discharging unheated air into the building.
- Modulator/Regulator valve mounted in gas piping manifold that receives electrical signal from amplifier and adjusts gas pressure to maintain desired leaving air temperature.

Option 3

System 44 Room Temperature Control.

The System 44 control system shall include but not be limited to the following controls required for standard operation:

- Amplifier mounted in electrical control panel contains adjustments for maximum and minimum discharge air temperature, three (3) calibrating potentiometers and a sensitivity adjustment.
- Remote temperature Selectrstat mounted on optional Remote Control Panel and installed in heated area for adjustment of room temperature between 55° to 90°F.
- Timed freeze protection to prevent heater from discharging unheated air into the building.
- Modulator/Regulator valve mounted in gas piping manifold that receives electrical signal from amplifier and adjusts gas pressure to maintain desired room air temperature.

UNIT CASING

Unit casing and accessories shall be fabricated from heavy-gauge bright spangled galvanized steel suitably reinforced to insure rigidity. The base of the unit shall be adaptable for curb mounting. All casings shall be airtight and weatherproof. Roof panels shall be convex to prevent ponding, and designed with a standing seam to prevent water entrainment. Cabinet shall be designed with roof eaves to prevent water for getting into wall panels. Complete access shall be provided to all components though gasketed, hinged access doors. This includes the motor, blower, burner, and electrical components and manifold sections.

Guide Specification – Base Unit



BLOWER SECTION

Each unit shall be supplied with centrifugal forward curve, DWDI fan(s) rated in accordance with AMCA standards. The fan or fans shall be mounted on a heavy-duty polished steel shaft designed for a maximum operating speed not to exceed 75% of its first critical speed. Bearings are to be heavy-duty industrial prelubricated type. Blowers to be driven by a V-belt package sized with a capacity of 25% greater than the motor horsepower. Multiple belt applications will be matched sets. Drives are to be (fixed) (adjustable). Maximum outlet velocity _____ FPM. Motor to be mounted on adjustable slide base. Motor cover shall be provided for protection when control cabinet door is open.

CONTROL ENCLOSURE

The unit(s) shall be supplied with a control compartment and all controls mounted within this compartment are to be wired to a numbered terminal strip. All wiring is to be color coded and in accordance with the NEC. A circuit diagram is to be laminated to the inside of the control Cabinet door. All electrical components shall bear a recognized label.

CONTROLS

1. Main fan starters and overloads
2. Control circuit fuses
3. High temperature limit switch
4. Flame safeguard with alarm contacts
5. UV flame detection
6. Ignition transformer
7. Automatic pilot valve
8. Main gas automatic safety shutoff valve
9. Air proving differential switch
10. Control transformer

OPTIONAL EQUIPMENT

1. V-Bank filter box with 2" filters
2. Inlet hood and birdscreen with or without filters
3. Insulation
4. Full perimeter roof curb (horizontal units only)
5. Vibration feet
6. Clogged filter indication
7. Disconnect switch
8. High gas pressure regulator (required for inlet pressure over 1/2 PSIG)
9. Vertical arrangement with support stand and birdscreen
10. Mixing dampers with or without return air flow station
11. Return air after the burner
12. Evaporative cooling module(s) with transitions
13. CW or DX cooling coil section (up to 50,000 CFM)
14. Internal blower/motor isolation
15. Firestat
16. 115 Volt service receptacle
17. Touchscreen (for DDC Control systems only)
18. FM or IRI controls
19. Fixed or revolving discharge
20. Electronic time clock (Not available with Touch DDC Control Systems)
21. On-off night setback thermostat (Not available with Touch DDC Control Systems)
22. NEMA 1 or NEMA 12 remote control panel (System 14 or System 44 controls only)
23. VFD controller
24. Exhaust interlock
25. Interlocking relay

: Guide Specification – Mixing Dampers with Return Flow Station



Unit(s) shall have outside air and return air dampers with modulating actuator controlled by TracRite DDC control system (Patent #7,059,536). The TracRite DDC control system shall have capability to digitally control the outside air quantity from a nominal minimum of 20% to 100% with integrated gas valve control at all room concentrations of CO₂.

The return air inlet shall include a self-calibrating flow measuring station with a grid of velocity pressure probes with spacing no greater than 12" over the entire face of the return air opening and sampled every second. Samples are averaged to provide smooth, accurate data that is delivered to the TracRite DDC control system every second. The DDC control system shall be capable of electronically displaying the return air/outside air ratio within 5% accuracy at all damper positions.

The TracRite DDC control system shall be capable of controlling mixing dampers in: (Choose One)

MANUAL MODE:

The "Manual" mode allows manual positioning of the outside air (O.A.) damper and return air (R.A.) damper by changing the damper position setpoint.

MIXED AIR TEMPERATURE MODE:

The "Mixed Air Temperature" mode shall provide automatic control of the mixed air temperature by modulating the outside air (O.A.) damper and return air (R.A.) damper to maintain the mixed air temperature setpoint.

BUILDING PRESSURE MODE:

The "Building Pressure" mode shall provide automatic building pressure control by modulating the outside air (O.A.) damper and return air (R.A.) damper to maintain the indoor building pressure setpoint. As the building pressure decreases below the setpoint more outside air will be introduced.

: Guide Specification – Touchscreen Controller



The display functions of the remote touchscreen display for the TracRite DDC control system shall include but not be limited to the following:

- Return air temperature
- Outside air temperature
- Discharge air temperature
- Mixed air temperature
- Maximum allowable temperature rise
- Actual temperature rise
- Current percent of outside air
- Current building pressure (optional)
- Current damper input voltage (optional)
- Current burner input voltage
- Fan operating hours since last reset
- Fan start cycle count since last reset
- Burner operating hours since last reset
- Burner start cycle count since last reset
- Cooling interlock operating hours since last reset
- Cooling interlock cycle count since last reset
- Critical alarm conditions:
 - Airflow switch failure
 - Unit on, fan off
 - Unit off, fan on
 - Low discharge temperature
 - Safety circuit open
 - Burner jumped

The control settings available on the remote touchscreen display for the TracRite DDC control system shall include but not be limited to the following:

- Heating setpoint
- Cooling setpoint
- Economizer setpoint
- Setback setpoint
- Freeze protection setpoint
- Maximum discharge air temperature setpoint
- Minimum discharge air temperature setpoint
- Minimum ventilation option and setpoint
- Time of day schedule selection and setpoints (Not available on MDT or MRT Control Systems)
 - Normal 5/7 schedule
 - Holiday schedule
 - Manual override



Efficient Direct Fired Gas Heating System

Choose Temprite Direct Fired Gas Heating

- Heat large or small spaces with 100% combustion efficiency
- Constantly replace contaminated indoor air with fresh, heated outside air
- Optional evaporative cooling
- Low operating and maintenance costs
- Fresh air ventilation anytime — just turn off the gas heating system
- Simple, inexpensive installation
- Temprite, a leader in research, engineering, and customer service since 1963
- Fans tested to AMCA standards to insure rated airflow

Temprite

www.tempriteheating.com

4830 Transport Drive Dallas TX 75247

Telephone 214.638.6010