


Steel Control Damper • 5½" Deep • Airfoil Blade • 150°F Max Temperature • Parallel (AGA) or Opposed (AGB)

Standard Construction and Materials

- FRAME:** 5½" x 7⁄8" x 16-GA galvanized steel hat channel.
- BLADE:** Airfoil shaped, double skin galvanized steel construction, 6¼" wide.
- LINKAGE:** Plated steel tie bar and crank plates with stainless steel pivots contained in jamb.
- BEARINGS:** Heavy duty molded nylon.
- AXLES:** 3⁄8" square steel.
- DRIVESHAFT:** 3⁄8" square steel, extendable 6" beyond damper frame.
- SEALS:** Silicone on blade edges, and stainless steel at jambs.
- STOPS:** Galvanized steel angle at head and sill.
- FINISH:** Mill.

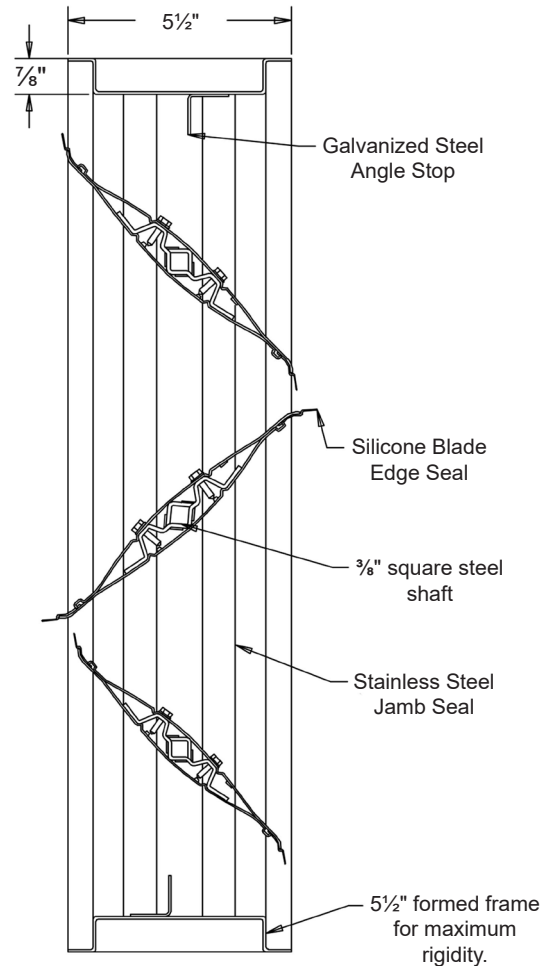

Options


- Exact Size
- Material - 304 Stainless Steel
- Face/Bypass - Vertical, Horizontal, or Perpendicular
- Sleeve - Transition - Sideplate
- Vertical Blades
- Flange - Front, Rear, or Both
- Blade Seal - Vinyl
- Jamb Seal - Stainless Steel
- Jackshafting
- Actuators - Manual Quadrants, 120V, 24V, 230V or Pneumatic
- Position Indication Switch - PK1200, Small Aux Switch, or Integral to Actuator
- Transformers
- Explosion Proof Housing
- Pilot Positioner
- Copper Tubbing
- Tab-Lock Retaining Angles - 1 or 2 Sets
- Bearings - OIB or Stainless Steel
- Axle - Stainless Steel
- Security Bars
- Finishes - Baked Enamel, Baked Epoxy, or Prime Coat

Notes

1. Nominal deductions will be made to the opening size given.
2. Depending upon damper height, a variable width blade may be required, which will extend to a maximum of 3¼" from either the front or back of the damper. Contact the factory if the exact dimensions of this variable blade are critical.
3. Shipping weight approximately 6.5 lbs./sq.ft.

Damper Sizes

| Panels | Min Panel | Max Single Panel |
|----------------|------------|------------------|
| Parallel Blade | 8"W x 7"H | 48"W x 72"H |
| Opposed Blade | 8"W x 14"H | 48"W x 72"H |

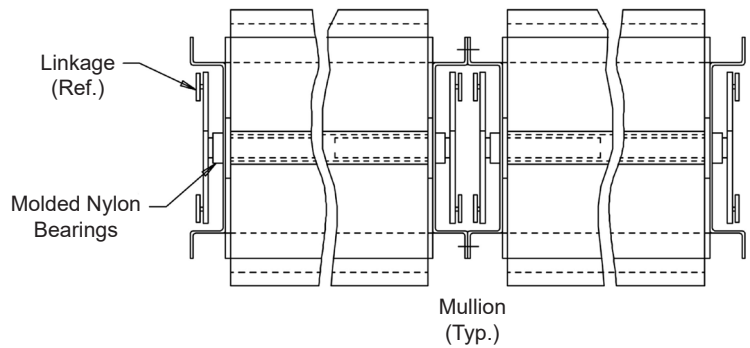

| Item # | Qty | Damper Size | | Parallel Blades | Opposed Blades | Seals | Actuator Model | Interior | Exterior | N.C. | N.O. | Union Made |
|---------------|-----|-------------|--------|-----------------|----------------|-------|----------------|---------------|----------|----------|------|------------|
| | | Width | Height | | | | | Act. Location | | Function | | |
| Arch. / Eng.: | | | | | | EDR: | | ECN: | | Job: | | |
| Contractor: | | | | | | | | | | | | |
| Project: | | | | | | Date: | | DWN: | | DWG: | | |

In the interest of product development, CESCO Products reserves the right to make changes without notice.





450 Riverside Dr • Wyalusing PA, 18853
 Phone: 570-746-1888 • Fax: 570-746-9286
 www.cescoproducts.com

Steel Control Damper • 5½" Deep • Airfoil Blade • 150°F Max Temperature • Parallel (AGA) or Opposed (AGB)

Pressure Limitations


The pressure limitations shown below are based on the design limits of the axles or blade deflection. Another model should be selected if pressure exceeds the values shown.

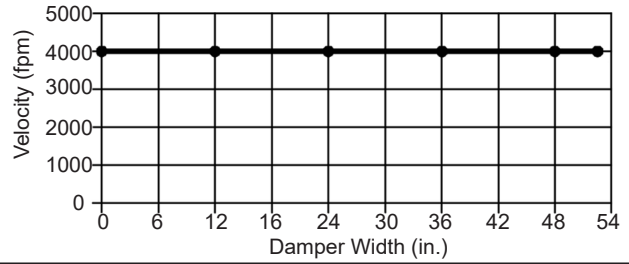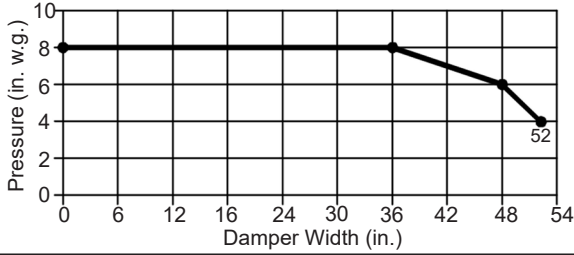

Pressure Drop

Pressure Drop Ratings are tested in accordance with AMCA Standard 500 using test set-up Fig. 5.3 for dampers installed with duct upstream and downstream. Static pressures are corrected to .075 lb./cu.ft. air density.

NOTE: Curves are shown for the two sizes indicated. Pressure Drops will be somewhat lower for larger sizes and somewhat higher for smaller sizes.

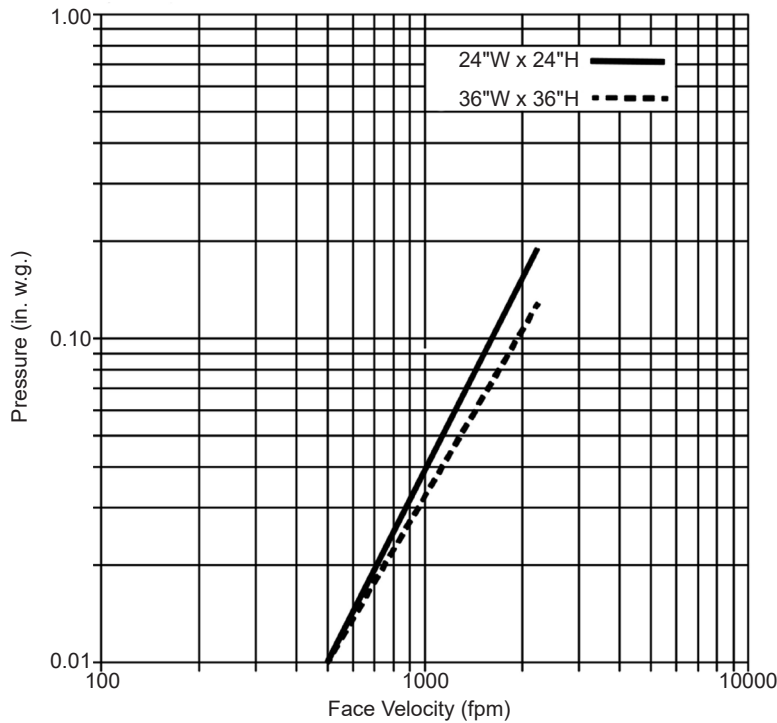

Air Leakage

Leakage for Models AGA and AGB shall not exceed 4.0 CFM per sq.ft. at 1 in. w.g. differential pressure and at a temperature of 70°F. Data are based on a seating torque of 40 in. lbs. for dampers less than 4 sq.ft. in size. Dampers above 4 sq.ft., .5 in.lbs. per sq.ft. is applied to hold the damper in the closed position. Data is based on a 48\"/>

Values shown in the note above are derived from tests performed in accordance with AMCA Standard 500 and are stated in SCFM at 1 in. w.g. Use the conversion factors in the table below for leakage values at greater pressures.

| Pressure | Conversion Factor |
|------------|-------------------|
| 2 in. w.g. | 1.41 |
| 3 in. w.g. | 1.73 |
| 4 in. w.g. | 2.00 |